



THURBER ENGINEERING LTD.

**FOUNDATION INVESTIGATION REPORT
GENEVA STREET UNDERPASS
BRIDGE REHABILITATION
HIGHWAY 406
ST. CATHARINES, ONTARIO
G.W.P. 2257-13-00; SITE No. 18-230**

GEOCRES NO. 30M3-293

Report

to

WSP / MMM Group

Date: January 23, 2017
File: 11336



TABLE OF CONTENTS

PART 1: FACTUAL INFORMATION

1.	INTRODUCTION	1
2.	SITE DESCRIPTION	1
3.	INVESTIGATION PROCEDURES	2
4.	LABORATORY TESTING	3
5.	DESCRIPTION OF SUBSURFACE CONDITIONS	3
5.1	Pavement Structure and Concrete Slab.....	4
5.2	Sand and Gravel Fill	4
5.3	Silty Sand Fill and Silty Clay Fill (Embankment Fill)	5
5.4	Clayey Silt Till.....	6
5.5	Groundwater Conditions	7
6.	MISCELLANEOUS	7

APPENDICES

Appendix A	Record of Borehole Sheets
Appendix B	Laboratory Test Results
Appendix C	Borehole Location and Soil Strata Drawing
Appendix D	Selected Photographs of the site



**FOUNDATION INVESTIGATION REPORT
GENEVA STREET UNDERPASS
BRIDGE REHABILITATION
HIGHWAY 406
ST. CATHARINES, ONTARIO
G.W.P. 2257-13-00; SITE No. 18-230

GEOCRES NO. 30M3-293**

PART 1: FACTUAL INFORMATION

1. INTRODUCTION

This report presents the factual data obtained from a foundation investigation conducted by Thurber Engineering Ltd. (Thurber) for the proposed rehabilitation of the existing underpass bridge located on Highway 406 at Geneva Street, in St. Catharines, Ontario.

The purpose of this investigation was to explore the subsurface conditions at the underpass location and, based on the data obtained, to provide a borehole location plan, stratigraphic profile, records of boreholes, laboratory test results, and a written description of the subsurface conditions.

Thurber was retained by WSP / MMM Group (MMM) to carry out this foundation investigation under the MTO Assignment Number 2014-E-0030.

2. SITE DESCRIPTION

The underpass is located at the interchange between Geneva Street and Highway 406 in St. Catharines, Ontario.

Geneva Street crosses over Highway 406 on a three-span concrete structure of approximately 85.3 m in length. At this location, the highway is constructed in a 4 m cut while Geneva Street is elevated with 4 m of fill, resulting in approach embankments in the order of 8 m in height. Both abutments are perched within the forward slopes.

The terrain adjacent to the structure is generally flat. Residential dwellings and commercial buildings are located around the interchange area.

Selected photographs of the immediate surroundings are presented in Appendix D.

Client: WSP / MMM Group

Date: January 23, 2017

File No.: 11336

Page: 1 of 9

E file: H:\10000+\11336 8 Bridge Rehab Hwys 406 & 140\Reports & Memos\Geneva Street\FINAL\11336 406 Geneva St Underpass FIR jan 17.docx



The site is situated within the physiographic region known as the Haldimand Clay Plain, which is characterized by glacio-lacustrine deposits laid down in glacial Lake Warren during the Wisconsinian Age. These deposits consist of silts and clays and are generally underlain by a glacial till, which in turn overlies dolomitic limestone bedrock.

3. INVESTIGATION PROCEDURES

The site investigation and field testing for this project were carried out on December 20 and 21, 2016 and consisted of drilling and sampling four boreholes (numbered GS 16-01 to GS 16-04) at the site. The boreholes were located on Geneva Street near the existing approaches and abutments. All the boreholes were terminated at 8.2 m depth (Elevations 93.9 to 94.6).

Prior to the start of drilling, the borehole locations were marked/staked in the field and utility clearances were obtained. The co-ordinates of the boreholes were obtained by Thurber using a GPS device. The elevations of the as-drilled boreholes were subsequently provided by MMM. The approximate locations of boreholes drilled at the Geneva Street Underpass are shown on a Borehole Locations and Soil Strata drawing included in Appendix C. The coordinates and elevations of these boreholes are given on this drawing and on the individual Record of Borehole Sheets in Appendix A.

A truck-mounted D25 drill rig was used to drill and sample the boreholes. Solid stem augers were used to advance the boreholes until the target depth was reached. In general, soil samples were obtained at selected intervals using a 50 mm nominal diameter split spoon sampler in conjunction with the Standard Penetration Testing (SPT).

The drilling and sampling operations were supervised on a full time basis by a member of Thurber's technical staff. The supervisor logged the boreholes and processed the recovered soil samples for transport to Thurber's laboratory for further examination and testing. Results of field drilling and sampling are presented on the Record of Borehole sheets in Appendix A.

Groundwater conditions in the open boreholes were observed throughout the drilling operations. Standpipe piezometers were installed in Boreholes GS 16-02 and GS 16-03. The piezometers consisted of a 19 mm Schedule 40 PVC pipe with a 1.5 m long slotted screen enclosed in filter sand to permit groundwater level monitoring. Piezometer installation details, groundwater level observations and water level readings are shown on the Record of Borehole sheets. Upon completion of the drilling operations, the boreholes without piezometers were abandoned in



general accordance with Ontario Regulation 903 amended by Ontario Reg. 372. The details of standpipe piezometer installation and borehole completion are summarized in Table 3.1.

Table 3.1 – Borehole Completion Details

Foundation Element	Borehole No.	Borehole Depth / Base Elevation (m)	Piezometer Tip Elevation (m)	Completion Details
North Approach	GS 16-01	8.2/94.2	None installed	Borehole backfilled with auger cuttings to 0.1 m, then concrete to surface.
Near North Abutment	GS 16-02	8.2/93.9	7.6/94.5	Borehole backfilled with sand filter from 8.2 m to 6.1 m, bentonite holeplug from 6.1 m to 5.5 m, auger cuttings from 5.5 m to 0.10 m, then concrete to surface.
Near South Abutment	GS 16-03	8.2/94.3	7.6/94.9	Borehole backfilled with sand filter from 8.2 m to 6.1 m, bentonite holeplug from 6.1 m to 5.5 m, auger cuttings from 5.5 m to 0.15 m, then concrete to surface.
South Approach	GS 16-04	8.2/94.6	None installed	Borehole backfilled with auger cuttings to 0.1 m, then concrete to surface.

4. LABORATORY TESTING

The recovered soil samples were subjected to Visual Identification (VI) and to natural moisture content determination. Selected samples were also subjected to grain size analysis and Atterberg Limits testing. All the laboratory tests were carried out in accordance to MTO and/or ASTM Standards, as appropriate. The results of the laboratory testing are summarized on the Record of Borehole sheets in Appendix A and are presented on the figures included in Appendix B.

5. DESCRIPTION OF SUBSURFACE CONDITIONS

Reference is made to the Record of Borehole sheets in Appendix A for details of the encountered soil stratigraphy. A soil profile of the Geneva Street Underpass site is presented on the “Borehole Locations and Soil Strata” drawing in Appendix C. An overall description of the stratigraphy is given in the following paragraphs. However, the factual data presented in the Record of Borehole sheets governs any interpretation of the site conditions. It must be recognized that soil conditions



may vary between and beyond borehole locations. More detailed descriptions of the individual strata are presented below.

In general, the subsurface conditions encountered in the boreholes drilled at the Geneva Street Underpass consist of asphalt and concrete (approach) slab underlain by granular fill which overlies silty clay and silty sand embankment fill. A deposit of native clayey silt till was contacted below the fill in all the boreholes. Groundwater levels are generally in the order of 3.4 m and 6.1 m below ground surface, at the north and south approaches, respectively. More detailed descriptions of the individual stratum are presented below.

5.1 Pavement Structure and Concrete Slab

The four boreholes were advanced from the top of the road embankment.

Boreholes GS 16-01, GS 16-02 and GS 16-04 encountered between 75 mm and 100 mm of asphalt surficially. A 25 mm thick layer of concrete was contacted surficially in Borehole GS 16-03 which was drilled through the south approach slab.

Granular fill was encountered below the asphalt and concrete in all the boreholes. The granular fill consisted of a brown to grey gravelly sand with some silt. The thickness of the granular fill ranged from 0.6 m in Borehole GS16-04 to 1.3 m in Borehole GS 16-01.

The depth to the base of the gravelly sand fill ranged from 0.7 m to 1.4 m (Elevations 101.0 to 102.1 m).

In Borehole GS 16-01, an SPT 'N' value of 49 blows for 0.3 m penetration was recorded in the granular fill indicating a dense condition. Moisture contents of the granular fill ranged from 3 percent to 8 percent.

5.2 Sand and Gravel Fill

Brown sand and gravel fill (possibly abutment wall backfill) containing trace to some silt and clay, was contacted in Boreholes GS 16-02 and GS 16-03 underlying the granular fill at the north and south abutment areas. The thickness of the sand and gravel fill was 2.2 m and 1.5 m in Boreholes GS 16-02 and GS 16-03, respectively.

The depth to the base of the sand and gravel fill was 2.9 m and 2.2 m (Elevations 99.2 and 100.3m) in Boreholes GS 16-02 and GS 16-03, respectively.



In Borehole GS 16-03, SPT 'N' values obtained in the sand and gravel fill were 17 and 34 blows for 0.3 m penetration, indicating a compact to dense state,. In Borehole GS 16-02, the SPT 'N' values ranged from 65 to 78 blows per 0.3 m of penetration indicating a very dense state. Moisture contents of the sand and gravel fill typically ranged from 3 percent to 5 percent. An occasional value of 44 percent was recorded in Borehole GS 16-03.

The results of grain size analyses conducted on two sand and gravel fill samples are presented on the Record of Borehole sheets in Appendix A, and are illustrated in Figure B1 of Appendix B. The laboratory test results are summarized in the following table.

Soil Particle	Percentage (%)
Gravel	35 to 50
Sand	38 to 47
Silty and Clay	12 to 18

5.3 Silty Sand Fill and Silty Clay Fill (Embankment Fill)

Brown to greyish brown silty sand fill containing some gravel and trace to some clay, was contacted in Boreholes GS 16-02 and GS 16-04 at 2.9 m depth and 0.7 m depth, respectively. The thickness of the silty sand fill was between 0.4 m and 0.9 m. Greyish brown silty clay fill, some sand to with sand, some gravel and occasional asphalt fragments, was contacted at the south abutment and south approach areas (Boreholes GS 16-03 and GS 16-04) below the sand and gravel fill and silty sand fill. The thickness of the silty clay fill ranged from 1.9 m to 2.7 m.

The depth to the base of the combined silty sand fill and silty clay fill ranged from 3.8 m to 4.1 m (Elevations 98.3 to 99.0 m).

SPT 'N' values obtained in the silty sand fill were 14 and 38 blows for 0.3 m penetration, indicating a compact to dense state. Moisture contents of the silty sand fill ranged from 5 percent to 13 percent.

SPT 'N' values in the silty clay fill ranged from 15 to 55 blows for 0.3 m penetration, indicating a very stiff to hard consistency. Moisture contents of the silty clay fill ranged from 11 percent to 25 percent.

The results of grain size analyses conducted on one silty sand fill and two silty clay fill samples



are presented on the Record of Borehole sheets in Appendix A, and are illustrated in Figures B2 and B3 of Appendix B. The laboratory test results are summarized in the following table.

Soil Particle	Silty Sand Fill Percentage (%)	Silty Clay Fill Percentage (%)
Gravel	13	7 to 11
Sand	44	22 to 28
Silt	33	29 to 38
Clay	10	32 to 33

5.4 Clayey Silt Till

A deposit of brown to grey clayey silt till with sand and trace gravel, was encountered below the fill in all the boreholes. It is noted that glacial till inherently contains cobbles and boulders. All the boreholes were terminated within the clayey silt till at 8.2 m depth (Elevations 93.9 to 94.6 m).

Most SPT 'N' values recorded in the clayey silt till varied between 26 and 60 blows for 0.3 m of penetration indicating very stiff to hard consistency. Higher SPT 'N' values of greater than 50 blows for less than 0.3 m of penetration were measured near borehole termination depth in Boreholes GS16-03 and GS16-04, indicating the probable presence of cobbles or boulders. Natural moisture contents of the clayey silt till ranged from 8 percent to 17 percent.

The results of grain size analyses conducted on samples of the clayey silt till are provided on the Record of Borehole sheets in Appendix A, and illustrated in Figures B4 and B5 of Appendix B. The results are summarized as follows:

Soil Particle	Percentage (%)
Gravel	0 to 14
Sand	22 to 34
Silt	39 to 59
Clay	12 to 20

The results of Atterberg Limits tests conducted on samples of the clayey silt till are provided on the Record of Borehole sheets in Appendix A and illustrated in Figure B6 of Appendix B. The results are summarized as follows:



Index Property	Percentage (%)
Liquid Limit	26
Plasticity Index	7 to 9

The results of the Atterberg Limits testing indicate the deposit to be of low plasticity with group symbols CL and CL-ML.

5.5 Groundwater Conditions

The water levels in the boreholes were observed during the drilling operations and measured upon completion of drilling. All boreholes were open to the depths investigated and dry upon completion of drilling. Standpipe piezometers were installed in Boreholes GS 16-02 and GS 16-03 to permit longer term monitoring. Groundwater levels measured in the piezometers are presented in Table 5.1.

Table 5-1. Measured Groundwater Levels

Borehole Number	Date	Groundwater Level		Comment
		Depth (m)	Elevation (m)	
GS 16-02	January 4, 2017	3.4	98.7	Piezometer
GS 16-03	January 4, 2017	6.1	96.4	Piezometer

The values shown in Table 5-1 are short-term readings and seasonal fluctuations of the groundwater level are to be expected. In particular, the groundwater level may be at a higher elevation after periods of significant or prolonged precipitation.

6. MISCELLANEOUS

Thurber staked and/or marked the borehole locations in the field and obtained utility clearances prior to drilling. Thurber obtained the coordinates of the boreholes using a GPS device. MMM provided the ground surface elevations.

Walker Drilling of Utopia, Ontario, supplied and operated a track-mounted D25 drill rig to carry out the drilling, sampling and in-situ testing operations for the boreholes.

The drilling and sampling operations in the field were supervised on a full time basis by Mr. Omar Ali of Thurber. Geotechnical laboratory testing was carried out by Thurber in its MTO-approved



laboratory. Overall supervision of the field program was carried out by Mr. Stephane Loranger, CET.

Overall project management was provided by Dr. Sydney Pang, P.Eng. Interpretation of the field data and preparation of this report was completed by Ms. R. Palomeque Reyna, P. Eng. and Dr. Sydney Pang, P.Eng. The report was reviewed by Dr. P.K. Chatterji, P.Eng., a Designated Principal Contact for MTO Foundations Projects.



Thurber Engineering Ltd.



Rocío Palomeque Reyna, P.Eng.
Geotechnical Engineer



Sydney Pang, P.Eng.
Associate, Senior Foundations Engineer



P.K. Chatterji, P.Eng.
Review Principal, Designated MTO Contact

Client: WSP / MMM Group

File No.: 11336

E file: H:\10000+11336 8 Bridge Rehab Hwys 406 & 140\Reports & Memos\Geneva Street\FINAL\11336 406 Geneva St Underpass FIR jan 17.docx

Date: January 23, 2017

Page: 9 of 9



Appendix A

Record of Borehole Sheets

SYMBOLS, ABBREVIATIONS AND TERMS USED ON RECORDS OF BOREHOLES

1. TEXTURAL CLASSIFICATION OF SOILS

CLASSIFICATION	PARTICLE SIZE	VISUAL IDENTIFICATION
Boulders	Greater than 200mm	same
Cobbles	75 to 200mm	same
Gravel	4.75 to 75mm	5 to 75mm
Sand	0.075 to 4.75mm	Not visible particles to 5mm
Silt	0.002 to 0.075mm	Non-plastic particles, not visible to the naked eye
Clay	Less than 0.002mm	Plastic particles, not visible to the naked eye

2. COARSE GRAIN SOIL DESCRIPTION (50% greater than 0.075mm)

TERMINOLOGY	PROPORTION
Trace or Occasional	Less than 10%
Some	10 to 20%
Adjective (e.g. silty or sandy)	20 to 35%
And (e.g. sand and gravel)	35 to 50%

3. TERMS DESCRIBING CONSISTENCY (COHESIVE SOILS ONLY)

DESCRIPTIVE TERM	UNDRAINED SHEAR STRENGTH (kPa)	APPROXIMATE SPT ⁽¹⁾ 'N' VALUE
Very Soft	12 or less	Less than 2
Soft	12 to 25	2 to 4
Firm	25 to 50	4 to 8
Stiff	50 to 100	8 to 15
Very Stiff	100 to 200	15 to 30
Hard	Greater than 200	Greater than 30

NOTE: Hierarchy of Soil Strength Prediction

- 1) Laboratory Triaxial Testing
- 2) Field Insitu Vane Testing
- 3) Laboratory Vane Testing
- 4) SPT value
- 5) Pocket Penetrometer



4. TERMS DESCRIBING DENSITY (COHESIONLESS SOILS ONLY)

DESCRIPTIVE TERM	SPT "N" VALUE
Very Loose	Less than 4
Loose	4 to 10
Compact	10 to 30
Dense	30 to 50
Very Dense	Greater than 50

5. LEGEND FOR RECORDS OF BOREHOLES

SYMBOLS AND ABBREVIATIONS FOR SAMPLE TYPE	SS Split Spoon Sample	WS Wash Sample	AS Auger (Grab) Sample
	TW Thin Wall Shelby Tube Sample	TP Thin Wall Piston Sample	
	PH Sampler Advanced by Hydraulic Pressure	PM Sampler Advanced by Manual Pressure	
	WH Sampler Advanced by Self Static Weight	RC Rock Core	SC Soil Core

$$\text{Sensitivity} = \frac{\text{Undisturbed Shear Strength}}{\text{Remoulded Shear Strength}}$$

 Water Level
 Shear Strength Determination by Pocket Penetrometer

- (1) SPT 'N' Value Standard Penetration Test 'N' Value – refers to the number of blows from a 63.5kg hammer free falling a height of 0.76m to advance a standard 50 mm outside diameter split spoon sampler for 0.3 m depth into undisturbed ground.
- (2) DCPT Dynamic Cone Penetration Test – Continuous penetration of a 50 mm outside diameter, 60° conical steel point attached to "A" size rods driven by a 63.5 kg hammer free falling a height of 0.76 m. The resistance to cone penetration is the number of hammer blows required for each 0.3 m advance of the conical point into undisturbed ground.

EXPLANATION OF ROCK LOGGING TERMS






ROCK WEATHERING CLASSIFICATION

Fresh (FR)	No visible signs of weathering.
Fresh Jointed (FJ)	Weathering limited to the surface of major discontinuities.
Slightly Weathered (SW)	Penetrative weathering developed on open discontinuity surfaces, but only slight weathering of rock material.
Moderately Weathered (MW)	Weathering extends throughout the rock mass, but the rock material is not friable.
Highly Weathered (HW)	Weathering extends throughout the rock mass and the rock is partly friable.
Completely Weathered (CW)	Rock is wholly decomposed and in a friable condition, but the rock texture and structure are preserved.

DISCONTINUITY SPACING

Bedding	Bedding Plane Spacing
Very thickly bedded	Greater than 2m
Thickly bedded	0.6 to 2m
Medium bedded	0.2 to 0.6m
Thinly bedded	60mm to 0.2m
Very thinly bedded	20 to 60mm
Laminated	6 to 20mm
Thinly Laminated	Less than 6mm

SYMBOLS

	CLAYSTONE
	SILTSTONE
	SANDSTONE
	COAL
	BEDROCK

STRENGTH CLASSIFICATION

Rock Strength	Approximate Uniaxial Compressive Strength		Field Estimation of Hardness*
	(MPa)	(psi)	
Extremely Strong	Greater than 250	Greater than 36,000	Specimen can only be chipped with a geological hammer
Very Strong	100-250	15,000 to 36,000	Requires many blows of geological hammer to break
Strong	50-100	7,500 to 15,000	Requires more than one blow of geological hammer to break
Medium Strong	25.0 to 50.0	3,500 to 7,500	Breaks under single blow of geological hammer.
Weak	5.0 to 25.0	750 to 3,500	Can be peeled by a pocket knife with difficulty
Very Weak	1.0 to 5.0	150 to 750	Can be peeled by a pocket knife, crumbles under firm blows of geological pick.
Extremely Weak (Rock)	0.25 to 1.0	35 to 150	Indented by thumbnail

TERMS

Total Core Recovery: (TCR)	Core recovered as a percentage of total core run length
Solid Core Recovery:(SCR)	Percent Ratio of solid core of full cylindrical shape recovered. Expressed with respect to the total length of core run
Rock Quality Designation:(RQD)	Total length of sound core recovered in pieces 0.1m in length or larger as a % of total core run length.
Uniaxial Compressive Strength (UCS)	Axial stress required to break the specimen
Fracture Index:(FI)	Frequency of natural fractures per 0.3m of core run.

UNIFIED SOILS CLASSIFICATION





MAJOR DIVISIONS		GROUP SYMBOL	TYPICAL DESCRIPTION
COARSE GRAINED SOILS	GRAVEL AND GRAVELLY SOILS	GW	Well-graded gravels or gravel-sand mixtures, little or no fines.
		GP	Poorly-graded gravels or gravel-sand mixtures, little or no fines.
		GM	Silty gravels, gravel-sand-silt mixtures.
		GC	Clayey gravels, gravel-sand-clay mixtures.
	SAND AND SANDY SOILS	SW	Well-graded sands or gravelly sands, little or no fines.
		SP	Poorly-graded sands or gravelly sands, little or no fines.
		SM	Silty sands, sand-silt mixtures.
		SC	Clayey sands, sand-clay mixtures.
FINE GRAINED SOILS	SILTS AND CLAYS $W_L < 50\%$	ML	Inorganic silts and very fine sands, rock flour, silty or clayey fine sands or clayey silts with slight plasticity.
		CL	Inorganic clays of low to medium plasticity, gravelly clays, sandy clays, silty clays, lean clays. ($W_L < 30\%$).
		CI	Inorganic clays of medium plasticity, silty clays. ($30\% < W_L < 50\%$).
		OL	Organic silts and organic silty-clays of low plasticity.
	SILTS AND CLAYS $W_L > 50\%$	MH	Inorganic silts, micaceous or diatomaceous fine sandy or silty soils, elastic silts.
		CH	Inorganic clays of high plasticity, fat clays.
		OH	Organic clays of medium to high plasticity, organic silts.
HIGHLY ORGANIC SOILS		Pt	Peat and other highly organic soils.
CLAY SHALE			
SANDSTONE			
SILTSTONE			
CLAYSTONE			
COAL			

RECORD OF BOREHOLE No GS16-01

1 OF 1

METRIC

GWP# 2257-13-00 LOCATION Geneva Street Underpass N 4 779 865.4 E 325 959.6 ORIGINATED BY OA
 HWY 406 BOREHOLE TYPE Solid Stem Augers COMPILED BY AN
 DATUM Geodetic DATE 2016.12.21 - 2016.12.21 CHECKED BY RPR

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT w _P	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)		
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa											
102.4	GROUND SURFACE							20	40	60	80	100							
0.0	ASPHALT: (75mm)																		
0.1																			
	Gravelly SAND , some silt Dense Brown to Greyish Brown Moist (FILL)		1	GS			102												
			1	SS	49		101												
101.0	Clayey SILT , with sand, trace gravel Hard to Very Stiff Reddish Brown Moist (TILL)		2	SS	50		100										2 25 58 15		
1.4																			
			3	SS	35		100												
			4	SS	26		99												
			5	SS	28		98												0 28 55 17
			6	SS	60		96												
			7	SS	56		95										0 28 54 18		
94.2	END OF BOREHOLE AT 8.2m. BOREHOLE OPEN AND DRY UPON COMPLETION. BOREHOLE BACKFILLED WITH AUGER CUTTINGS TO 0.1m, THEN CONCRETE FROM 0.1m TO SURFACE.																		
8.2																			

+³, ×³: Numbers refer to Sensitivity 20 15 10 5 0 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No GS16-02

1 OF 1

METRIC

GWP# 2257-13-00 LOCATION Geneva Street Underpass N 4 779 855.3 E 325 957.8 ORIGINATED BY OA
 HWY 406 BOREHOLE TYPE Solid Stem Augers COMPILED BY AN
 DATUM Geodetic DATE 2016.12.20 - 2016.12.20 CHECKED BY RPR

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT NATURAL MOISTURE CONTENT LIQUID LIMIT			UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			20 40 60 80 100	20 40 60	W _P W W _L	20 40 60			
102.1	GROUND SURFACE													
0.0 0.1	ASPHALT: (75mm)						102							
101.4	Gravelly SAND Grey Moist (FILL)		1	GS						○				
0.7	SAND and GRAVEL , some silt and clay Very Dense Brown Moist (FILL)		1	SS	78		101			○				
			2	SS	65		100			○				35 47 18 (SI+CL)
			3	SS	75					○				
99.2							99			○				13 44 33 10
2.9	Silty SAND , some gravel, trace to some clay Compact Brown Moist (FILL)		4	SS	14		98							
98.3	Clayey SILT , with sand, trace gravel Hard Brown Moist (TILL)									○				
3.8			5	SS	49		97							
			6	SS	60		96			○				4 25 51 20
			7	SS	47		95							
93.9							94			○				
8.2	END OF BOREHOLE AT 8.2m. BOREHOLE OPEN AND DRY UPON COMPLETION. Piezometer installation consists of 19mm diameter Schedule 40 PVC pipe with a 1.52m slotted screen. WATER LEVEL READINGS DATE DEPTH(m) ELEV.(m) 2017.01.04 3.4 98.7													

+³, ×³: Numbers refer to
Sensitivity 20
15 10 5
(%) STRAIN AT FAILURE

RECORD OF BOREHOLE No GS16-03

1 OF 1

METRIC

GWP# 2257-13-00 LOCATION Geneva Street Underpass N 4 779 755.9 E 325 978.8 ORIGINATED BY OA
 HWY 406 BOREHOLE TYPE Solid Stem Augers COMPILED BY AN
 DATUM Geodetic DATE 2016.12.21 - 2016.12.21 CHECKED BY RPR

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT				PLASTIC LIMIT NATURAL MOISTURE CONTENT LIQUID LIMIT			UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa				WATER CONTENT (%)				
102.5	GROUND SURFACE															
101.8	CONCRETE: (25mm)		1	GS												
0.7	Gravelly SAND Brown Moist (FILL)		1	SS	17											
	SAND and GRAVEL, trace to some silt and clay Compact to Dense Brown Moist (FILL)		2	SS	34											
100.3			3	SS	15											
2.2	Silty CLAY, with sand, some gravel, occasional asphalt fragments Very Stiff Greyish Brown Moist (FILL)		4	SS	27											
98.4																
4.1	Clayey SILT, with sand, some gravel Very Stiff to Hard Greyish Brown Moist (TILL)		5	SS	27											
			6	SS	31											
	Trace gravel		7	SS	50/ 0.125											
94.3																
8.2	END OF BOREHOLE AT 8.2m. BOREHOLE OPEN AND DRY UPON COMPLETION. Piezometer installation consists of 19mm diameter Schedule 40 PVC pipe with a 1.52m slotted screen. WATER LEVEL READINGS DATE DEPTH(m) ELEV.(m) 2017.01.04 6.1 96.4															

+ 3, x 3: Numbers refer to
Sensitivity 20
15 5
10 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No GS16-04

1 OF 1

METRIC

GWP# 2257-13-00 LOCATION Geneva Street Underpass N 4 779 745.7 E 325 979.6 ORIGINATED BY OA
 HWY 406 BOREHOLE TYPE Solid Stem Augers COMPILED BY AN
 DATUM Geodetic DATE 2016.12.20 - 2016.12.20 CHECKED BY RPR

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT				UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa					
102.8	GROUND SURFACE												
0.0	ASPHALT: (100mm)												
0.1	Gravelly SAND Brown Moist (FILL)		1	GS									
102.1													
0.7													
101.7	Silty SAND , some gravel, some clay Dense Greyish Brown Moist (FILL)		1	SS	38								
1.1													
	Silty CLAY , some sand, some gravel Very Stiff to Hard Greyish Brown Moist (FILL)		2	SS	21								
			3	SS	55								
	Trace gravel Brown		4	SS	23								
99.0													
3.8	Clayey SILT , with sand, trace gravel Hard Brown Moist (TILL)												
			5	SS	50								
			6	SS	46								
			7	SS	50/ 0.125								
94.6													
8.2	END OF BOREHOLE AT 8.2m. BOREHOLE OPEN AND DRY UPON COMPLETION. BOREHOLE BACKFILLED WITH AUGER CUTTINGS TO 0.1m, THEN CONCRETE FROM 0.1m TO SURFACE.												

ONTMT4S MTO-11336.GPJ 2015TEMPLATE(MTO).GDT 1/12/17

+³, ×³: Numbers refer to
Sensitivity

20
15
10
(%) STRAIN AT FAILURE




Appendix B

Laboratory Test Results

Geneva Street Underpass
GRAIN SIZE DISTRIBUTION

FIGURE B1

SAND and GRAVEL FILL

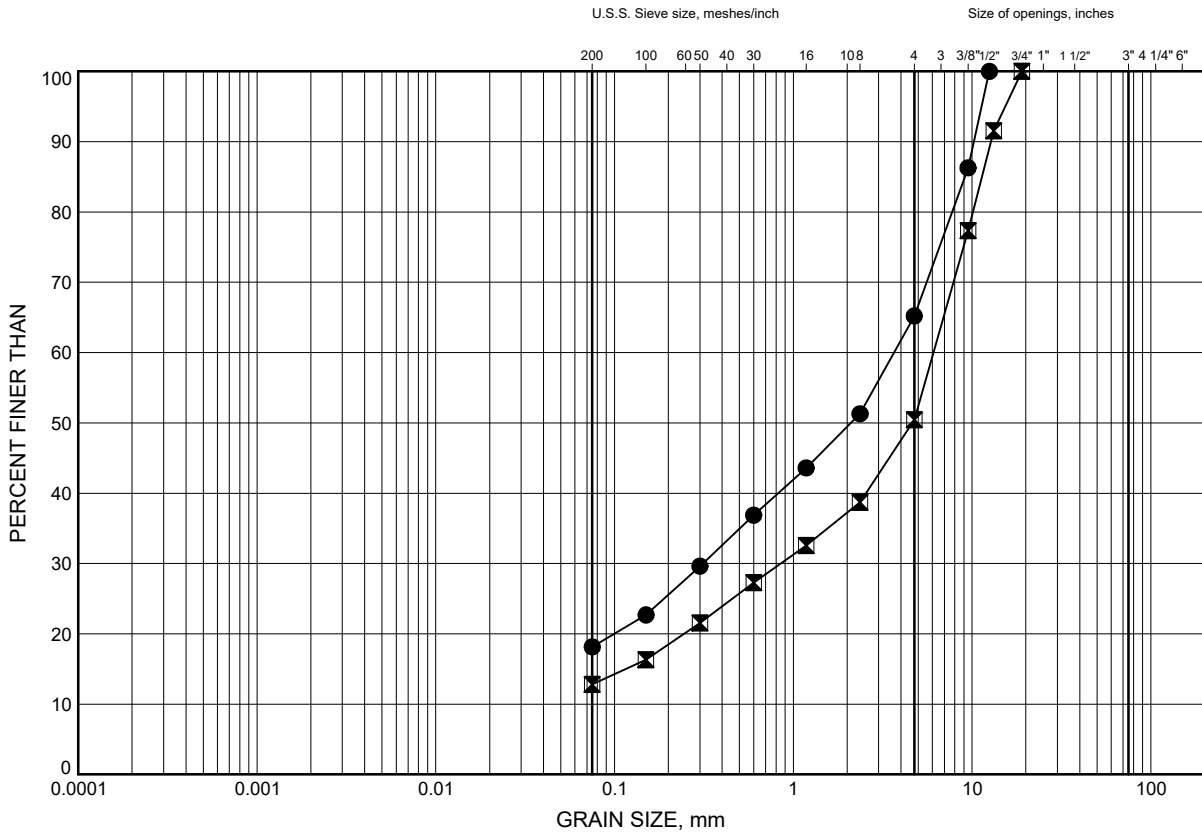

SILT and CLAY	FINE	MEDIUM	COARSE	FINE	COARSE	COBBLE SIZE
FINE GRAINED	SAND			GRAVEL		

LEGEND

SYMBOL	BOREHOLE	DEPTH (m)	ELEV. (m)
●	GS16-02	1.83	100.31
⊠	GS16-03	1.83	100.67

Date January 2017
GWP# 2257-13-00




Prep'd AN
Chkd. RPR

Geneva Street Underpass
GRAIN SIZE DISTRIBUTION

FIGURE B2

Silty SAND FILL

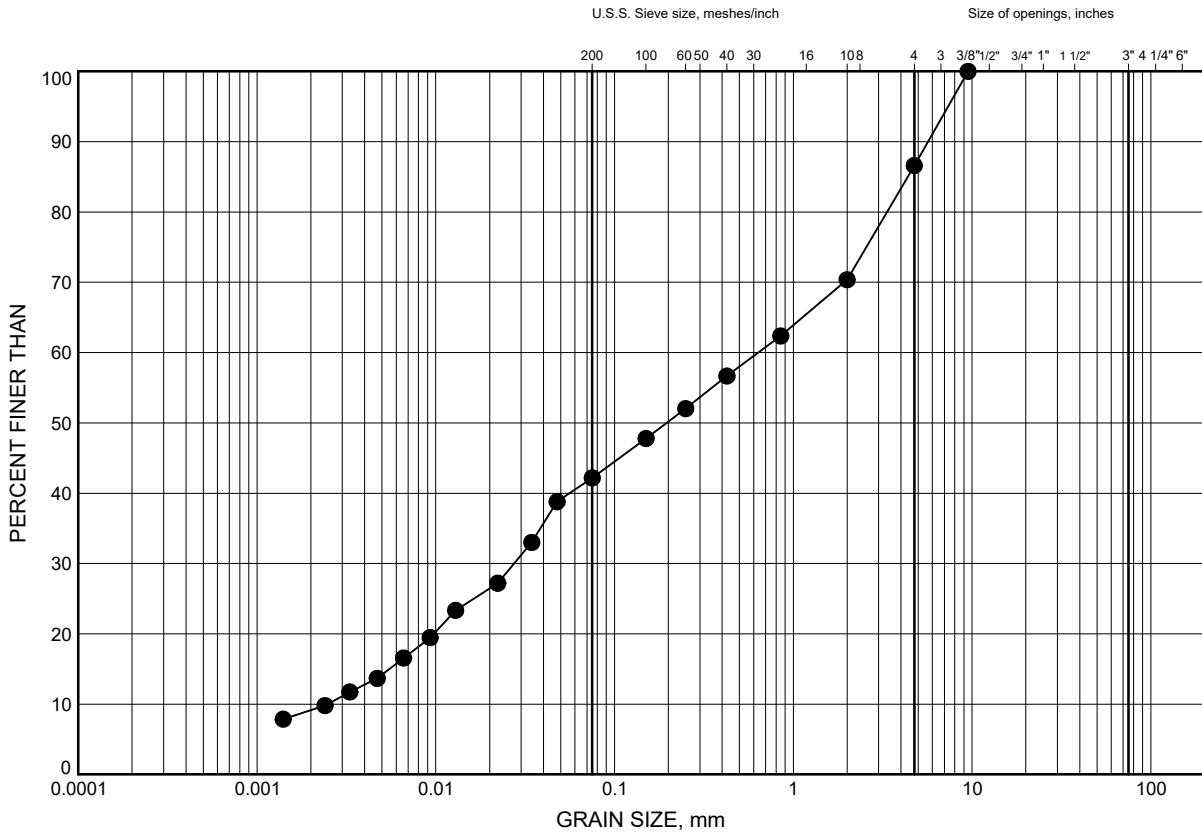

SILT and CLAY	FINE	MEDIUM	COARSE	FINE	COARSE	COBBLE SIZE
FINE GRAINED	SAND			GRAVEL		

LEGEND

SYMBOL	BOREHOLE	DEPTH (m)	ELEV. (m)
●	GS16-02	3.35	98.78

Date January 2017
GWP# 2257-13-00




Prep'd AN
Chkd. RPR

Geneva Street Underpass
GRAIN SIZE DISTRIBUTION

FIGURE B3

Silty CLAY FILL

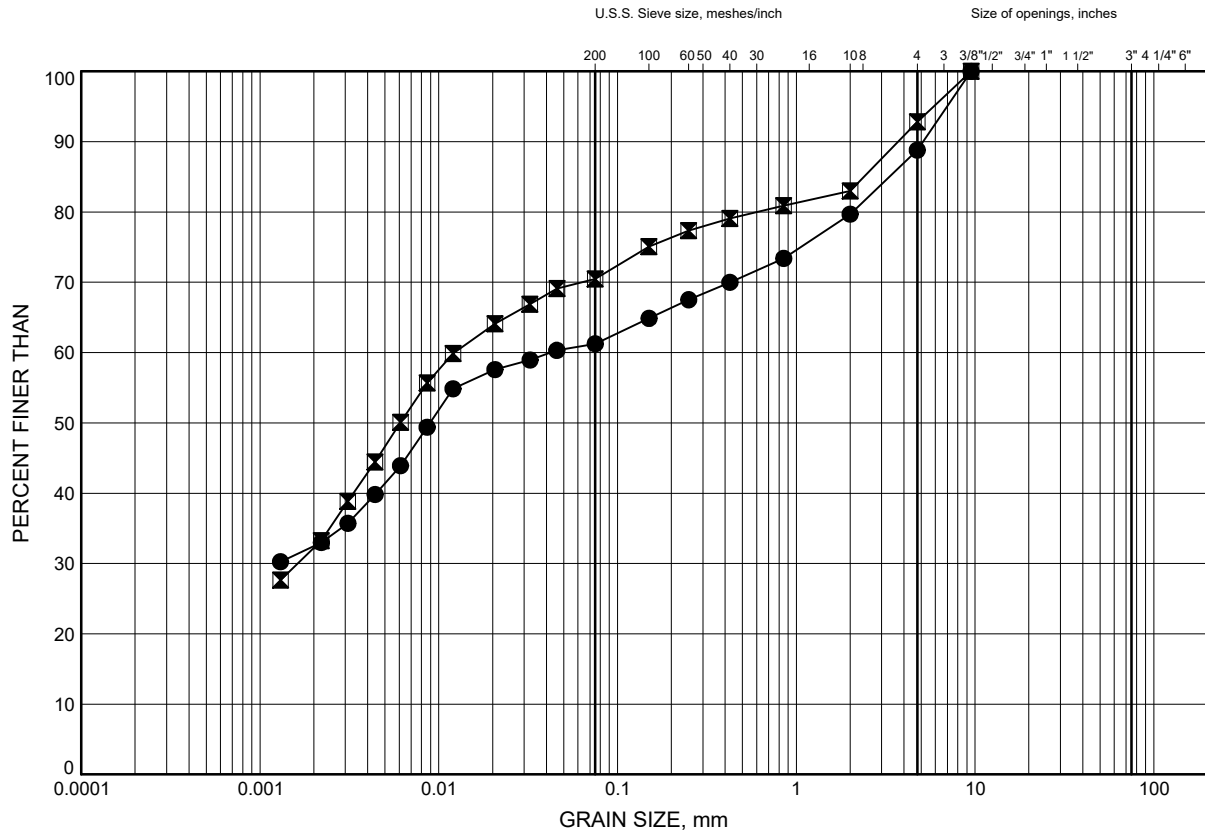

SILT and CLAY	FINE	MEDIUM	COARSE	FINE	COARSE	COBBLE SIZE
FINE GRAINED	SAND			GRAVEL		

LEGEND

SYMBOL	BOREHOLE	DEPTH (m)	ELEV. (m)
●	GS16-03	2.59	99.91
⊠	GS16-04	3.35	99.45

Date January 2017
GWP# 2257-13-00




Prep'd AN
Chkd. RPR

Geneva Street Underpass GRAIN SIZE DISTRIBUTION

FIGURE B4

Clayey SILT TILL, with Sand

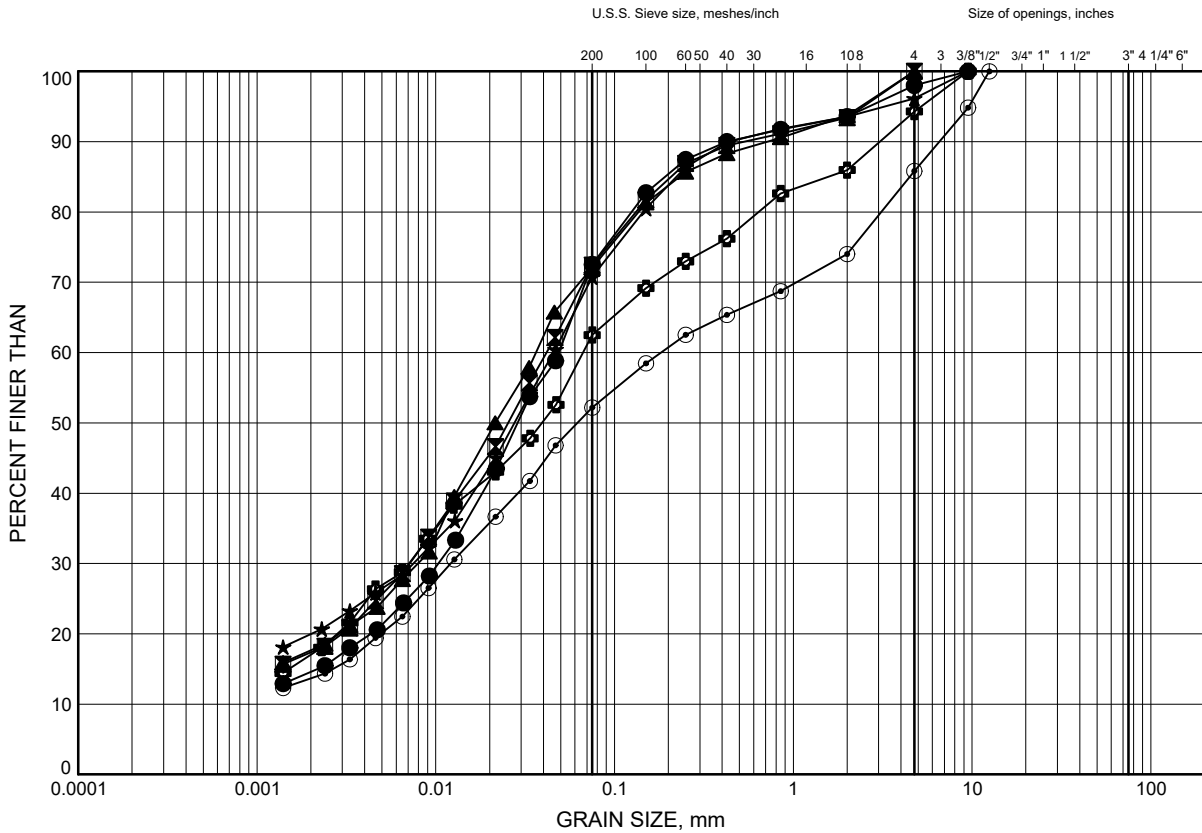

SILT and CLAY	FINE	MEDIUM	COARSE	FINE	COARSE	COBBLE SIZE
FINE GRAINED	SAND			GRAVEL		

LEGEND

SYMBOL	BOREHOLE	DEPTH (m)	ELEV. (m)
●	GS16-01	1.83	100.55
⊠	GS16-01	4.88	97.51
▲	GS16-01	7.92	94.46
★	GS16-02	6.40	95.73
⊙	GS16-03	4.88	97.62
⊕	GS16-03	7.92	94.57

Date January 2017

GWP# 2257-13-00




Prep'd AN

Chkd. RPR

Geneva Street Underpass GRAIN SIZE DISTRIBUTION

FIGURE B5

Clayey SILT TILL, with Sand

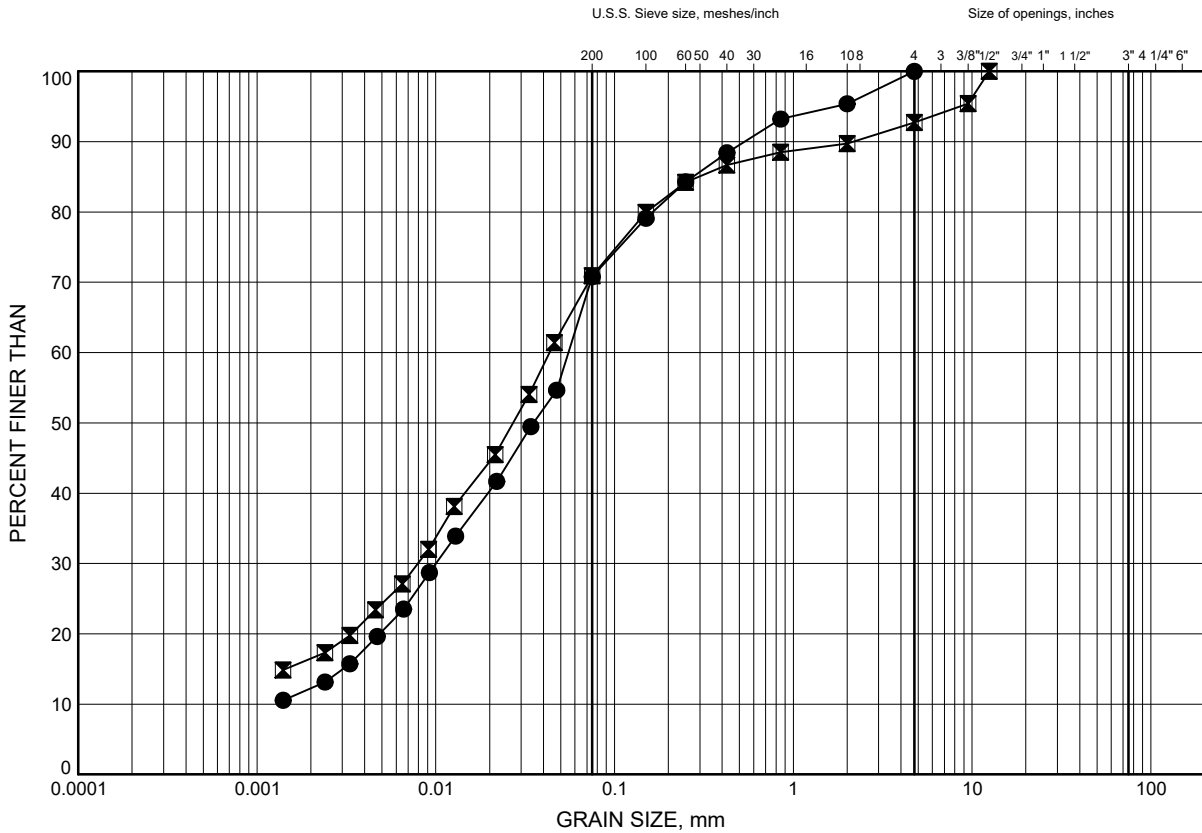

SILT and CLAY	FINE	MEDIUM	COARSE	FINE	COARSE	COBBLE SIZE
FINE GRAINED	SAND			GRAVEL		

LEGEND

SYMBOL	BOREHOLE	DEPTH (m)	ELEV. (m)
●	GS16-04	4.88	97.92
⊠	GS16-04	6.40	96.40

Date January 2017
GWP# 2257-13-00




Prep'd AN
Chkd. RPR

Geneva Street Underpass
ATTERBERG LIMITS TEST RESULTS

FIGURE B6

Clayey SILT TILL, with Sand

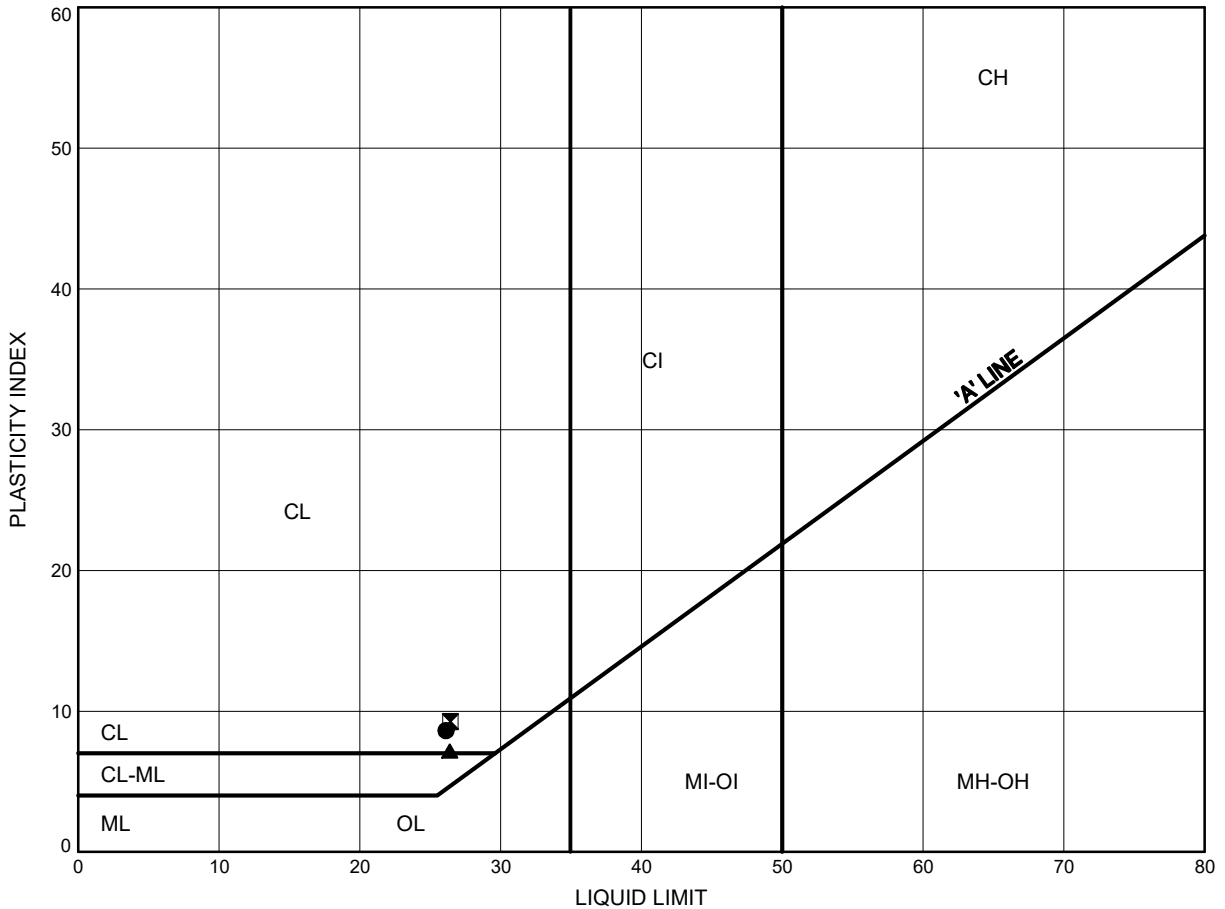

LEGEND

SYMBOL	BOREHOLE	DEPTH (m)	ELEV. (m)
●	GS16-01	4.88	97.51
⊠	GS16-02	6.40	95.73
▲	GS16-04	6.40	96.45

Date January 2017
 GWP# 2257-13-00





Prep'd AN
 Chkd. RPR



Appendix C


Borehole Locations and Soil Strata Drawing

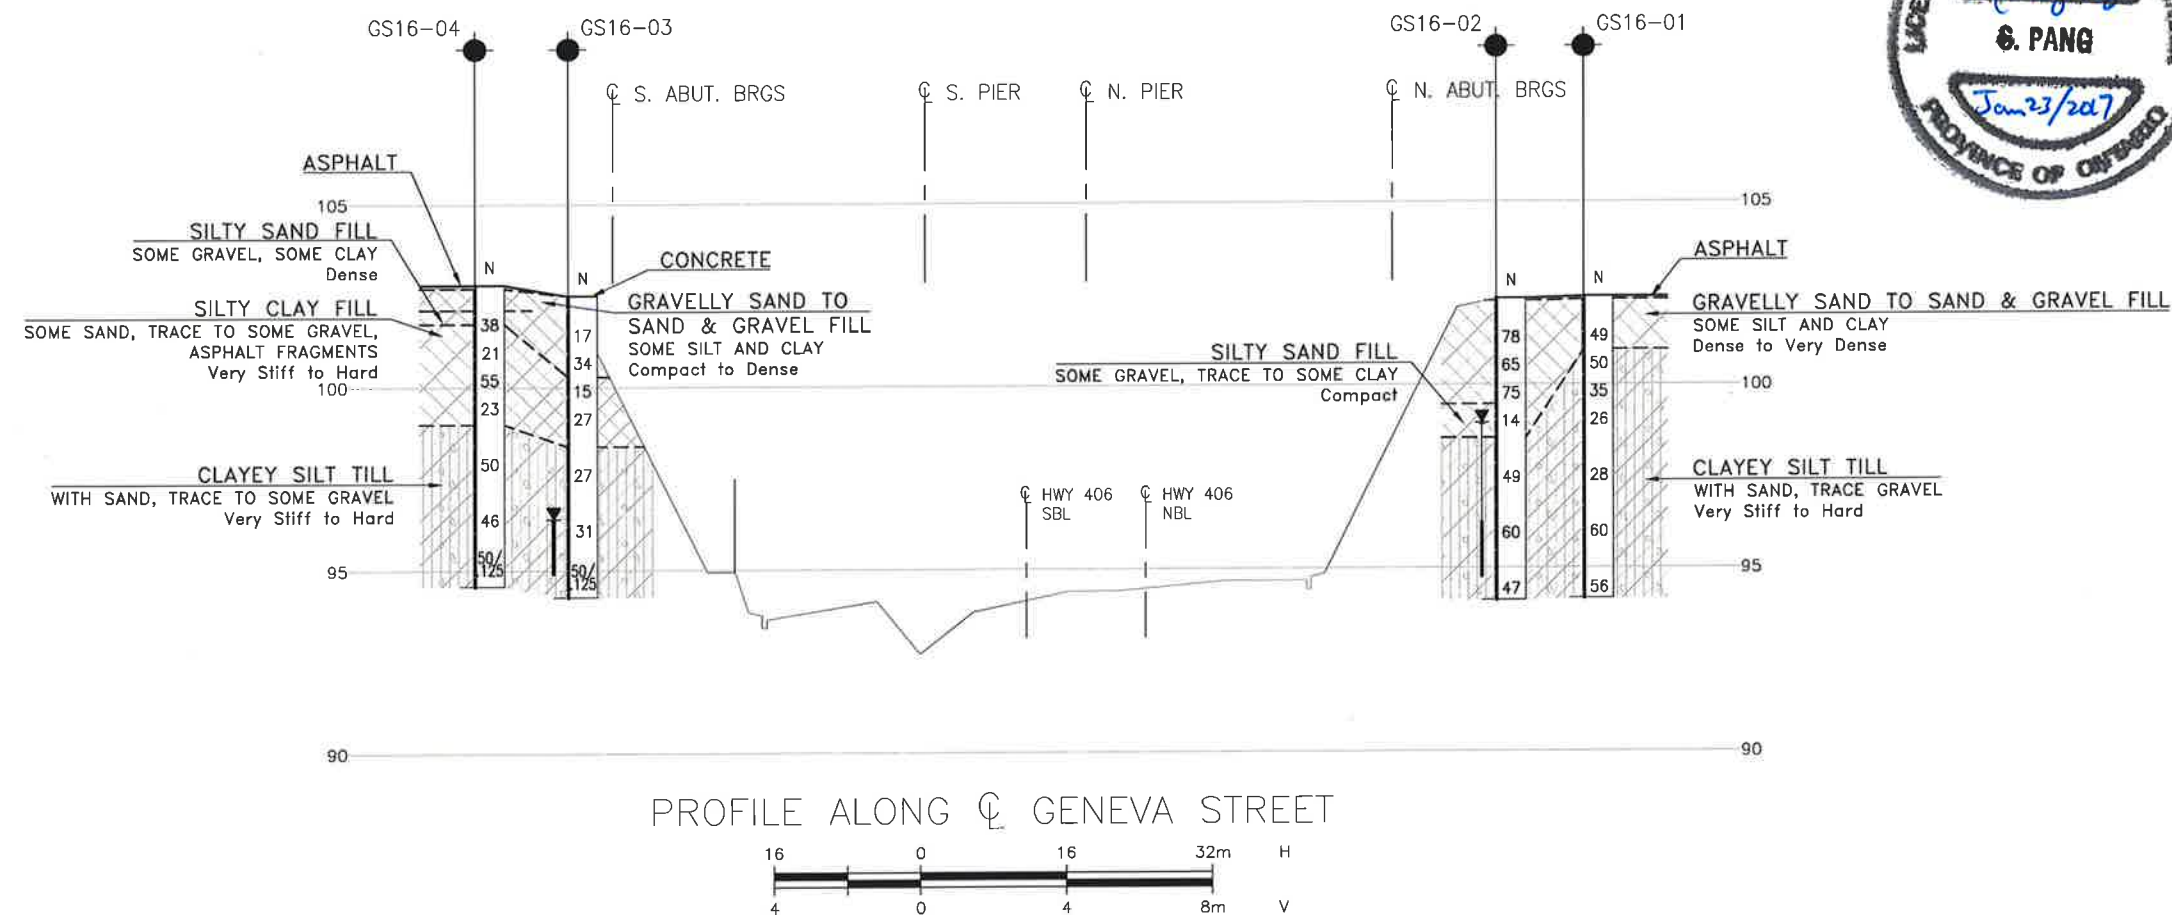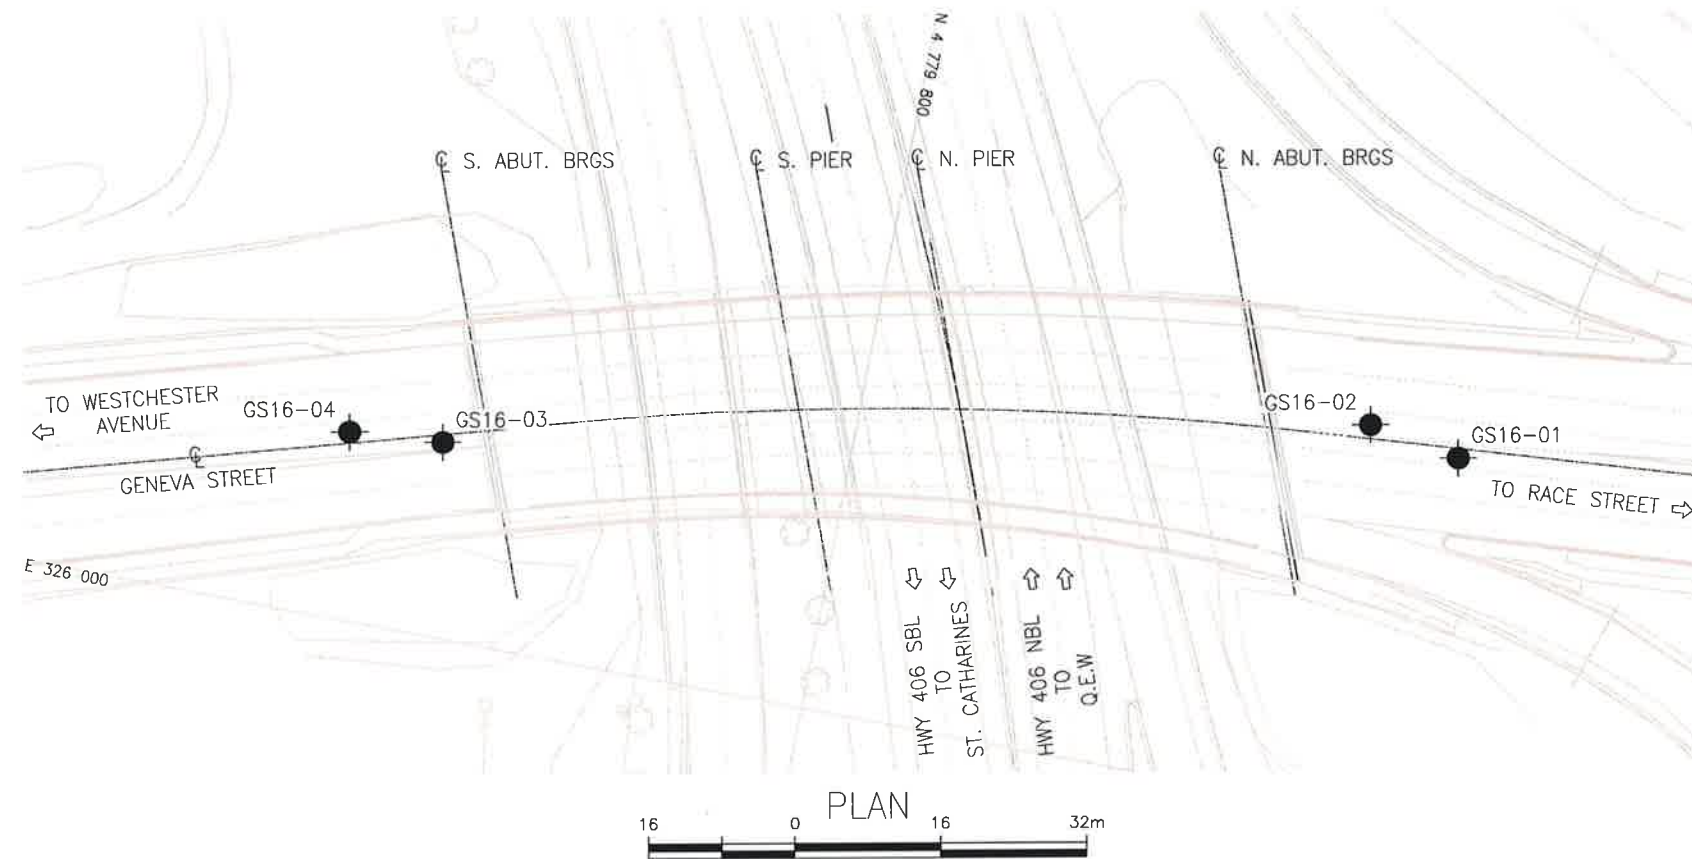

METRIC
DIMENSIONS ARE IN METRES
AND/OR MILLIMETRES
UNLESS OTHERWISE SHOWN



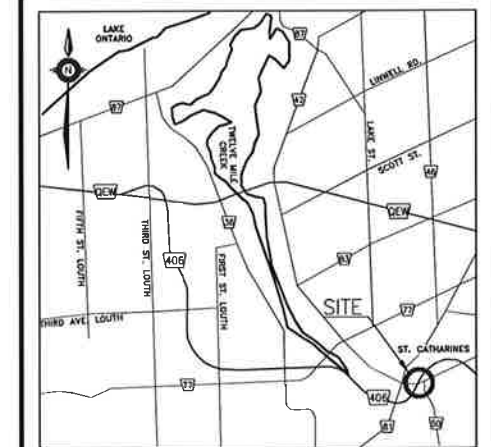


CONT No
WP No 2257-13-00

HIGHWAY 406
GENEVA STREET UNDERPASS
BRIDGE REHABILITATION
BOREHOLE LOCATIONS AND SOIL STRATA



KEYPLAN

LEGEND

- | | |
|---|---------------------------------------|
|  | Borehole |
|  | Borehole and Cone |
| N | Blows /0.3m (Std Pen Test, 475J/blow) |
| CONE | Blows /0.3m (60" Cone, 475J/blow) |
| PH | Pressure, Hydraulic |
|  | Water Level |
|  | Head Artesian Water |
|  | Piezometer |
| 90% | Rock Quality Designation (RQD) |
| A/R | Auger Refusal |

NO	ELEVATION	NORTHING	EASTING
GS16-01	102.4	4 779 865.4	325 959.6
GS16-02	102.1	4 779 855.3	325 957.8
GS16-03	102.5	4 779 755.9	325 978.8
GS16-04	102.8	4 779 745.7	325 979.6

-NOTES-

- 1) The boundaries between soil strata have been established only at Borehole locations. Between Boreholes the boundaries are assumed from geological evidence.
- 2) This drawing is for subsurface information only. Surface details and features are for conceptual illustration.

GEOCRES No. 30M3-293

[illegible]



Appendix D

Selected Site Photographs



Photo 1. - East Side of Geneva Street underpass at Highway 406



Photo 2.- Southeast quadrant of Geneva Street underpass at Highway 406



Photo 3.- Northeast quadrant of Geneva Street underpass at Highway 406



Photo 4. - Northwest quadrant of Geneva Street underpass at Highway 406



Photo 5.- Southwest quadrant of Geneva Street underpass at Highway 406