



THURBER ENGINEERING LTD.

**FOUNDATION INVESTIGATION REPORT
HIGH FILL EMBANKMENTS AND DEEP CUTS
REGIONAL ROAD 17 (EBYCREST ROAD) TO WOOLWICH GUELPH TOWNLINE
NEW HIGHWAY 7, KITCHENER TO GUELPH
G.W.P. 408-88-00**

GEOCRES No. 40P09-067

Latitude 43.501340 °, Longitude -80.390876 °

Report

to

WSP

Date: March 7, 2024
File: 11375



TABLE OF CONTENTS

PART 1: FACTUAL INFORMATION

1	INTRODUCTION	1
2	SITE DESCRIPTION	1
3	SITE INVESTIGATIONS AND FIELD TESTING	2
4	LABORATORY TESTING.....	2
5	DESCRIPTION OF SUBSURFACE CONDITIONS	2
5.1	Highway 7: Station 25+050 – 25+600 (08-120, 08-121, ML16 25+140, ML16 25+250, ML16 25+300, ML16 25+350, ML16 25+400, SP16-04, ML16 25+550) – Appendix A	3
5.1.1	Topsoil.....	3
5.1.2	Sand to Silty Sand.....	3
5.1.3	Silt to Sandy Silt	4
5.1.4	Silty Clay	4
5.1.5	Silty Clay Till.....	5
5.1.6	Silty Sand to Sandy Silt Till.....	6
5.1.7	Groundwater Conditions.....	6
5.2	Highway 7: Station 26+450 – 26+950 (08-134, 08-135, 08-136, 08-138, ML16 26+525, ML16 26+625, ML16 26+800, ML16 26+850, ML16 26+900) – Appendix B.....	7
5.2.1	Topsoil.....	7
5.2.2	Fill.....	7
5.2.3	Sand and Gravel to Gravelly Sand.....	7
5.2.4	Sand	8
5.2.5	Silty Clay Till.....	9
5.2.6	Sand and Gravel	9
5.2.7	Silty Sand to Sandy Silt Till.....	10
5.2.8	Groundwater Conditions.....	11
5.3	Highway 7: Station 27+350 – 27+900 (08-149, 08-150, 08-151, ML16 27+675) – Appendix C	11
5.3.1	Topsoil/Peat	11
5.3.2	Sand to Silty Sand.....	11

5.3.3	Sandy Silt	12
5.3.4	Sand and Gravel to Gravelly Sand	13
5.3.5	Silty Clay to Clayey Silt	13
5.3.6	Sandy Silt Till.....	14
5.3.7	Groundwater Conditions.....	15
5.4	Regional Road 30 (Shantz Station Road) – S-W Ramp: Station 28+400 – 28+500 (08-156, 08-158, SH16-02) – Appendix D	15
5.4.1	Fill	15
5.4.2	Clayey Silt	15
5.4.3	Sand	15
5.4.4	Silty Clay to Clayey Silt Till.....	16
5.4.5	Silty Sand to Sandy Silt Till.....	17
5.4.6	Bedrock	18
5.4.7	Groundwater Conditions.....	18
5.5	Highway 7: Station 29+950 – 30+150 (08-171, ML16 29+950, ML16 30+000, ML16 30+150) – Appendix E	19
5.5.1	Topsoil.....	19
5.5.2	Silty Sand	19
5.5.3	Sandy Silt Till.....	19
5.5.4	Groundwater Conditions.....	20
5.6	Regional Road 30 (Shantz Station Road) – N/S-E Ramp: Station 28+420 – 28+600 (08-159) – Appendix F	20
5.6.1	Topsoil.....	20
5.6.2	Fill	20
5.6.3	Silty Clay Till.....	20
5.6.4	Silty Sand to Sandy Silt Till.....	21
5.6.5	Groundwater Conditions.....	21
5.7	Regional Road 30 (Shantz Station Road) – E-N/S Ramp: Station 28+625 – 28+675 (08-153) – Appendix G.....	22
5.7.1	Fill	22
5.7.2	Silty Clay Till.....	22
5.7.3	Groundwater Conditions.....	23



5.8	Regional Road 30 (Shantz Station Road): Station 8+850 – 9+825 (08-152, SH16 09+880) – Appendix H	23
5.8.1	Topsoil	23
5.8.2	Fill	23
5.8.3	Sand	23
5.8.4	Sandy Silt to Silt Till	23
5.8.5	Groundwater Conditions	24
5.9	Highway 7: Station 29+200 – 29+400 (ML16 29+200, ML16 29+250, ML16 29+300, ML16 29+350, ML16 29+400) – Appendix I	24
5.9.1	Topsoil	24
5.9.2	Clayey Silt to Silty Clay Till	24
5.9.3	Silty Clay to Clay	25
5.9.4	Groundwater Conditions	26
6	MISCELLANEOUS	26

Statement of Limitations and Conditions

Drawings 1 to 3 – Site Location Plans

Symbols, Abbreviations and Terms of Use on Records of Boreholes

Explanation of Rock Logging Terms

APPENDICES

APPENDIX A. HIGHWAY 7: STATION 25+050 – 25+600 (08-120, 08-121, ML16 25+140, ML16 25+250, ML16 25+300, ML16 25+350, ML16 25+400, SP16-04, ML16 25+550)

APPENDIX B. HIGHWAY 7: STATION 26+450 – 26+950 (08-134, 08-135, 08-136, 08-138, ML16 26+525, ML16 26+625, ML16 26+800, ML16 26+850, ML16 26+900)

APPENDIX C. HIGHWAY 7: STATION 27+350 – 27+900 (08-149, 08-150, 08-151, ML16 27+675)

APPENDIX D. REGIONAL ROAD 30 (SHANTZ STATION ROAD) S-W RAMP: STATION 28+400 – 28+500 (08-156, 08-158, SH16-02)

APPENDIX E. HIGHWAY 7: STATION 29+950 – 30+150 (08-171, ML16 29+950, ML16 30+000, ML16 30+150)

APPENDIX F. REGIONAL ROAD 30 (SHANTZ STATION ROAD) – N/S-E RAMP: STATION 28+420 – 28+600 (08-159)

APPENDIX G. REGIONAL ROAD 30 (SHANTZ STATION ROAD) – E-N/S RAMP: STATION 28+625 – 28+675 (08-153)



APPENDIX H. REGIONAL ROAD 30 (SHANTZ STATION ROAD): STATION 8+850 – 9+925
(08-152, SH16 09+880)

APPENDIX I. HIGHWAY 7: STATION 29+200 – 29+400 (ML16 29+200, ML16 29+250,
ML16 29+300, ML16 29+350, ML16 29+400)

Appendices A through I include:

- Record of Borehole Sheets
- Results of Laboratory Test
- Borehole Locations and Soil Strata Drawing(s)



**FOUNDATION INVESTIGATION REPORT
HIGH FILL EMBANKMENTS AND DEEP CUTS
REGIONAL ROAD 17 (EBYCREST ROAD) TO WOOLWICH GUELPH TOWNLINE
NEW HIGHWAY 7, KITCHENER TO GUELPH
G.W.P. 408-88-00**

GEOCRES No. 40P09-067

PART 1: FACTUAL INFORMATION

1 INTRODUCTION

This section of the report presents the factual findings obtained from a foundation investigation completed for proposed high fill embankments of 4.5 m or greater in height and deep cuts from just east of Regional Road 17 (Ebycrest Road) to just east of Woolwich Guelph Townline in the Kitchener-Waterloo area as part of the new Highway 7 project. Thurber Engineering Limited (Thurber) carried out the current field investigation as a sub-consultant to WSP under Assignment No. 3014-E-0013.

The purpose of this investigation was to explore and supplement the previous investigation at the site and based on the data obtained, to prepare a borehole location plan, records of boreholes, stratigraphic profiles, laboratory test results, and a written description of the subsurface conditions.

Reference has been made to the following foundation report that was prepared by Thurber during the first phase of the investigation:

- Preliminary Foundation Investigation and Design Report, High Fills and Deep Cuts, From East of Regional Road 17 to East of Townline Road, Highway 7 New, Kitchener to Guelph, G.W.P. 408-88-00, GEOCRES No. 40P8-171, Report to Ministry of Transportation Ontario Southwestern Region, File 15-64-17, dated September 1, 2009

It is a condition of this report that Thurber's performance of its professional services is subject to the attached Statement of Limitations and Conditions.

2 SITE DESCRIPTION

The proposed new Highway 7 alignment is to the north of the existing Highway 7 alignment and traverses in an east-west direction. The length this section of new Highway 7 is about 5.1 km and is just east of Regional Road 17 (Ebycrest Road) to just west of Woolwich Guelph Townline.

The area surrounding this section of new Highway 7 primarily consists of agricultural and undeveloped lands.



In general, the ground surface along the proposed new Highway 7 alignment is rising gently from west to east.

3 SITE INVESTIGATIONS AND FIELD TESTING

The foundation investigation was carried out in two phases: the first phase, consisting of 15 boreholes, was carried out between May 2008 and February 2009 while the second phase, consisting of 23 boreholes, was conducted between April 2017 and July 2018. The investigation was completed using track mounted drill rigs. Prior to commencement of drilling, utility clearances were obtained in the vicinity of the borehole locations.

Soil samples were obtained at selected intervals using a split spoon sampler in conjunction with Standard Penetration Testing (SPT) in accordance with ASTM D 1586. The boreholes were advanced to sampled depths ranging from 4.6 m to 21.4 m and 5.2 m to 25.0 m, respectively. Where encountered, 3 m of bedrock was cored.

Borehole drilling and sampling operations were supervised on a full-time basis by a member of Thurber's technical staff, who logged the boreholes and processed the recovered soil samples for transport to the laboratory for further examination and testing.

Piezometers of various diameters (19 mm and 25 mm) and slotted screen lengths (1.5 m and 3.0 m) were installed in selected boreholes to allow for measurements of the groundwater level. The piezometer installations are shown on the respective Record of Borehole sheets, provided in Appendix A through Appendix I.

Following completion of the field investigation, all boreholes and standpipe piezometers were decommissioned in general accordance with O. Reg. 903 (as amended).

The locations of the investigated high fill and deep cut areas are shown on Drawings 1 through 3 following the text of the report, while the approximate borehole locations are shown on the respective Borehole Locations and Soil Strata Drawings included in Appendix A through Appendix I. The coordinates and elevation of the boreholes are provided on these drawings and on the individual Record of Borehole sheets included in Appendix A through Appendix I. The borehole elevations and coordinates were provided by WSP.

4 LABORATORY TESTING

All recovered soil samples were subjected to further visual identification and to natural moisture content determination. Selected samples were also subjected to Atterberg Limit testing and grain size analysis. The results of these tests are summarized on the Record of Borehole sheets and shown on laboratory figures included in Appendix A through Appendix I.

5 DESCRIPTION OF SUBSURFACE CONDITIONS

Details of the encountered soil stratigraphy are presented on the Record of Borehole sheets and the Borehole Location and Soil Strata drawings included in Appendix A through Appendix I.



Summaries of the stratigraphy, based on the conditions encountered in the boreholes, is provided in the following section; however, the factual data presented on the Record of Borehole sheets takes precedence over this general description for interpretation of the site conditions.

The results of the in-situ tests (i.e., SPT) as presented in the record of borehole sheets are in the sections below are uncorrected. The boundaries between the soil deposits on the record of boreholes have been inferred from non-continuous sampling, and therefore, these boundaries represent transitions between soil types rather than exact planes of geological change. It must be recognized that the variation of stratigraphic boundaries will vary between and beyond borehole locations.

5.1 Highway 7: Station 25+050 – 25+600 (08-120, 08-121, ML16 25+140, ML16 25+250, ML16 25+300, ML16 25+350, ML16 25+400, SP16-04, ML16 25+550) – Appendix A

5.1.1 Topsoil

Topsoil ranging in thickness from 50 mm to 500 mm was encountered at ground surface in all the boreholes at this location.

5.1.2 Sand to Silty Sand

A native deposit of sand to silty sand was encountered directly below the topsoil in Boreholes 08-120, ML16 25+300 and ML16 25+550 and below the silty clay layer in Borehole ML16 25+250. The sand was 1.0 m to 2.9 m thick with an underside depth of 1.4 m to 3.4 m (Elevation 328.0 m to 322.1 m) in Boreholes 08-120, ML16 25+300 and ML16 25+550. Borehole ML16 25+250 was terminated within the sand deposit at a depth of 11.3 m below the ground surface (Elevation 318.0 m).

SPT N-Values in the sand to silty sand ranged from 4 blows to greater than 50 blows indicating a loose to very dense relative density. The higher N-values may be due to the presence of cobbles.

Recorded moisture contents ranged from 4 percent to 18 percent. The gradation analyses completed on three samples of the sand to silty sand are illustrated on Figure A1 and A2 of Appendix A. The results of the tests are summarized below and are presented on the corresponding Record of Borehole sheets in Appendix A.

Soil Particle	Percentage (%) Silty Sand	Percentage (%) Sand
Gravel	11	0
Sand	55	81 to 92
Silt	31	8 to 19
Clay	3	



5.1.3 Silt to Sandy Silt

Sandy silt was encountered below the topsoil in Boreholes ML16 25+140, ML16 25+350, ML16 25+400, SP16-04 and 08-121. The sandy silt had a thickness of 0.6 m to 7.0 m with an underside depth of 0.7 m to 7.0 m (Elevation 328.5 m to 324.9 m) in Boreholes ML16 25+140, ML16 25+350, ML16 25+400, SP16-04 and 08-121.

A lower silt layer was also encountered below the silty clay in Borehole ML16 25+400. Borehole ML16 25+400 was terminated within the lower silt deposit at a depth of 9.8 m below the ground surface (Elevation 317.5 m).

SPT N-Values in the silt to sandy silt ranged from 4 blows to 39 blows indicating a loose to dense relative density.

Recorded moisture contents ranged from 7 percent to 26 percent. The gradation analyses completed on selected samples of the silt to sandy silt are illustrated on Figure A3 of Appendix A. The results of the tests are summarized below and are presented on the corresponding Record of Borehole sheets in Appendix A.

Soil Particle	Percentage (%)
Gravel	0 to 4
Sand	3 to 41
Silt	45 to 90
Clay	4 to 18

5.1.4 Silty Clay

A deposit of silty clay was encountered below the sand or silt layers in Boreholes ML16 25+300, ML16 25+350, ML16 25+400 to, ML16 25+550, and SP16-04, and below the silty sand to sandy silt till in Borehole ML16 25+250. The silty clay varied in thickness from 1.5 m to 7.5 m with an underside depth of 5.6 m to 9.1 m (Elevation 321.9 m to 318.2 m).

SPT N-Values in the silty clay ranged from 6 blows to greater than 50 blows indicating a firm to hard consistency.

The recorded moisture contents ranged from 9 percent to 28 percent. Atterberg limits testing was completed on selected samples of the silty clay deposit. The results are summarized on the Record of Borehole sheets in Appendix A and illustrated on Figure A4 in Appendix A. The laboratory results indicate the deposit is a silty clay of low to intermediate plasticity (CL to CI).

Parameter	Value
Liquid Limit	30 to 49
Plastic Limit	14 to 19
Plasticity Index	17 to 29

The gradation analyses completed on selected samples of the silty clay are illustrated on Figure A5 of Appendix A. The results of the tests are summarized below and are presented on the corresponding Record of Borehole sheets in Appendix A.

Soil Particle	Percentage (%)
Gravel	0
Sand	0 to 14
Silt	36 to 46
Clay	44 to 64

5.1.5 Silty Clay Till

Silty clay till was encountered below the sand or silt layers in Boreholes 08-120 and ML 16 25+140. The silty clay till varied in thickness from 1.7 m to 3.3 m with an underside depth of 6.3 m to 8.7 m (Elevation 324.7 m to 323.2 m). It should be noted that glacial tills are known to contain cobbles and boulders.

SPT N-Values in the silty clay till ranged from 18 blows to 38 blows indicating a very stiff to hard consistency.

The recorded moisture contents ranged from 14 percent to 18 percent. Atterberg limits testing was completed on two samples of the silty clay till deposit. The results are summarized on the Record of Borehole sheets in Appendix A and illustrated on Figure A6 in Appendix A. The laboratory results indicate the till is a silty clay of low plasticity (CL).

Parameter	Value
Liquid Limit	23 to 28
Plastic Limit	12 to 15
Plasticity Index	11 to 15

The gradation analyses completed on two samples of the silty clay till are illustrated on Figure A7 of Appendix A. The results of the tests are summarized below and are presented on the corresponding Record of Borehole sheets in Appendix A.

Soil Particle	Percentage (%)
Gravel	0 to 4
Sand	18 to 20
Silt	50 to 53
Clay	26 to 29

5.1.6 Silty Sand to Sandy Silt Till

A deposit of silty sand to sandy silt till was encountered in all the boreholes at this location except for Borehole ML16 25+400. The silty sand to sandy silt till was encountered below the silty clay till in 08-120 and ML16 25+140, the sandy silt in 08-121, the topsoil in ML16 25+250, the silty clay in ML16 25+300, ML 25+350, ML16 25+550, and SP16-04. The sandy silt till had a thickness of 6.8 m with an underside depth of 7.2 m (Elevation 322.1 m) in Borehole ML16 25+250. Boreholes 08-120, 08-121, ML16 25+140, ML16 25+300, ML16 25+350, SP16-04, ML16 25+550 were terminated within the sandy silt to silty sand till deposit at a depth of 8.1 m to 18.9 m below the ground surface (Elevation 308.1 m to 321.9 m).

It should be noted that glacial tills are known to contain cobbles and boulders.

SPT N-Values in the silty sand to sandy silt till ranged from 10 blows to greater than 50 blows indicating a compact to very dense relative density.

Recorded moisture contents in the silty sand to sandy silt till deposit ranged from 4 percent to 28 percent. The gradation analyses completed on selected samples of the silty sand to sandy silt till are illustrated on Figures A8 and A9 of Appendix A. The results of the tests are summarized below and are presented on the corresponding Record of Borehole sheets in Appendix A.

Soil Particle	Percentage (%)
Gravel	0 to 8
Sand	23 to 68
Silt	30 to 73
Clay	2 to 16

5.1.7 Groundwater Conditions

Piezometers were installed in Boreholes 08-120, ML16 25+250, and SP16-04 to monitor groundwater levels after completion of drilling. The measured groundwater levels are summarized in the table below.



Borehole	Date	Depth (m)	Elevation (m)
08-120	February 19, 2009	2.9	328.1
ML16 25+250	April 30, 2018	5.6	323.7
SP16-04	June 13, 2017	5.4	321.6
	April 30, 2018	5.0	322.0

It should be noted that seasonal fluctuations of the groundwater level are to be expected. In particular, the groundwater level may be at a higher elevation after periods of significant and/or prolonged precipitation and spring snow melts.

5.2 Highway 7: Station 26+450 – 26+950 (08-134, 08-135, 08-136, 08-138, ML16 26+525, ML16 26+625, ML16 26+800, ML16 26+850, ML16 26+900) – Appendix B

5.2.1 Topsoil

Topsoil ranging in thickness from 75 mm to 900 mm was encountered at ground surface in Boreholes ML16 26+525, ML16 26+625, ML16 26+800, ML16 26+850, and ML16 26+900. Recorded moisture contents ranged from 17 percent to 31 percent.

5.2.2 Fill

Fill was encountered at ground surface in Borehole 08-138. The fill consisted of sand and gravel and sandy silt. The fill has a thickness of 1.4 m with an underside depth of 1.4 m (Elevation 331.0 m).

A SPT N-Value recorded in the sandy silt fill was 10 blows indicating a compact relative density.

Recorded moisture contents of the sand and gravel and sandy silt was 3 percent and 20 percent, respectively. The gradation analysis completed on the sample of the sand and gravel fill is illustrated on Figure B1 of Appendix B. The results of the tests are summarized below and are presented on the corresponding Record of Borehole sheets in Appendix B.

Soil Particle	Percentage (%)
Gravel	37
Sand	50
Silt	13
Clay	

5.2.3 Sand and Gravel to Gravelly Sand

Sand and gravel, some silt to gravelly sand was encountered below the topsoil in Boreholes ML16 26+850 and ML16 26+900. Cobbles were observed within the fill in Borehole



ML16 26+900. The sand fill varied in thickness from 2.5 m to 4.9 m with an underside depth of 3.0 m to 5.5 m (Elevation 327.5 m to 326.1 m).

SPT N-Values recorded in the granular layer ranged from 25 blows to greater than 100 blows indicating a compact to very dense relative density.

Recorded moisture contents ranged from 2 percent to 5 percent. The gradation analyses completed on two samples of the sand and gravel to gravelly sand are illustrated on Figure B2 of Appendix B. The results of the tests are summarized below and are presented on the corresponding Record of Borehole sheets in Appendix B.

Soil Particle	Percentage (%)
Gravel	37 to 38
Sand	42 to 50
Silt	13 to 20
Clay	

5.2.4 Sand

A deposit of sand was encountered at ground surface in Boreholes 08-134, 08-135 and 08-136 and below the topsoil in Borehole ML16 26+800. The sand deposit ranged from 0.6 m to 1.7 m thick with an underside depth ranging from 0.6 m to 2.6 m (Elevation 330.2 m to 326.5 m). Occasional cobbles were noted in this deposit in Borehole 08-135. Trace to occasional rootlets were also noted.

SPT N-Values in the sand to sand and silt ranged from 2 blows to 42 blows indicating very loose to dense relative density.

Recorded moisture contents ranged from 10 percent to 19 percent. The gradation analyses completed on one sample of the sand is illustrated on Figure B3 of Appendix B. The results of the tests are summarized below and are presented on the corresponding Record of Borehole sheets in Appendix B.

Soil Particle	Percentage (%)
Gravel	17
Sand	71
Silt	10
Clay	2

5.2.5 Silty Clay Till

Silty clay till was encountered below the fill in Borehole ML16 26+850, below the sand in Boreholes 08-134 and ML16 26+800, and below or within the silty sand to sandy silt till in Boreholes ML16 26+525, 08-136 and ML16 26+625. The silty clay till had a thickness of 1.4 m to 4.7 m with an underside depth of 5.5 m to 10.2 m (Elevation 324.8 m to 322.4 m) in Boreholes 08-134, ML16 26+525, ML16 26+625, ML16 26+800, and ML16 26+850. Borehole 08-136 was terminated within the till deposit at a depth of 8.1 m below the ground surface (Elevation 322.5 m).

It should be noted that glacial tills are known to contain cobbles and boulders.

SPT N-Values in the silty clay till ranged from 25 blows to greater than 100 blows indicating a very stiff to hard consistency.

The recorded moisture contents ranged from 2 percent to 19 percent. Atterberg limit testing was completed on selected samples of the silty clay till deposit. The results are summarized on the Record of Borehole sheets in Appendix B and illustrated on Figure B4 in Appendix B. The laboratory results typically indicate the till is a silty clay of low plasticity (CL).

Parameter	Value
Liquid Limit	17 to 30
Plastic Limit	10 to 15
Plasticity Index	7 to 15

The gradation analyses completed on selected samples of the silty clay till are illustrated on Figure B5 of Appendix B. The results of the tests are summarized below and are presented on the corresponding Record of Borehole sheets in Appendix B.

Soil Particle	Percentage (%)
Gravel	0 to 9
Sand	7 to 39
Silt	35 to 60
Clay	21 to 38

5.2.6 Sand and Gravel

A 3.2 m thick layer of sand and gravel was encountered below the silty clay till in Borehole ML16 26+525 at a depth of 7.0 m below the ground surface (Elevation 323.2 m).

SPT N-Values in the sand and gravel ranged from 46 blows per 0.3 m penetration to 48 blows per 0.075 mm penetration indicating a dense to very dense relative density.



Recorded moisture contents were 9 percent. The gradation analysis completed on one sample of the sand and gravel is illustrated on Figure B6 of Appendix B. The results of the test are summarized below and are presented on the corresponding Record of Borehole sheet in Appendix B.

Soil Particle	Percentage (%)
Gravel	37
Sand	50
Silt	13
Clay	

5.2.7 Silty Sand to Sandy Silt Till

Silty sand to sandy silt till was encountered in all boreholes at this location. The silty sand to sandy silt till had a thickness of 6.4 m with an underside depth of 7.0 m (Elevation 323.5 m) in Borehole 08-136. Boreholes 08-134, ML16 26+525, 08-135, ML16 26+625, 08-138, ML16 26+800, ML16 26+850, and ML16 26+900 were terminated within the till deposit at a depth ranging from 8.0 m to 15.6 m below the ground surface (Elevation 323.6 m to 317.3 m).

Layers of clayey silt and silty clay were encountered within the sandy silt till in Boreholes 08-134 to 08-138 at depths ranging from 6.5 m to 9.0 m (Elevation 326.0 m to 318.5 m). A silt layer was also encountered within the sandy silt till in Borehole 08-136 at a depth of 4.8 m (Elevation 325.7 m). Occasional cobbles were also noted in this deposit. It should be noted that glacial tills are known to contain cobbles and boulders.

SPT N-Values in the silty sand to sandy silt till ranged from 7 blows to greater than 100 blows indicating a loose to very dense relative density.

The recorded moisture contents ranged from 3 percent to 19 percent. Atterberg limit testing was completed on five samples of the clayey silt to silty clay layers within the sandy silt till. The results are summarized on the Record of Borehole sheets in Appendix B and illustrated on Figure B7 in Appendix B. The laboratory results indicate the layers within sandy silt till are silty clay of low plasticity (CL-ML).

Parameter	Value
Liquid Limit	17 to 21
Plastic Limit	11 to 11
Plasticity Index	6 to 10

The gradation analyses completed on selected samples of the silty sand to sandy silt till and one sample of the silt layer within the till deposit are illustrated on Figures B8 through B10 of Appendix



B. The results of the tests are summarized below and are presented on the corresponding Record of Borehole sheets in Appendix B.

Soil Particle	Percentage (%) Silty Sand to Sandy Silt Till	Percentage (%) Silt Layer
Gravel	0 to 7	5
Sand	20 to 64	8
Silt	29 to 62	79
Clay	5 to 22	8

5.2.8 Groundwater Conditions

Piezometers were installed in Boreholes 08-138, ML16 26+525, ML16 26+900 to monitor groundwater levels after completion of drilling. The measured groundwater levels are summarized in the table below.

Borehole	Date	Depth (m)	Elevation (m)
08-138	May 28, 2008	5.9	326.6
	July 23, 2008	1.6	330.9
ML16 26+525	November 27, 2017	5.7	324.4
	May 1, 2018	5.3	324.9
ML16 26+900	May 1, 2018	5.4	326.2

It should be noted that seasonal fluctuations of the groundwater level are to be expected. In particular, the groundwater level may be at a higher elevation after periods of significant and/or prolonged precipitation and spring snow melts.

5.3 Highway 7: Station 27+350 – 27+900 (08-149, 08-150, 08-151, ML16 27+675) – Appendix C

5.3.1 Topsoil/Peat

Topsoil/peat ranging in thickness from 600 mm to 800 mm was encountered at ground surface in Boreholes 08-150, 08-151, and ML16 27+675. Recorded moisture contents ranged from 82 percent to 287 percent.

5.3.2 Sand to Silty Sand

Sand to silty sand was encountered at ground surface in Borehole 08-149, below the topsoil in Borehole ML16 27+675, and below the sand and gravel layer in Borehole 08-150. The sand to silty sand had a thickness of 2.2 m to 2.4 m with an underside depth of 2.2 m to 3.1 m (Elevation



323.2 m to 319.6 m) in Boreholes 08-149 and ML16 27+675. Borehole 08-150 was terminated within the sand at a depth of 6.7 m below the ground surface (Elevation 316.3 m).

A 600 mm thick layer of sand was also encountered within the sandy silt till in Borehole 08-149, at a depth of approximately 4.8 m (Elevation 320.6 m).

SPT N-Values in the sand to silty sand ranged from 8 blows to 57 blows indicating a loose to very dense relative density.

Recorded moisture contents ranged from 8 percent to 19 percent. The gradation analyses completed on two samples of the sand to silty sand are illustrated on Figure C1 of Appendix C. The results of the tests are summarized below and are presented on the corresponding Record of Borehole sheets in Appendix C.

Soil Particle	Percentage (%) Sand	Percentage (%) Silty Sand
Gravel	8	1
Sand	80	67
Silt	12	27
Clay		5

5.3.3 Sandy Silt

A 0.8 m thick later of sandy silt was encountered below the clayey silt in Borehole 08-150 at a depth of 2.2 m below the ground surface (Elevation 320.8 m).

A SPT N-Value of 22 blows was obtained in the sandy silt indicating a compact relative density.

A moisture content of 32 percent was recorded. The gradation analysis completed on a sample of the sandy silt is illustrated on Figure C2 of Appendix C. The results of the test are summarized below and are presented on the corresponding Record of Borehole sheets in Appendix C.

Soil Particle	Percentage (%)
Gravel	0
Sand	39
Silt	56
Clay	5

5.3.4 Sand and Gravel to Gravelly Sand

A layer of sand and gravel to gravelly sand was encountered below the peat in Borehole 08-151 and below the sandy silt in Borehole 08-150. The thickness of the sand and gravel was 2.4 m to 2.6 m with an underside depth of 3.0 m to 5.6 m (Elevation 319.4 m to 317.4 m).

SPT N-Values in the sand and gravel to gravelly sand ranged from 10 blows to 33 blows indicating a compact to dense relative density.

Recorded moisture contents ranged from 8 percent to 22 percent. The gradation analyses completed on two samples of the sand and gravel to gravelly sand are illustrated on Figure C3 of Appendix C. The results of the tests are summarized below and are presented on the corresponding Record of Borehole sheets in Appendix C.

Soil Particle	Percentage (%)
Gravel	24 to 34
Sand	47 to 57
Silt	9 to 29
Clay	

5.3.5 Silty Clay to Clayey Silt

Silty clay to clayey silt was encountered below the peat in Borehole 08-150 and below the silty sand in Borehole ML16 27+675. The clayey silt had a thickness of 1.4 m with an underside depth of 2.2 m (Elevation 320.8 m) in Borehole 08-150. Borehole ML16 27+675 was terminated within the silty clay at a depth of 8.2 m below the ground surface (Elevation 314.5 m).

SPT N-Values in the silty clay to clayey silt ranged from 4 blows to 43 blows indicating a firm to hard consistency.

The recorded moisture contents ranged from 10 percent to 20 percent. Atterberg limit testing was completed on one sample of the silty clay deposit. The results are summarized on the Record of Borehole sheets in Appendix C and illustrated on Figure C4 in Appendix C. The laboratory results indicate the material is a silty clay of low plasticity (CL).

Parameter	Value
Liquid Limit	32
Plastic Limit	16
Plasticity Index	16

A gradation analysis completed on one sample of the silty clay is illustrated on Figure C5 of Appendix C. The results of the tests are summarized below and are presented on the corresponding Record of Borehole sheet in Appendix C.

Soil Particle	Percentage (%)
Gravel	0
Sand	11
Silt	39
Clay	50

5.3.6 Sandy Silt Till

A deposit of sandy silt till was encountered below the sand in Borehole 08-149 and below the gravelly sand in Borehole 08-151. Both boreholes were terminated in the sandy silt till at depths of 6.6 m and 6.2 m (Elevation 318.9 m and 316.1 m). It should be noted that glacial tills are known to contain cobbles and boulders.

SPT N-Values in the sandy silt till ranged from 14 blows to greater than 100 blows indicating a compact to very dense relative density.

The recorded moisture contents ranged from 6 percent to 19 percent. Atterberg limit testing was completed on one sample of the clayey silt layer within sandy silt till deposit. The results are summarized on the Record of Borehole sheets in Appendix C and illustrated on Figure C6 in Appendix C. The laboratory results indicate the layer within the sandy silt till is a clayey silt of low plasticity (CL-ML).

Parameter	Value
Liquid Limit	17
Plastic Limit	10
Plasticity Index	7

The gradation analyses completed on three samples of the sandy silt till are illustrated on Figures C7 of Appendix C. The results of the tests are summarized below and are presented on the corresponding Record of Borehole sheets in Appendix C.



Soil Particle	Percentage (%)
Gravel	1 to 3
Sand	30 to 39
Silt	49 to 63
Clay	6 to 16

5.3.7 Groundwater Conditions

A piezometer was installed in Borehole ML16 27+675 to monitor groundwater levels after completion of drilling. The measured groundwater levels are summarized in the table below.

Borehole	Date	Depth (m)	Elevation (m)
ML16 27+675	August 31, 2018	0.5	322.3

It should be noted that seasonal fluctuations of the groundwater level are to be expected. In particular, the groundwater level may be at a higher elevation after periods of significant and/or prolonged precipitation and spring snow melts.

5.4 Regional Road 30 (Shantz Station Road) – S-W Ramp: Station 28+400 – 28+500 (08-156, 08-158, SH16-02) – Appendix D

5.4.1 Fill

Sand to gravelly sand fill was encountered at ground surface in Boreholes 08-158 and SH16-02. the fill varied in thickness from 0.5 m to 2.2 m.

SPT N-Values recorded in the sand fill ranged from 8 blows to 20 blows indicating a loose to compact relative density.

Recorded moisture contents ranged from 5 percent to 13 percent.

5.4.2 Clayey Silt

A 1.2 m thick layer of clayey silt was encountered at ground surface in Borehole 08-156 and extended to Elevation 331.5 m. Occasional rootlets and organics were noted within the layer.

SPT N-Values ranged from 6 blows to 15 blows indicating a firm to very stiff consistency.

Recorded moisture contents ranged from 12 percent to 21 percent.

5.4.3 Sand

Sand was encountered below the clayey silt in Borehole 08-156 and within the silty clay till in Borehole SH16-02. The sand had a thickness of 3.0 m with an underside depth of 16.3 m



(Elevation 314.4 m) in Borehole SH16-02. Borehole 08-156 was terminated within the sand at a depth of 8.2 m below the ground surface (Elevation 324.5 m).

SPT N-Values ranged from 26 blows to 80 blows indicating a compact to very dense relative density.

Recorded moisture contents ranged from 5 percent to 19 percent. The gradation analyses completed on selected samples of the sand are illustrated on Figure D1 of Appendix D. The results of the tests are summarized below and are presented on the corresponding Record of Borehole sheets in Appendix D.

Soil Particle	Percentage (%)
Gravel	0 to 21
Sand	56 to 94
Silt	6 to 25
Clay	

5.4.4 Silty Clay to Clayey Silt Till

A deposit of silty clay to clayey silt till was encountered below the fill in Boreholes 08-158 and SH16-02. The silty clay to clayey silt till had a thickness of 17.2 m to 18.7 m with an underside depth of 17.7 m to 20.9 m (Elevation 312.3 m to 309.8 m). A silt layer with a thickness of 0.5 m was encountered in Borehole 08-158 at a depth of 8.8 m (Elevation 321.2 m). It should be noted that glacial tills are known to contain cobbles and boulders.

SPT N-Values ranged from 14 blows to greater than 100 blows indicating a stiff to hard consistency.

The recorded moisture contents ranged from 10 percent to 20 percent. Atterberg limit testing was completed on selected samples of the cohesive till deposit. The results are summarized on the Record of Borehole sheets in Appendix D and illustrated on Figures D2 and D3 in Appendix D. The laboratory results indicate the till is a silty clay to clayey silt of low to intermediate plasticity (CL-ML to CI).

Parameter	Silty Clay Till	Clayey Silt Till
Liquid Limit	25 to 42	20
Plastic Limit	12 to 19	13
Plasticity Index	13 to 23	7

The gradation analyses completed on selected samples of the till, including one sample of silt within the till, are illustrated on Figures D4 through D6 of Appendix D. The results of the tests are

summarized below and are presented on the corresponding Record of Borehole sheets in Appendix D.

Soil Particle	Percentage (%) Silty Clay Till	Percentage (%) Clayey Silt Till	Percentage (%) Silt Layer
Gravel	1 to 8	0	1
Sand	6 to 29	5 to 7	16
Silt	29 to 48	75 to 78	76
Clay	28 to 58	15 to 20	7

5.4.5 Silty Sand to Sandy Silt Till

Silty sand to sandy silt till was encountered below the silty clay till in Boreholes 08-158 and SH16-02. The silty sand till had a thickness of 1.0 m with an underside depth of 21.9 m (Elevation 308.7 m) in Borehole SH16-02. Borehole 08-158 was terminated within the sandy silt till at a depth of 21.4 m below the ground surface (Elevation 308.6 m). It should be noted that glacial tills are known to contain cobbles and boulders.

SPT N-Values in the silty sand to sandy silt till exceeded 100 blows indicating a very dense relative density.

The recorded moisture contents ranged from 8 percent to 9 percent. Atterberg limit testing was completed on one sample of the clayey silt layer within the sandy silt till deposit. The results are summarized on the Record of Borehole sheets in Appendix D and illustrated on Figure D7 in Appendix D. The laboratory results indicate the layer within the sandy silt till is clayey silt of low plasticity (CL-ML).

Parameter	Value
Liquid Limit	18
Plastic Limit	11
Plasticity Index	7

The gradation analyses completed on one sample of the silty sand till including one sample of clayey silt and sand layer within the till are illustrated on Figures D8 and D9 of Appendix D, respectively. The results of the tests are summarized below and are presented on the corresponding Record of Borehole sheets in Appendix D.



Soil Particle	Percentage (%) Silty Sand	Percentage (%) Clayey Silt and Sand Layer
Gravel	4 to 13	4
Sand	42	42
Silt	33 to 39	40
Clay	12 to 15	14

5.4.6 Bedrock

Limestone bedrock was proven by coring techniques at a depth of 21.9 m (Elevation 308.7 m) in Borehole SH16-02. Runs 1 and 2 obtained a Total Core Recovery (TCR) of 98 percent to 100 percent, a Solid Core Recovery (SCR) of 98 percent to 100 percent, and a Rock Quality Designation (RQD) ranging from 53 percent to 86 percent. Average UCS values of 94 MPa and 138 MPa were measured on recovered core samples from Runs 1 and 2, respectively.

5.4.7 Groundwater Conditions

Piezometers were installed in Boreholes 08-156, 08-158 and SH16-02 to monitor groundwater levels after completion of drilling. The measured groundwater levels are summarized in the table below.

Borehole	Date	Depth (m)	Elevation (m)
08-156	January 9, 2009	3.5	329.2
	February 2, 2009	7.1	325.6
08-158	May 28, 2008	6.8	323.2
	June 2, 2008	8.8	321.2
	July 15, 2008	9.0	321.0
	August 20, 2008	6.8	323.2
SH16-02	December 18, 2017	- *	- *

* Piezometer was damaged prior to taking water level measurements.

It should be noted that seasonal fluctuations of the groundwater level are to be expected. In particular, the groundwater level may be at a higher elevation after periods of significant and/or prolonged precipitation and spring snow melts.



5.5 Highway 7: Station 29+950 – 30+150 (08-171, ML16 29+950, ML16 30+000, ML16 30+150) – Appendix E

5.5.1 Topsoil

Topsoil ranging in thickness from 125 mm to 375 mm was encountered at ground surface in all the boreholes at this location. Recorded moisture contents ranged from 18 percent to 31 percent.

5.5.2 Silty Sand

A layer of silty sand was encountered below the topsoil in Boreholes 08-171 and ML16 30+150. The silty sand had a thickness of 1.0 m to 1.7 m with an underside depth of 1.2 m to 1.8 m (Elevation 329.8 m to 328.6 m).

SPT N-Values in the silty sand layer ranged from 5 blows to 25 blows indicating a loose to compact relative density.

Recorded moisture contents ranged from 8 percent to 19 percent. The gradation analysis completed on one sample of the silty sand is illustrated on Figure E1 of Appendix E. The results of the test are summarized below and are presented on the corresponding Record of Borehole sheets in Appendix E.

Soil Particle	Percentage (%)
Gravel	7
Sand	50
Silt	43
Clay	

5.5.3 Sandy Silt Till

Sandy silt till was encountered below the topsoil in Boreholes ML16 29+950 and ML16 30+000 and below the silty sand in Boreholes 08-171 and ML16 30+150. All four boreholes were terminated in the sandy silt till at depths of 4.6 m to 8.0 m (Elevation 325.2 m to 322.3 m). It should be noted that glacial tills are known to contain cobbles and boulders.

SPT N-Values ranged from 4 blows to greater than 100 blows indicating a loose to very dense relative density.

Recorded moisture contents ranged from 2 percent to 28 percent. The gradation analyses completed on selected samples of the sandy silt till are illustrated on Figure E2 of Appendix E. The results of the tests are summarized below and are presented on the corresponding Record of Borehole sheets in Appendix E.

Soil Particle	Percentage (%)
Gravel	0 to 7
Sand	35 to 45
Silt	37 to 46
Clay	12 to 17

5.5.4 Groundwater Conditions

No piezometers were installed in the boreholes at this location. The water level was measured at depths ranging from 0.9 m to 3.8 m in the open boreholes upon completion of drilling.

5.6 Regional Road 30 (Shantz Station Road) – N/S-E Ramp: Station 28+420 – 28+600 (08-159) – Appendix F

5.6.1 Topsoil

Topsoil with a thickness of 200 mm was encountered at ground surface in Borehole 08-159.

5.6.2 Fill

Silty clay fill was encountered below the topsoil in Borehole 08-159. The silty clay fill had a thickness of 1.2 m with an underside depth of 1.4 m (Elevation 327.8 m).

A SPT N-Value of 11 blows was obtained in the silty clay fill indicating a stiff consistency.

A moisture content of 20 percent was recorded on a sample of the fill.

5.6.3 Silty Clay Till

A deposit of silty clay till was encountered below the fill in Borehole 08-159. The silty clay till had a thickness of 14.3 m with an underside depth of 15.7 m (Elevation 313.5 m). A 1.5 m thick layer of sandy silt till and a 700 mm thick layer of silt were encountered within the silty clay till at depths of approximately 4.1 m (Elevation 325.1 m) and 10.8 m (Elevation 318.4 m), respectively. It should be noted that glacial tills are known to contain cobbles and boulders.

SPT N-Values in the silty clay till ranged from 23 blows to greater than 100 blows indicating a very stiff to hard consistency.

The recorded moisture contents ranged from 12 percent to 31 percent. Atterberg limit testing was completed on selected samples of the silty clay till deposit. The results are summarized on the Record of Borehole sheet in Appendix F and illustrated on Figure F1 in Appendix F. The laboratory results indicate the till is a silty clay of low to intermediate plasticity (CL to CI).

Parameter	Value
Liquid Limit	19 to 44
Plastic Limit	11 to 20
Plasticity Index	8 to 24

The gradation analyses completed on selected samples of the silty clay till, and one sample of the silt layer, are illustrated on Figures F2 and F3 of Appendix F. The results of the tests are summarized below and are presented on the corresponding Record of Borehole sheets in Appendix F.

Soil Particle	Percentage (%)	Percentage (%) Silt Layer
Gravel	0 to 5	0
Sand	1 to 34	8
Silt	35 to 68	81
Clay	23 to 65	10

5.6.4 Silty Sand to Sandy Silt Till

Silty sand to sandy silt till was encountered within and below the silty clay till in Borehole 08-159. Borehole 08-159 was terminated in the sandy silt till at a depth of 20.0 m (Elevation 309.2 m). It should be noted that glacial tills are known to contain cobbles and boulders.

SPT N-Values in the till exceeded 100 blows indicating a very dense relative density.

Recorded moisture contents ranged from 8 percent to 19 percent. The gradation analyses completed on two samples of the silty sand to sandy silt till are illustrated on Figure F4 of Appendix F. The results of the tests are summarized below and are presented on the corresponding Record of Borehole sheets in Appendix F.

Soil Particle	Percentage (%)
Gravel	5 to 16
Sand	41 to 43
Silt	33 to 40
Clay	8 to 15

5.6.5 Groundwater Conditions

No piezometer was installed in Borehole 08-159 but was dry upon completion of drilling.



5.7 Regional Road 30 (Shantz Station Road) – E-N/S Ramp: Station 28+625 – 28+675 (08-153) – Appendix G

5.7.1 Fill

Sandy silty clay fill was encountered at ground surface in Borehole 08-153. The clayey silt fill had a thickness of 0.8 m and extended to Elevation 330.3 m.

A SPT N-Value of 10 blows was obtained within the clayey silt fill indicating a stiff consistency.

A moisture content of 20 percent was recorded on a sample of the fill.

5.7.2 Silty Clay Till

A deposit of silty clay, some sand to sandy till was encountered below the fill in Borehole 08-153. Borehole 08-153 was terminated in the silty clay till at a depth of 6.4 m (Elevation 324.6 m). It should be noted that glacial tills are known to contain cobbles and boulders.

SPT N-Values ranged from 19 blows to greater than 100 blows indicating a very stiff to hard consistency.

The recorded moisture contents ranged from 8 percent to 21 percent. Atterberg limit testing was completed on two samples in the silty clay till. The results are summarized on the Record of Borehole sheet in Appendix G and illustrated on Figure G1 in Appendix G. The laboratory results indicate the till is a silty clay of low plasticity (CL).

Parameter	Value
Liquid Limit	21 to 34
Plastic Limit	12 to 15
Plasticity Index	9 to 19

The gradation analyses completed on two samples in the silty clay till are illustrated on Figure G2 of Appendix G. The results of the tests are summarized below and are presented on the corresponding Record of Borehole sheets in Appendix G.

Soil Particle	Percentage (%)
Gravel	0 to 2
Sand	18 to 34
Silt	40 to 47
Clay	17 to 42



5.7.3 Groundwater Conditions

A piezometer was installed in Borehole 08-153 to monitor groundwater levels after completion of drilling. The measured groundwater levels are summarized in the table below.

Borehole	Date	Depth (m)	Elevation (m)
08-153	January 9, 2009	3.2	327.9
	February 2, 2009	2.0	329.1

It should be noted that seasonal fluctuations of the groundwater level are to be expected. In particular, the groundwater level may be at a higher elevation after periods of significant and/or prolonged precipitation and spring snow melts.

5.8 Regional Road 30 (Shantz Station Road): Station 8+850 – 9+825 (08-152, SH16 09+880) – Appendix H

5.8.1 Topsoil

Topsoil with a thickness of 175 mm was encountered at ground surface in Borehole 08-152.

5.8.2 Fill

Gravelly sand fill was encountered at ground surface in Borehole SH16 09+880. The gravelly sand fill had a thickness of 1.4 m and extended to Elevation 329.4 m.

SPT N-Values in the gravelly sand fill ranged from 29 blows to 30 blows indicating a compact relative density.

The recorded moisture contents ranged from 4 percent to 7 percent.

5.8.3 Sand

A 1.2 m thick layer of sand was encountered below the topsoil in Borehole 08-152 with an underside depth of 1.4 m (Elevation 326.2 m).

A SPT N-Value of 17 blows was obtained in the sand layer indicating a compact relative density.

A moisture content of 17 percent was recorded.

5.8.4 Sandy Silt to Silt Till

Sandy silt to silt till was encountered below the sand in Borehole 08-152 and below the fill in Borehole SH16 09+880. Both boreholes were terminated in the sandy silt to silt till at depths between 6.7 m and 5.2 m (Elevation 320.9 m and 325.6 m). It should be noted that glacial tills are known to contain cobbles and boulders.



Layers of gravelly sand and silt were encountered within the sandy silt till layer in Borehole 08-152 at approximate depths of 2.1 m and 4.6 m (Elevation 325.5 m and 323.0 m), respectively.

SPT N-Values in the sandy silt till ranged from 22 blows to 90 blows indicating a compact to very dense relative density.

Recorded moisture contents ranged from 5 percent to 21 percent. The gradation analyses completed on two samples of the sandy silt to silt till, one sample within the gravelly silty sand layer, and one sample within the silty sand layer, are illustrated on Figures H1 through H3 of Appendix H. The results of the tests are summarized below and are presented on the corresponding Record of Borehole sheets in Appendix H.

Soil Particle	Percentage (%) Sandy Silt to Silt Till	Percentage (%) Gravelly Silty Sand Layer	Percentage (%) Silty Sand Layer
Gravel	0	30	0
Sand	17 to 35	53	54
Silt	60 to 79	17	36
Clay	4 to 5		10

5.8.5 Groundwater Conditions

No piezometers were installed in the boreholes at this location. The water level was measured at a depth of 4.6 m in Borehole SH16 09+880 upon completion of drilling.

5.9 Highway 7: Station 29+200 – 29+400 (ML16 29+200, ML16 29+250, ML16 29+300, ML16 29+350, ML16 29+400) – Appendix I

5.9.1 Topsoil

Topsoil ranging in thickness from 300 mm to 600 mm was encountered at ground surface in all the boreholes at this location. Recorded moisture contents ranged from 16 percent to 25 percent.

5.9.2 Clayey Silt to Silty Clay Till

A deposit of clayey silt to silty clay till was encountered below the topsoil in Boreholes ML16 29+200 and ML16 29+400 and below or within the silty clay to clay in Boreholes ML16 29+250 and ML16 29+350. The silty clay till had a thickness of 4.2 m with an underside depth of 8.3 m (Elevation 328.2 m) in Borehole ML16 29+350. Boreholes ML16 29+200, ML16 29+250, and ML16 29+400 were terminated within the silty clay till at a depth of 6.5 m to 9.8 m below the ground surface (Elevation 328.1 m to 326.0 m). It should be noted that glacial tills are known to contain cobbles and boulders.

SPT N-Values ranged from 7 blows to greater than 100 blows indicating a firm to hard consistency (typically hard).

The recorded moisture contents ranged from 7 percent to 18 percent. Atterberg limit testing was completed on two samples of the clayey silt till deposit. The results are summarized on the Record of Borehole sheets in Appendix I and illustrated on Figure I1 in Appendix I. The laboratory results indicate the till is a clayey silt of low plasticity (CL-ML).

Parameter	Value
Liquid Limit	19 to 24
Plastic Limit	14 to 17
Plasticity Index	5 to 7

The gradation analyses completed on selected samples of the silty clay to clayey silt till are illustrated on Figure I2 of Appendix I. The results of the tests are summarized below and are presented on the corresponding Record of Borehole sheets in Appendix I.

Soil Particle	Percentage (%)
Gravel	1 to 6
Sand	25 to 43
Silt	39 to 58
Clay	15 to 31

5.9.3 Silty Clay to Clay

Silty clay to clay was encountered below the topsoil in Boreholes ML16 29+250 to ML16 29+350. The silty clay had a thickness of 3.6 m to 11.2 m with an underside depth of 4.1 m to 11.7 m (Elevation 331.3 m to 324.7 m) in Boreholes ML16 29+250 and ML16 29+350. Borehole ML16 29+300 was terminated within the silty clay to clay at a depth of 9.8 m below the ground surface (Elevation 326.3 m).

A silt layer was encountered within the silty clay to clay at a depth of approximately 5.08 m (Elevation 330.9 m).

SPT N-Values ranged from 7 blows to 86 blows indicating a firm to hard consistency.

The recorded moisture contents ranged from 9 percent to 26 percent. Atterberg limit testing was completed on three samples of the silty clay to clay deposit. The results are summarized on the Record of Borehole sheets in Appendix I and illustrated on Figure I3 in Appendix I. The laboratory results indicate the deposit ranges from a silty clay of low to intermediate plasticity (CL to CI) to a clay of high plasticity (CH).



Parameter	Value
Liquid Limit	32 to 53
Plastic Limit	16 to 23
Plasticity Index	16 to 30

The gradation analyses completed on four samples of the silty clay, and one sample of the silt layer with the silty clay are illustrated on Figures I4 and I5 of Appendix I, respectively. The results of the tests are summarized below and are presented on the corresponding Record of Borehole sheets in Appendix I.

Soil Particle	Percentage (%) Silty Clay	Percentage (%) Silt Layer
Gravel	0 to 1	0
Sand	2 to 15	0
Silt	31 to 40	78
Clay	44 to 67	22

5.9.4 Groundwater Conditions

No piezometers were installed in the four boreholes at this location. The open boreholes were dry upon completion of drilling.

6 MISCELLANEOUS

Borehole locations were selected relative to existing site features and anticipated high fill embankment and deep cut locations.

All-Terrain Drilling from Waterloo, Ontario, DBW Drilling from Ajax, Ontario, and Altech Drilling and Investigative Services Limited from Cambridge, Ontario supplied and operated the drill rig to carry out the drilling, sampling, in-situ testing, standpipe installation and borehole decommissioning. The field investigations were supervised by Messrs. Stephane Loranger, Luke Gilarski, Ligang Hao, Troy Mackinnon, Omar Ali, Bryan Lui, Justin Buis, Saeed Bastan, and George Azzopardi of Thurber. Overall supervision of the investigation program was conducted by Mr. Mark Farrant, P.Eng. and Ms. Nancy Berg, P.Eng.



Routine geotechnical laboratory testing was carried out by Thurber's geotechnical laboratory in Oakville, Ontario. Interpretation of the data and preparation of this report were carried out by Messrs. Michael Eastman, P.Eng., and Geoff Lay, P.Eng.. The report was reviewed by Messrs. Christopher Ng, P.Eng., and Jason Lee, P.Eng., a Designated Principal Contact for MTO Foundation Projects.

Thurber Engineering Ltd.
Report Prepared By:

Michael Eastman, P.Eng.
Associate, Geotechnical Engineer



Christopher Ng, P.Eng.
Associate, Senior Geotechnical Engineer



Jason Lee, P.Eng.,
Partner, Senior Geotechnical Engineer
Designated MTO Contact

STATEMENT OF LIMITATIONS AND CONDITIONS

1. STANDARD OF CARE

This Report has been prepared in accordance with generally accepted engineering or environmental consulting practices in the applicable jurisdiction. No other warranty, expressed or implied, is intended or made.

2. COMPLETE REPORT

All documents, records, data and files, whether electronic or otherwise, generated as part of this assignment are a part of the Report, which is of a summary nature and is not intended to stand alone without reference to the instructions given to Thurber by the Client, communications between Thurber and the Client, and any other reports, proposals or documents prepared by Thurber for the Client relative to the specific site described herein, all of which together constitute the Report.

IN ORDER TO PROPERLY UNDERSTAND THE SUGGESTIONS, RECOMMENDATIONS AND OPINIONS EXPRESSED HEREIN, REFERENCE MUST BE MADE TO THE WHOLE OF THE REPORT. THURBER IS NOT RESPONSIBLE FOR USE BY ANY PARTY OF PORTIONS OF THE REPORT WITHOUT REFERENCE TO THE WHOLE REPORT.

3. BASIS OF REPORT

The Report has been prepared for the specific site, development, design objectives and purposes that were described to Thurber by the Client. The applicability and reliability of any of the findings, recommendations, suggestions, or opinions expressed in the Report, subject to the limitations provided herein, are only valid to the extent that the Report expressly addresses proposed development, design objectives and purposes, and then only to the extent that there has been no material alteration to or variation from any of the said descriptions provided to Thurber, unless Thurber is specifically requested by the Client to review and revise the Report in light of such alteration or variation.

4. USE OF THE REPORT

The information and opinions expressed in the Report, or any document forming part of the Report, are for the sole benefit of the Client. NO OTHER PARTY MAY USE OR RELY UPON THE REPORT OR ANY PORTION THEREOF WITHOUT THURBER'S WRITTEN CONSENT AND SUCH USE SHALL BE ON SUCH TERMS AND CONDITIONS AS THURBER MAY EXPRESSLY APPROVE. Ownership in and copyright for the contents of the Report belong to Thurber. Any use which a third party makes of the Report, is the sole responsibility of such third party. Thurber accepts no responsibility whatsoever for damages suffered by any third party resulting from use of the Report without Thurber's express written permission.

5. INTERPRETATION OF THE REPORT

- a) Nature and Exactness of Soil and Contaminant Description: Classification and identification of soils, rocks, geological units, contaminant materials and quantities have been based on investigations performed in accordance with the standards set out in Paragraph 1. Classification and identification of these factors are judgmental in nature. Comprehensive sampling and testing programs implemented with the appropriate equipment by experienced personnel may fail to locate some conditions. All investigations utilizing the standards of Paragraph 1 will involve an inherent risk that some conditions will not be detected and all documents or records summarizing such investigations will be based on assumptions of what exists between the actual points sampled. Actual conditions may vary significantly between the points investigated and the Client and all other persons making use of such documents or records with our express written consent should be aware of this risk and the Report is delivered subject to the express condition that such risk is accepted by the Client and such other persons. Some conditions are subject to change over time and those making use of the Report should be aware of this possibility and understand that the Report only presents the conditions at the sampled points at the time of sampling. If special concerns exist, or the Client has special considerations or requirements, the Client should disclose them so that additional or special investigations may be undertaken which would not otherwise be within the scope of investigations made for the purposes of the Report.
- b) Reliance on Provided Information: The evaluation and conclusions contained in the Report have been prepared on the basis of conditions in evidence at the time of site inspections and on the basis of information provided to Thurber. Thurber has relied in good faith upon representations, information and instructions provided by the Client and others concerning the site. Accordingly, Thurber does not accept responsibility for any deficiency, misstatement or inaccuracy contained in the Report as a result of misstatements, omissions, misrepresentations, or fraudulent acts of the Client or other persons providing information relied on by Thurber. Thurber is entitled to rely on such representations, information and instructions and is not required to carry out investigations to determine the truth or accuracy of such representations, information and instructions.
- c) Design Services: The Report may form part of design and construction documents for information purposes even though it may have been issued prior to final design being completed. Thurber should be retained to review final design, project plans and related documents prior to construction to confirm that they are consistent with the intent of the Report. Any differences that may exist between the Report's recommendations and the final design detailed in the contract documents should be reported to Thurber immediately so that Thurber can address potential conflicts.
- d) Construction Services: During construction Thurber should be retained to provide field reviews. Field reviews consist of performing sufficient and timely observations of encountered conditions in order to confirm and document that the site conditions do not materially differ from those interpreted conditions considered in the preparation of the report. Adequate field reviews are necessary for Thurber to provide letters of assurance, in accordance with the requirements of many regulatory authorities.

6. RELEASE OF POLLUTANTS OR HAZARDOUS SUBSTANCES

Geotechnical engineering and environmental consulting projects often have the potential to encounter pollutants or hazardous substances and the potential to cause the escape, release or dispersal of those substances. Thurber shall have no liability to the Client under any circumstances, for the escape, release or dispersal of pollutants or hazardous substances, unless such pollutants or hazardous substances have been specifically and accurately identified to Thurber by the Client prior to the commencement of Thurber's professional services.

7. INDEPENDENT JUDGEMENTS OF CLIENT

The information, interpretations and conclusions in the Report are based on Thurber's interpretation of conditions revealed through limited investigation conducted within a defined scope of services. Thurber does not accept responsibility for independent conclusions, interpretations, interpolations and/or decisions of the Client, or others who may come into possession of the Report, or any part thereof, which may be based on information contained in the Report. This restriction of liability includes but is not limited to decisions made to develop, purchase or sell land.



METRIC
DIMENSIONS ARE IN METRES
AND/OR MILLIMETRES
UNLESS OTHERWISE SHOWN

CONT No
WP No

HIGHWAY 7
DEEP CUT
SITE LOCATION PLAN

SHEET

THURBER ENGINEERING LTD.

Latitude: 43.494812° Longitude: -80.409807°

KEYPLAN

NO	ELEVATION	NORTHING	EASTING

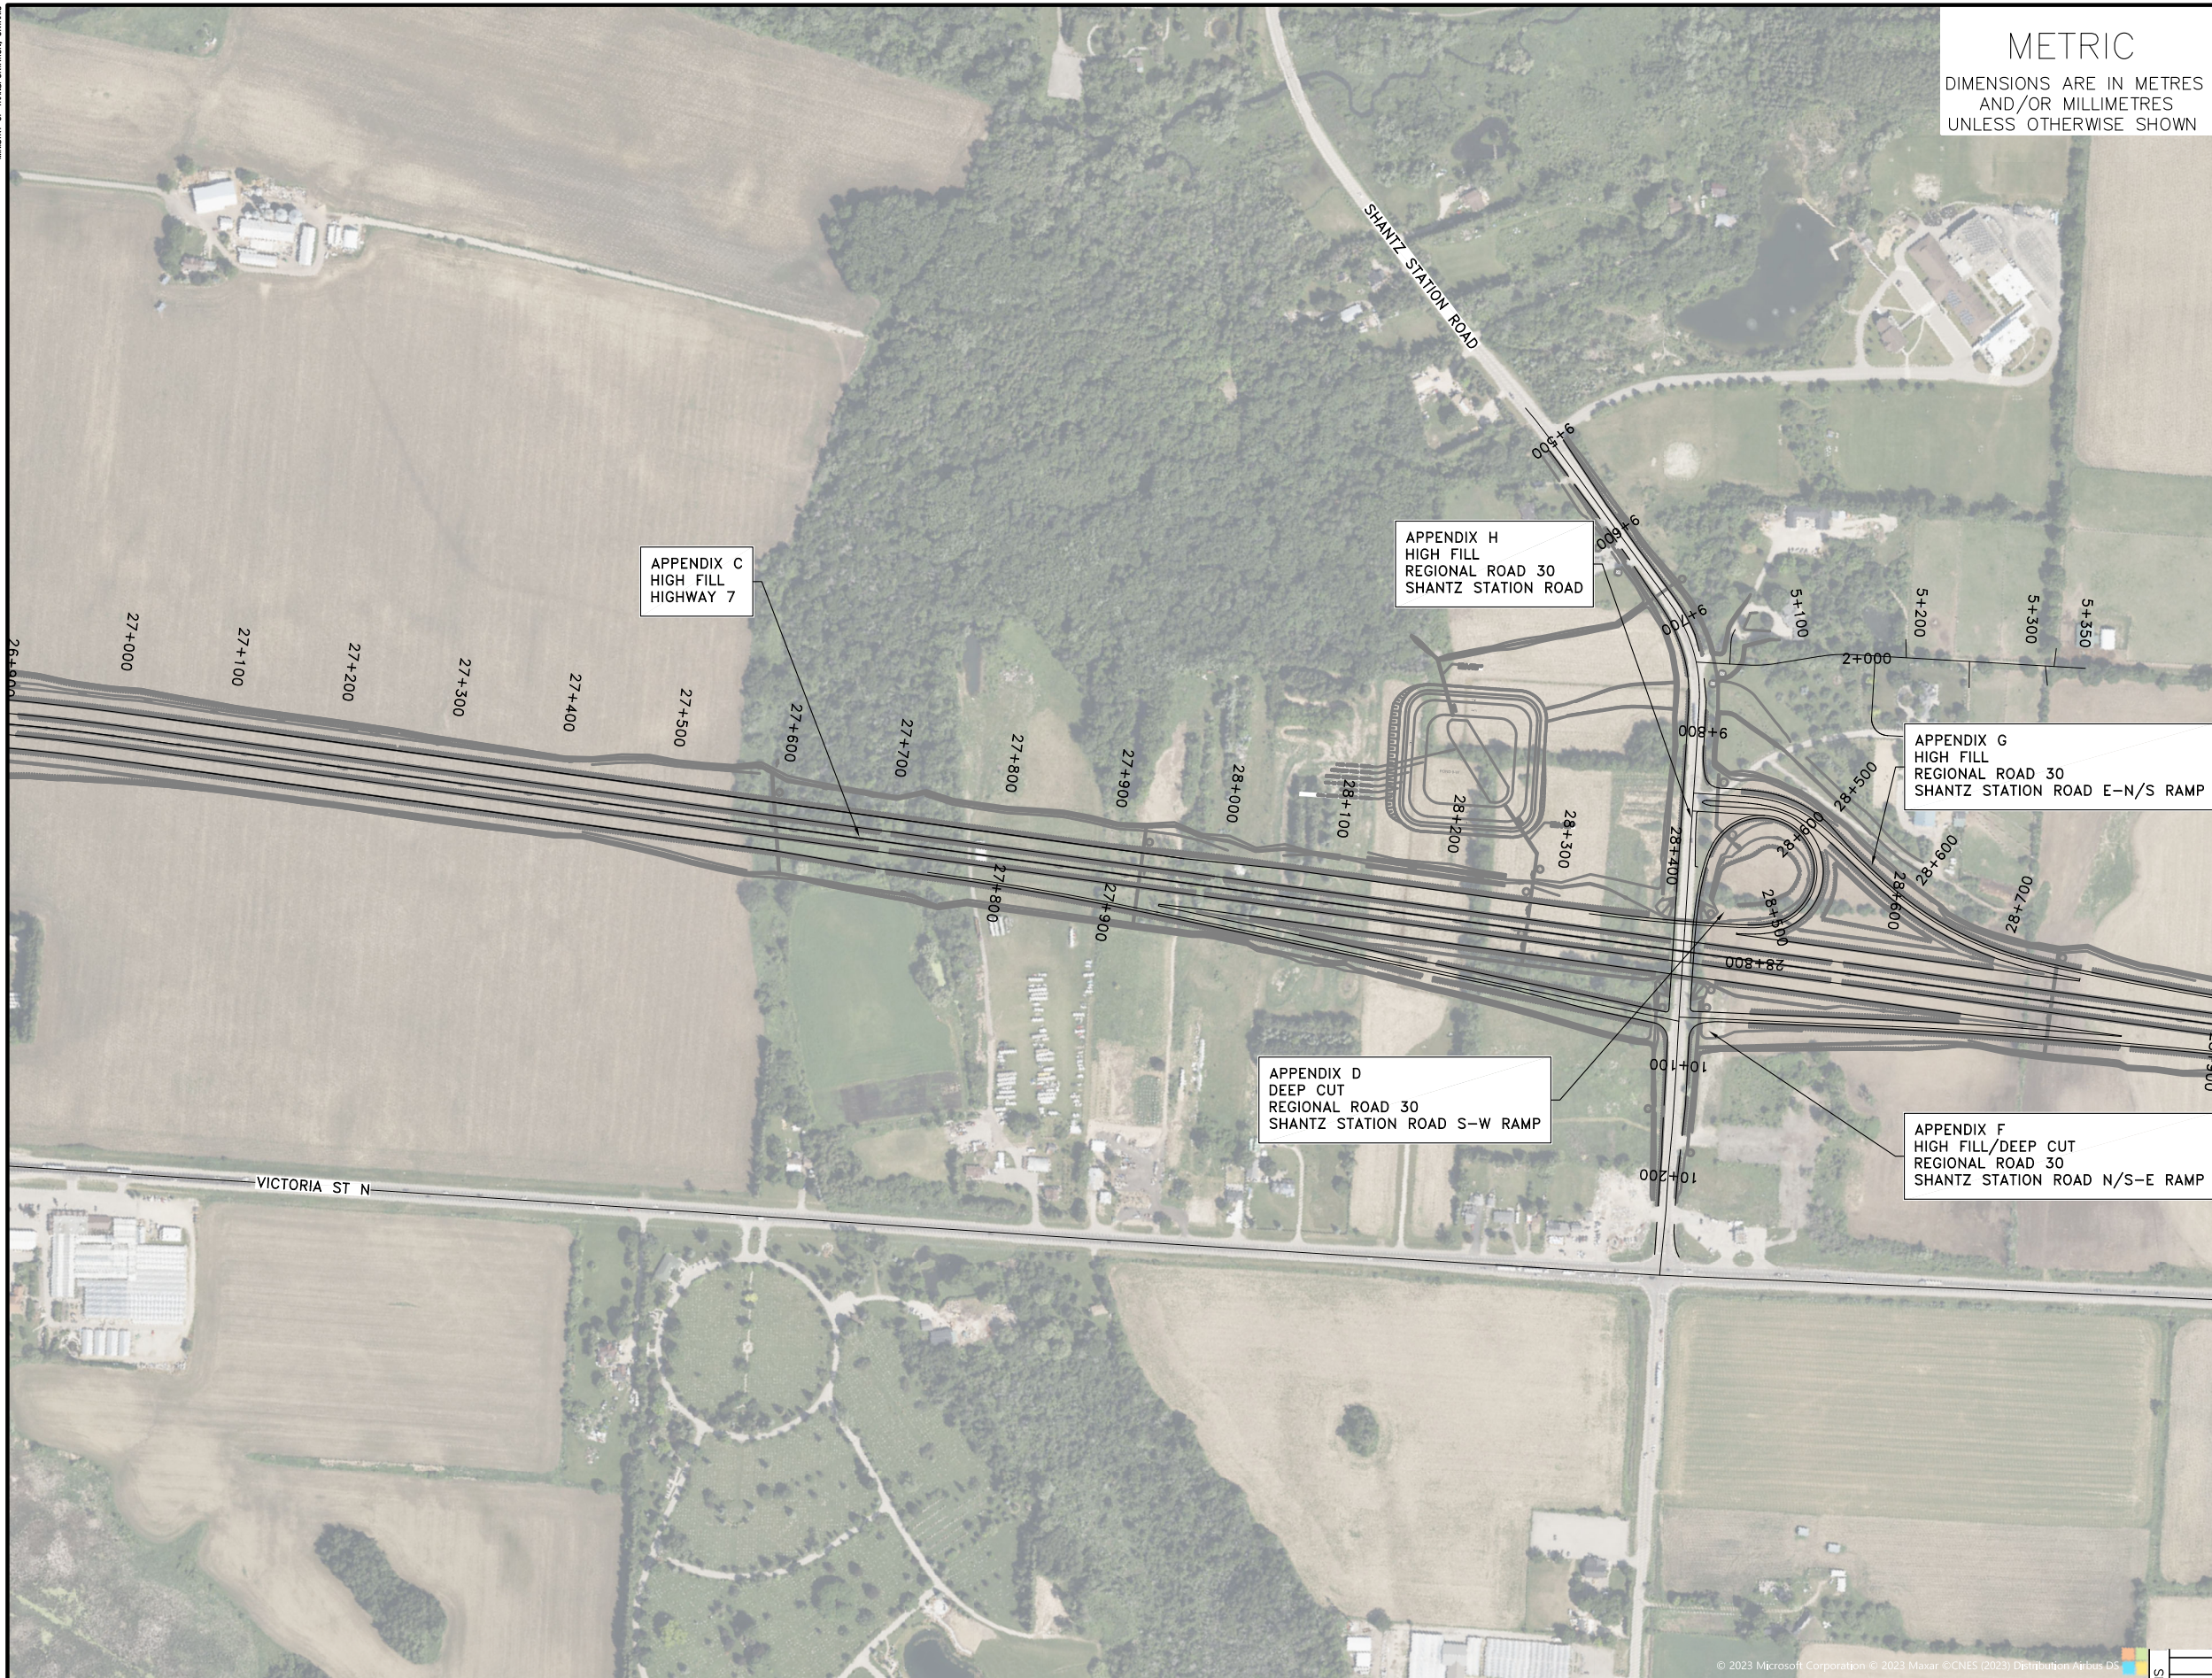
-NOTES-

- 1) The boundaries between soil strata have been established only at Borehole locations. Between Boreholes the boundaries are assumed from geological evidence.
- 2) This drawing is for subsurface information only. Surface details and features are for conceptual illustration.
- 3) Coordinate system is MTM NAD 83 Zone 10.

GEOCRES No. 40P09-067




REVISIONS		DESIGN				DATE		FEB 2024	
DATE	BY	CHK	CODE	LOAD	STRUCT	DATE	DATE	DATE	DATE



METRIC
DIMENSIONS ARE IN METRES
AND/OR MILLIMETRES
UNLESS OTHERWISE SHOWN

CONT No
WP No




SHEET |

HIGHWAY 7
HIGH FILL/DEEP CUT
SITE LOCATION PLAN



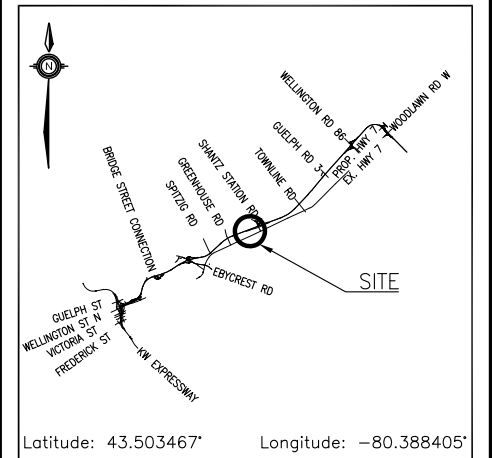THURBER ENGINEERING LTD.



KEYPLAN


[illegible]

-NOTES-


- 1) The boundaries between soil strata have been established only at Borehole locations. Between Boreholes the boundaries are assumed from geological evidence.
- 2) This drawing is for subsurface information only. Surface details and features are for conceptual illustration.
- 3) Coordinate system is MTM NAD 83 Zone 10.


GEOCRES No. 40P09-067

PLAN



REVISIONS						
DATE	BY	DESCRIPTION				
DESIGN	MC	CHK	CODE	LOAD	DATE	FEB 2024
DRAWN	MC	CHK	SITE	STRUCT	DWG	2

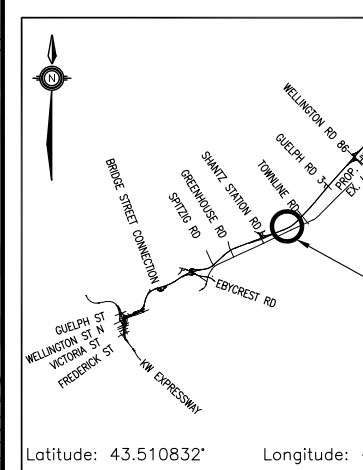CONT No
WP No
HIGHWAY 7 HIGH FILL/DEEP CUT SITE LOCATION PLAN




[illegible]

- 1) The boundaries between soil strata established only at Borehole locations. Boreholes the boundaries are assumed from geological evidence.
- 2) This drawing is for subsurface information. Surface details and features are for illustration.
- 3) Coordinate system is MTM NAD 83

GEOCRES No. 40P09-067

REVISIONS									
	DATE	BY	DESCRIPTION						
DESIGN		CHK		CODE		LOAD		DATE	FEB 2024
DRAWN	MC	CHK		SITE		STRUCT	DWG	3	

SYMBOLS, ABBREVIATIONS AND TERMS USED ON RECORDS OF BOREHOLES

1. TEXTURAL CLASSIFICATION OF SOILS

CLASSIFICATION	PARTICLE SIZE	VISUAL IDENTIFICATION
Boulders	Greater than 200mm	same
Cobbles	75 to 200mm	same
Gravel	4.75 to 75mm	5 to 75mm
Sand	0.075 to 4.75mm	Not visible particles to 5mm
Silt	0.002 to 0.075mm	Non-plastic particles, not visible to the naked eye
Clay	Less than 0.002mm	Plastic particles, not visible to the naked eye

2. COARSE GRAIN SOIL DESCRIPTION (50% greater than 0.075mm)

TERMINOLOGY	PROPORTION
Trace or Occasional	Less than 10%
Some	10 to 20%
Adjective (e.g. silty or sandy)	20 to 35%
And (e.g. sand and gravel)	35 to 50%

3. TERMS DESCRIBING CONSISTENCY (COHESIVE SOILS ONLY)

DESCRIPTIVE TERM	UNDRAINED SHEAR STRENGTH (kPa)	APPROXIMATE SPT ⁽¹⁾ 'N' VALUE
Very Soft	12 or less	Less than 2
Soft	12 to 25	2 to 4
Firm	25 to 50	4 to 8
Stiff	50 to 100	8 to 15
Very Stiff	100 to 200	15 to 30
Hard	Greater than 200	Greater than 30

NOTE: Hierarchy of Soil Strength Prediction

- 1) Laboratory Triaxial Testing
- 2) Field Insitu Vane Testing
- 3) Laboratory Vane Testing
- 4) SPT value
- 5) Pocket Penetrometer


4. TERMS DESCRIBING DENSITY (COHESIONLESS SOILS ONLY)

DESCRIPTIVE TERM	SPT "N" VALUE
Very Loose	Less than 4
Loose	4 to 10
Compact	10 to 30
Dense	30 to 50
Very Dense	Greater than 50

5. LEGEND FOR RECORDS OF BOREHOLES

SYMBOLS AND ABBREVIATIONS FOR SAMPLE TYPE	SS Split Spoon Sample	WS Wash Sample	AS Auger (Grab) Sample
	TW Thin Wall Shelby Tube Sample	TP Thin Wall Piston Sample	
	PH Sampler Advanced by Hydraulic Pressure	PM Sampler Advanced by Manual Pressure	
	WH Sampler Advanced by Self Static Weight	RC Rock Core	SC Soil Core

$$\text{Sensitivity} = \frac{\text{Undisturbed Shear Strength}}{\text{Remoulded Shear Strength}}$$

 Water Level






C_{pen} Shear Strength Determination by Pocket Penetrometer

- (1) SPT 'N' Value Standard Penetration Test 'N' Value – refers to the number of blows from a 63.5kg hammer free falling a height of 0.76m to advance a standard 50 mm outside diameter split spoon sampler for 0.3 m depth into undisturbed ground.
- (2) DCPT Dynamic Cone Penetration Test – Continuous penetration of a 50 mm outside diameter, 60° conical steel point attached to "A" size rods driven by a 63.5 kg hammer free falling a height of 0.76 m. The resistance to cone penetration is the number of hammer blows required for each 0.3 m advance of the conical point into undisturbed ground.

UNIFIED SOILS CLASSIFICATION

MAJOR DIVISIONS		GROUP SYMBOL	TYPICAL DESCRIPTION
COARSE GRAINED SOILS	GRAVEL AND GRAVELLY SOILS	GW	Well-graded gravels or gravel-sand mixtures, little or no fines.
		GP	Poorly-graded gravels or gravel-sand mixtures, little or no fines.
		GM	Silty gravels, gravel-sand-silt mixtures.
		GC	Clayey gravels, gravel-sand-clay mixtures.
	SAND AND SANDY SOILS	SW	Well-graded sands or gravelly sands, little or no fines.
		SP	Poorly-graded sands or gravelly sands, little or no fines.
		SM	Silty sands, sand-silt mixtures.
		SC	Clayey sands, sand-clay mixtures.
FINE GRAINED SOILS	SILTS AND CLAYS W _L < 50%	ML	Inorganic silts and very fine sands, rock flour, silty or clayey fine sands or clayey silts with slight plasticity.
		CL	Inorganic clays of low to medium plasticity, gravelly clays, sandy clays, silty clays, lean clays. (W _L < 30%).
		CI	Inorganic clays of medium plasticity, silty clays. (30% < W _L < 50%).
		OL	Organic silts and organic silty-clays of low plasticity.
	SILTS AND CLAYS W _L > 50%	MH	Inorganic silts, micaceous or diatomaceous fine sandy or silty soils, elastic silts.
		CH	Inorganic clays of high plasticity, fat clays.
		OH	Organic clays of medium to high plasticity, organic silts.
HIGHLY ORGANIC SOILS		Pt	Peat and other highly organic soils.
CLAY SHALE			
SANDSTONE			
SILTSTONE			
CLAYSTONE			
COAL			

EXPLANATION OF ROCK LOGGING TERMS

<u>ROCK WEATHERING CLASSIFICATION</u>		<u>SYMBOLS</u>	
Fresh (FR)	No visible signs of weathering.		
Fresh Jointed (FJ)	Weathering limited to the surface of major discontinuities.		CLAYSTONE
Slightly Weathered (SW)	Penetrative weathering developed on open discontinuity surfaces, but only slight weathering of rock material.		SILTSTONE
Moderately Weathered (MW)	Weathering extends throughout the rock mass, but the rock material is not friable.		SANDSTONE
Highly Weathered (HW)	Weathering extends throughout the rock mass and the rock is partly friable.		COAL
Completely Weathered (CW)	Rock is wholly decomposed and in a friable condition, but the rock texture and structure are preserved.		Bedrock (general)

<u>DISCONTINUITY SPACING</u>		<u>STRENGTH CLASSIFICATION</u>			
Bedding	Bedding Plane Spacing	Rock Strength	Approximate Uniaxial Compressive Strength		Field Estimation of Hardness*
			(MPa)	(psi)	
Very thickly bedded	Greater than 2m	Extremely Strong	Greater than 250	Greater than 36,000	Specimen can only be chipped with a geological hammer
Thickly bedded	0.6 to 2m				
Medium bedded	0.2 to 0.6m	Very Strong	100-250	15,000 to 36,000	Requires many blows of geological hammer to break
Thinly bedded	60mm to 0.2m	Strong	50-100	7,500 to 15,000	Requires more than one blow of geological hammer to break
Very thinly bedded	20 to 60mm				
Laminated	6 to 20mm	Medium Strong	25.0 to 50.0	3,500 to 7,500	Breaks under single blow of geological hammer.
Thinly Laminated	Less than 6mm				

<u>TERMS</u>		Weak	5.0 to 25.0	750 to 3,500	Can be peeled by a pocket knife with difficulty
Total Core Recovery: (TCR)	Core recovered as a percentage of total core run length.				
Solid Core Recovery: (SCR)	Percent Ratio of solid core of full cylindrical shape recovered. Expressed with respect to the total length of core run.				
Rock Quality Designation: (RQD)	Total length of sound core recovered in pieces 0.1m in length or larger as a percentage of total core run length.				
Uniaxial Compressive Strength (UCS)	Axial stress required to break the specimen				
Fracture Index: (FI)	Frequency of natural fractures per 0.3m of core run.	Very Weak	1.0 to 5.0	150 to 750	Can be peeled by a pocket knife, crumbles under firm blows of geological pick.
		Extremely Weak (Rock)	0.25 to 1.0	35 to 150	Indented by thumbnail



Appendix A.

**Highway 7: Station 25+050 – 25+600 (08-120, 08-121, ML16 25+140, ML16 25+250,
ML16 25+300, ML16 25+350, ML16 25+400, SP16-04, ML16 25+550)**

RECORD OF BOREHOLE No 08-120

1 OF 2

METRIC

GWP# 408-88-00 LOCATION N 4 817 106.5 E 230 586.3 ORIGINATED BY LH
 DIST HWY 7 - New BOREHOLE TYPE Solid Stem Augers COMPILED BY AN
 DATUM Geodetic DATE 2009.01.14 - 2009.01.14 LATITUDE LONGITUDE CHECKED BY RPR

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa						
								20 40 60 80 100						
331.0	GROUND SURFACE													
0.0	TOPSOIL: (300mm)													
330.7			1	SS	18									
0.3	SAND , trace silt, trace clay Loose to Compact Brown Moist to Wet													
			2	SS	6									
			3	SS	19									
			4	SS	19									
328.0														
3.0	Silty CLAY , trace to some sand, trace gravel Very Stiff to Hard Brown Moist (TILL)		5	SS	18									
			6	SS	38									
324.7			7	SS	66									
6.3	Silty SAND to Sandy SILT , trace clay Very Dense Brown to Grey Moist to Wet (TILL)													
			8	SS	23									
			9	SS	52									
321.2														
9.8	END OF BOREHOLE AT 9.8m.													

Continued Next Page

+³, ×³: Numbers refer to
Sensitivity

20
15
10
(%) STRAIN AT FAILURE

METRIC

[illegible]

RECORD OF BOREHOLE No 08-121

1 OF 1

METRIC

GWP# 408-88-00 LOCATION N 4 817 138.7 E 230 680.9 ORIGINATED BY LH
DIST HWY 7 - New BOREHOLE TYPE Solid Stem Augers COMPILED BY AN
DATUM Geodetic DATE 2009.01.14 - 2009.01.14 LATITUDE LONGITUDE CHECKED BY RPR

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa						
								20 40 60 80 100						
								○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL x LAB VANE						
							WATER CONTENT (%) 20 40 60							
330.0	GROUND SURFACE													
0.0	TOPSOIL: (450mm)													
329.5														
0.5	Sandy SILT , trace clay, occasional organics Loose to Compact Dark Brown Moist to Wet		1	SS	10/ 0.150									
			2	SS	23		329							
328.5														
1.5	Silty SAND to Sandy SILT , trace clay Compact to Very Dese Brown Moist to Wet (TILL)		3	SS	35		328							0 42 49 9
			4	SS	69									
			5	SS	63		327							
			6	SS	42		326							
			7	SS	26		325							0 62 35 3
							324							
							323							
			8	SS	100/ 0.225									
321.9							322							
8.1	END OF BOREHOLE AT 8.1m. WATER LEVEL AT 6.1m UPON COMPLETION OF DRILLING. BOREHOLE BACKFILLED WITH BENTONITE AND CUTTINGS TO SURFACE.													

ONTMT452 2020LIBRARY(MTO) - COPY.GLB MTO-11375(GINTDATA).GPJ 2/22/24

RECORD OF BOREHOLE No ML16 25+140

1 OF 2

METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 817 151.0 E 230 632.0 ORIGINATED BY GA
DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MFA
DATUM Geodetic DATE 2017.05.11 - 2017.05.11 LATITUDE 43.490599 LONGITUDE -80.416998 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT				PLASTIC LIMIT			NATURAL MOISTURE CONTENT			LIQUID LIMIT			UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)				
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa				W P			W			W L				GR	SA	SI	CL	
								○ UNCONFINED	+ FIELD VANE	● QUICK TRIAXIAL	× LAB VANE	WATER CONTENT (%)														
331.9	GROUND SURFACE						20	40	60	80	100															
0.0	TOPSOIL: (50mm) Sandy SILT , trace clay, trace organics Loose to Compact Dark Brown to Brown Moist		1	SS	4																					
			2	SS	10																					
			3	SS	24																					
			4	SS	22																					
			5	SS	14																					
			6	SS	9																					
			7	SS	19																					
324.9																										
7.0	Silty CLAY , some sand, trace gravel Very Stiff Brown Moist (TILL)		8	SS	24																					
323.2																										
8.7	Sandy SILT , trace clay Very Dense Brown Wet (TILL)		9	SS	52																					

Continued Next Page

+³, ×³: Numbers refer to
Sensitivity

20
15
10
(%) STRAIN AT FAILURE

RECORD OF BOREHOLE No ML16 25+140

2 OF 2

METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 817 151.0 E 230 632.0 ORIGINATED BY GA
 DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MFA
 DATUM Geodetic DATE 2017.05.11 - 2017.05.11 LATITUDE 43.490599 LONGITUDE -80.416998 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT				PLASTIC LIMIT NATURAL MOISTURE CONTENT LIQUID LIMIT			UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa				WATER CONTENT (%)				
								20 40 60 80 100	○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL × LAB VANE			W P W W L				
	Continued From Previous Page															
	Sandy SILT , trace clay Very Dense Brown Wet (TILL)		10	SS	100/ .275		321									
							320									
			11	SS	100/ .275											
							319									
			12	SS	64		318									
317.6																
14.3	END OF BOREHOLE AT 14.3m. WATER LEVEL AT 8.5m UPON COMPLETION. BOREHOLE BACKFILLED WITH BENTONITE HOLEPLUG AND AUGER CUTTINGS TO SURFACE.															

+³, ×³: Numbers refer to
Sensitivity

20
15
10

(%) STRAIN AT FAILURE

RECORD OF BOREHOLE No ML16 25+250

1 OF 2

METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 817 195.0 E 230 730.5 ORIGINATED BY SB
 DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MP
 DATUM Geodetic DATE 2018.01.31 - 2018.01.31 LATITUDE 43.491005 LONGITUDE -80.415786 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT				UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa					
329.3	GROUND SURFACE												
0.0	TOPSOIL: (350mm)												
328.9			1	SS	7		329						
0.4	Sandy SILT , some clay, trace gravel Loose to Compact Brown Moist (TILL)												
			2	SS	11		328						
			3	SS	12		327						8 38 39 15
			4	SS	22		326						
			5	SS	15		325						
			6	SS	12		324						
			7	SS	10		323						
			8	SS	23		322						
322.1													
7.2	Silty CLAY , trace sand Hard Grey Moist						322						
			9	SS	40		321						0 9 46 45
320.6													
8.7	SAND , some silt, trace clay Dense to Very Dense Brown Wet												
			10	SS	39		320						

Continued Next Page

+³, ×³: Numbers refer to Sensitivity
 20
 15
 10
 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No ML16 25+250

2 OF 2

METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 817 195.0 E 230 730.5 ORIGINATED BY SB
 DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MP
 DATUM Geodetic DATE 2018.01.31 - 2018.01.31 LATITUDE 43.491005 LONGITUDE -80.415786 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT	NATURAL MOISTURE CONTENT	LIQUID LIMIT	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa									
						20 40 60 80 100 ○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL × LAB VANE 20 40 60 80 100					WATER CONTENT (%)						
											W _p	W	W _L				
318.0	Continued From Previous Page SAND , some silt, trace clay Dense to Very Dense Brown Wet		11	SS	56		319										
11.3	END OF BOREHOLE AT 11.3m. WATER LEVEL AT 4.9m UPON COMPLETION. Piezometer installation consists of 25mm diameter Schedule 40 PVC pipe with a 3.05m slotted screen. WATER LEVEL READINGS DATE DEPTH(m) ELEV.(m) 2018.04.30 5.6 323.7						348										

ONTMT452 2020LIBRARY(MTO) - COPY.GLB MTO-11375(GINTDATA).GPJ 2/22/24

RECORD OF BOREHOLE No ML16 25+300

1 OF 2

METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 817 217.3 E 230 771.7 ORIGINATED BY SB
 DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MP
 DATUM Geodetic DATE 2018.01.31 - 2018.01.31 LATITUDE 43.491209 LONGITUDE -80.415280 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT			UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa				
								20 40 60 80 100				
329.1	GROUND SURFACE											
0.0	TOPSOIL: (350mm)		1	SS	8		329					
328.8												
0.4	SAND, some silt, trace gravel Loose to Compact Brown Moist		2	SS	21		328					
327.7												
1.4	Silty CLAY, some sand Firm to Hard Brown to Grey Moist		3	SS	32		327					
			4	SS	29							
			5	SS	22		326					
			6	SS	12		325					
							324					
			7	SS	6		323					
321.9							322					
7.2	Silty SAND, trace clay, trace gravel Compact to Dense Brown Wet (TILL)		8	SS	17		321					
			9	SS	33		320					

Continued Next Page

+³, ×³: Numbers refer to Sensitivity
 20
 15 10 5 0
 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No ML16 25+300

2 OF 2

METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 817 217.3 E 230 771.7 ORIGINATED BY SB
DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MP
DATUM Geodetic DATE 2018.01.31 - 2018.01.31 LATITUDE 43.491209 LONGITUDE -80.415280 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT				PLASTIC LIMIT	NATURAL MOISTURE CONTENT	LIQUID LIMIT	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa								
	Continued From Previous Page															
	Silty SAND , trace clay, trace gravel Compact to Dense Brown Wet (TILL)		10	SS	18		319									
317.8							318									0 68 30 2
11.3	END OF BOREHOLE AT 11.3m. WATER LEVEL AT 7.3m UPON COMPLETION. BOREHOLE BACKFILLED WITH BENTONITE HOLEPLUG AND AUGER CUTTINGS TO SURFACE.															



































ONTMT452 2020LIBRARY(MTO) - COPY.GLB MTO-11375(GINTDATA).GPJ 2/22/24

RECORD OF BOREHOLE No ML16 25+350

1 OF 2

METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 817 242.9 E 230 812.7 ORIGINATED BY SB
 DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MP
 DATUM Geodetic DATE 2018.02.01 - 2018.02.01 LATITUDE 43.491444 LONGITUDE -80.414777 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT				PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)				
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa												
328.0	GROUND SURFACE							20	40	60	80	100								
0.0	TOPSOIL: (375mm)		1	SS	6															
327.6	Sandy SILT , some clay, trace gravel, trace organics Loose to Compact Brown Moist																			
0.4			2	SS	17															
			3	SS	15															
325.8	Silty CLAY , trace sand Stiff to Very Stiff Brown to Grey Moist																			
2.2			4	SS	22															
																				
				5	SS		24													
																				
				6	SS	18														
																				
			7	SS	14															
																				
																				
			8	SS	14															
																				
																				
																				
																				
																				
																				
																				
																				
																				
																				
																				
																				
																				
																				
																				
																				
																				
																				
																				
																				
																				
																				
																				
																				

Continued Next Page


+³, ×³: Numbers refer to
Sensitivity

20
15
10

(%) STRAIN AT FAILURE

2 OF 2

METRIC

SOIL PROFILE					
ELEV DEPTH	DESCRIPTION	STRAT PLOT	SAMPLES	GROUND WATER CONDITIONS	ELEVATION SCALE
	Continued From Previous Page		NUMBER TYPE "N" VALUES		DYNAMIC CONE PENETRATION RESISTANCE PLOT  SHEAR STRENGTH kPa ○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL x LAB VANE WATER CONTENT (%) PLASTIC LIMIT NATURAL MOISTURE CONTENT LIQUID LIMIT w p w w L UNIT WEIGHT γ kN/m³
	WATER LEVEL AT 2.4m UPON COMPLETION. BOREHOLE BACKFILLED WITH BENTONITE HOLEPLUG AND CUTTINGS TO SURFACE.				

RECORD OF BOREHOLE No ML16 25+400

1 OF 2

METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 817 248.4 E 230 871.3 ORIGINATED BY SB
DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MP
DATUM Geodetic DATE 2018.02.01 - 2018.02.01 LATITUDE 43.491500 LONGITUDE -80.414053 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT				UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa					
								20 40 60 80 100		PLASTIC LIMIT NATURAL MOISTURE CONTENT LIQUID LIMIT			
327.3	GROUND SURFACE												
0.0	TOPSOIL: (450mm)		1	SS	4		327						
326.8													
0.5	Sandy SILT, some clay Loose Brown Moist		2	SS	8		326						0 41 45 14
325.7													
1.5	Silty CLAY, trace sand Very Stiff Brown to Grey Moist		3	SS	21		325						
			4	SS	20								
			5	SS	23		324						0 0 36 64
							323						
			6	SS	17		322						
			7	SS	18		321						
							320						No recovery
			8	SS	30		319						
			9	SS	24								
318.2													
9.1	SILT, trace clay, trace sand Dense Grey Wet		10	SS	39		318						0 3 90 7
317.5													
9.8	END OF BOREHOLE AT 9.8m.												

Continued Next Page

+³, ×³: Numbers refer to Sensitivity
20
15
10
(%) STRAIN AT FAILURE

2 OF 2

METRIC

[illegible]

RECORD OF BOREHOLE No ML16 25+550

1 OF 1

METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 817 333.3 E 230 990.6 ORIGINATED BY SB
 DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MP
 DATUM Geodetic DATE 2018.02.02 - 2018.02.02 LATITUDE 43.492276 LONGITUDE -80.412589 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa						
								20 40 60 80 100						
								○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL × LAB VANE						
							PLASTIC LIMIT NATURAL MOISTURE CONTENT LIQUID LIMIT			WATER CONTENT (%)				
							W P W W L							
325.5	GROUND SURFACE													
0.0	TOPSOIL: (500mm)		1	SS	7									
325.0														
0.5	Silty SAND , some gravel, trace clay Loose to Very Dense Brown Moist		2	SS	4									
			3	SS	24									
	Grinding from 2.4m to 2.5m		4	SS	100/ 0.100									
322.1			5	SS	18									
3.4	Silty CLAY , some sand trace gravel Very Stiff Grey Moist													
			6	SS	17									
319.8														
5.6	Sandy SILT , trace clay, trace gravel, occasional cobbles Compact to Very Dense Grey Wet (TILL)		7	SS	60									
			8	SS	26									
317.3														
8.2	END OF BOREHOLE AT 8.2m. WATER LEVEL AT 5.0m UPON COMPLETION. BOREHOLE BACKFILLED WITH BENTONITE HOLEPLUG AND CUTTINGS TO SURFACE.													

ONTMT452 2020LIBRARY(MTO) - COPY.GLB MTO-11375(GINTDATA).GPJ 2/22/24

RECORD OF BOREHOLE No SP16-04

1 OF 3

METRIC

GWP# 408-88-00 LOCATION Spitzig Road, MTM NAD 83 Zone 10: N 4 817 293.2 E 230 924.7 ORIGINATED BY GA
 DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MFA
 DATUM Geodetic DATE 2017.05.25 - 2017.05.25 LATITUDE 43.491908 LONGITUDE -80.413398 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)					
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa											
327.0	GROUND SURFACE							20	40	60	80	100							
0.0	TOPSOIL: (75mm)																		
0.1	Sandy SILT , some clay, trace gravel, trace organics		1	SS	7														
326.3	Loose Brown																		
0.7	Moist Silty CLAY , trace sand Very Stiff to Hard Brown to Grey Moist		2	SS	60		326												
			3	SS	33		325												
			4	SS	60		324												
			5	SS	23		323												
			6	SS	21		322												
							321												
			7	SS	17		320												
319.8																			
7.2	Sandy SILT , trace to some clay, trace gravel Dense to Very Dense Brown to Grey Wet (TILL)		8	SS	66		319												
			9	SS	100/ .250		318												

Continued Next Page

+³, ×³: Numbers refer to
Sensitivity

20
15
10

(%) STRAIN AT FAILURE

RECORD OF BOREHOLE No SP16-04

2 OF 3

METRIC

GWP# 408-88-00 LOCATION Spitzig Road, MTM NAD 83 Zone 10: N 4 817 293.2 E 230 924.7 ORIGINATED BY GA
 DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MFA
 DATUM Geodetic DATE 2017.05.25 - 2017.05.25 LATITUDE 43.491908 LONGITUDE -80.413398 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT				PLASTIC LIMIT	NATURAL MOISTURE CONTENT	LIQUID LIMIT	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)			
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa				W _p	W	W _L			WATER CONTENT (%)	GR	SA
	Continued From Previous Page							20	40	60	80	100							
	Sandy SILT , trace to some clay, trace gravel Dense to Very Dense Brown to Grey Wet (TILL)		10	SS	100/ .250														
							316												0 23 73 4
							315												
			11	SS	44														
							314												
			12	SS	40		313												
							312												
			13	SS	100/ .100														
							311												
			14	SS	100/ .125		310												
							309												
			15	SS	100/ .100														5 26 53 16
308.1																			
18.9	END OF BOREHOLE AT 18.9m. WATER LEVEL AT 7.6m UPON COMPLETION. Piezometer installation consists of 25mm diameter Schedule 40 PVC pipe with a 3.0m slotted screen.																		

Continued Next Page

+³, ×³: Numbers refer to
Sensitivity

20
15
10

(%) STRAIN AT FAILURE

ONTMT4S2 2020LIBRARY(MTO) - COPY.GLB MTO-11375(GINTDATA).GPJ 2/22/24

METRIC

[illegible]

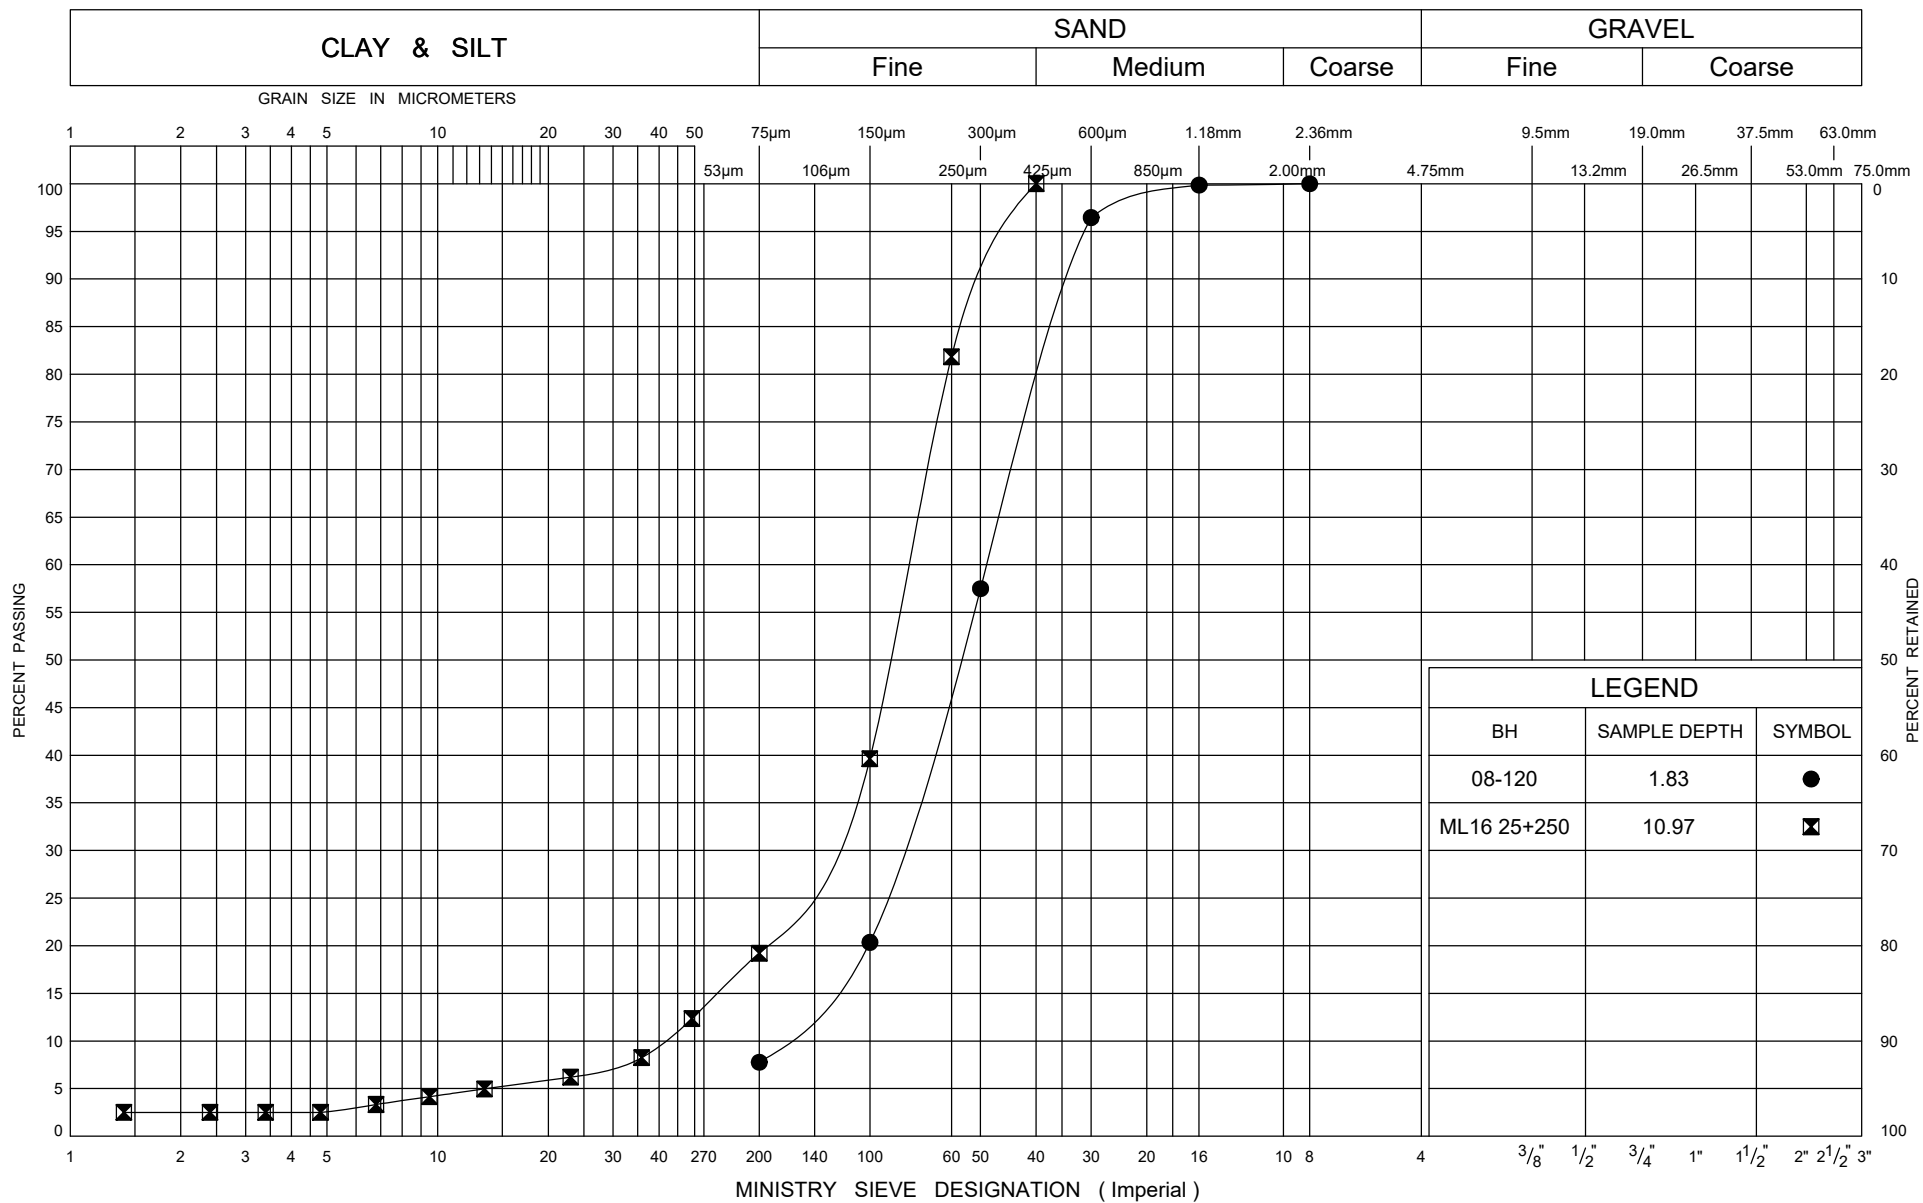
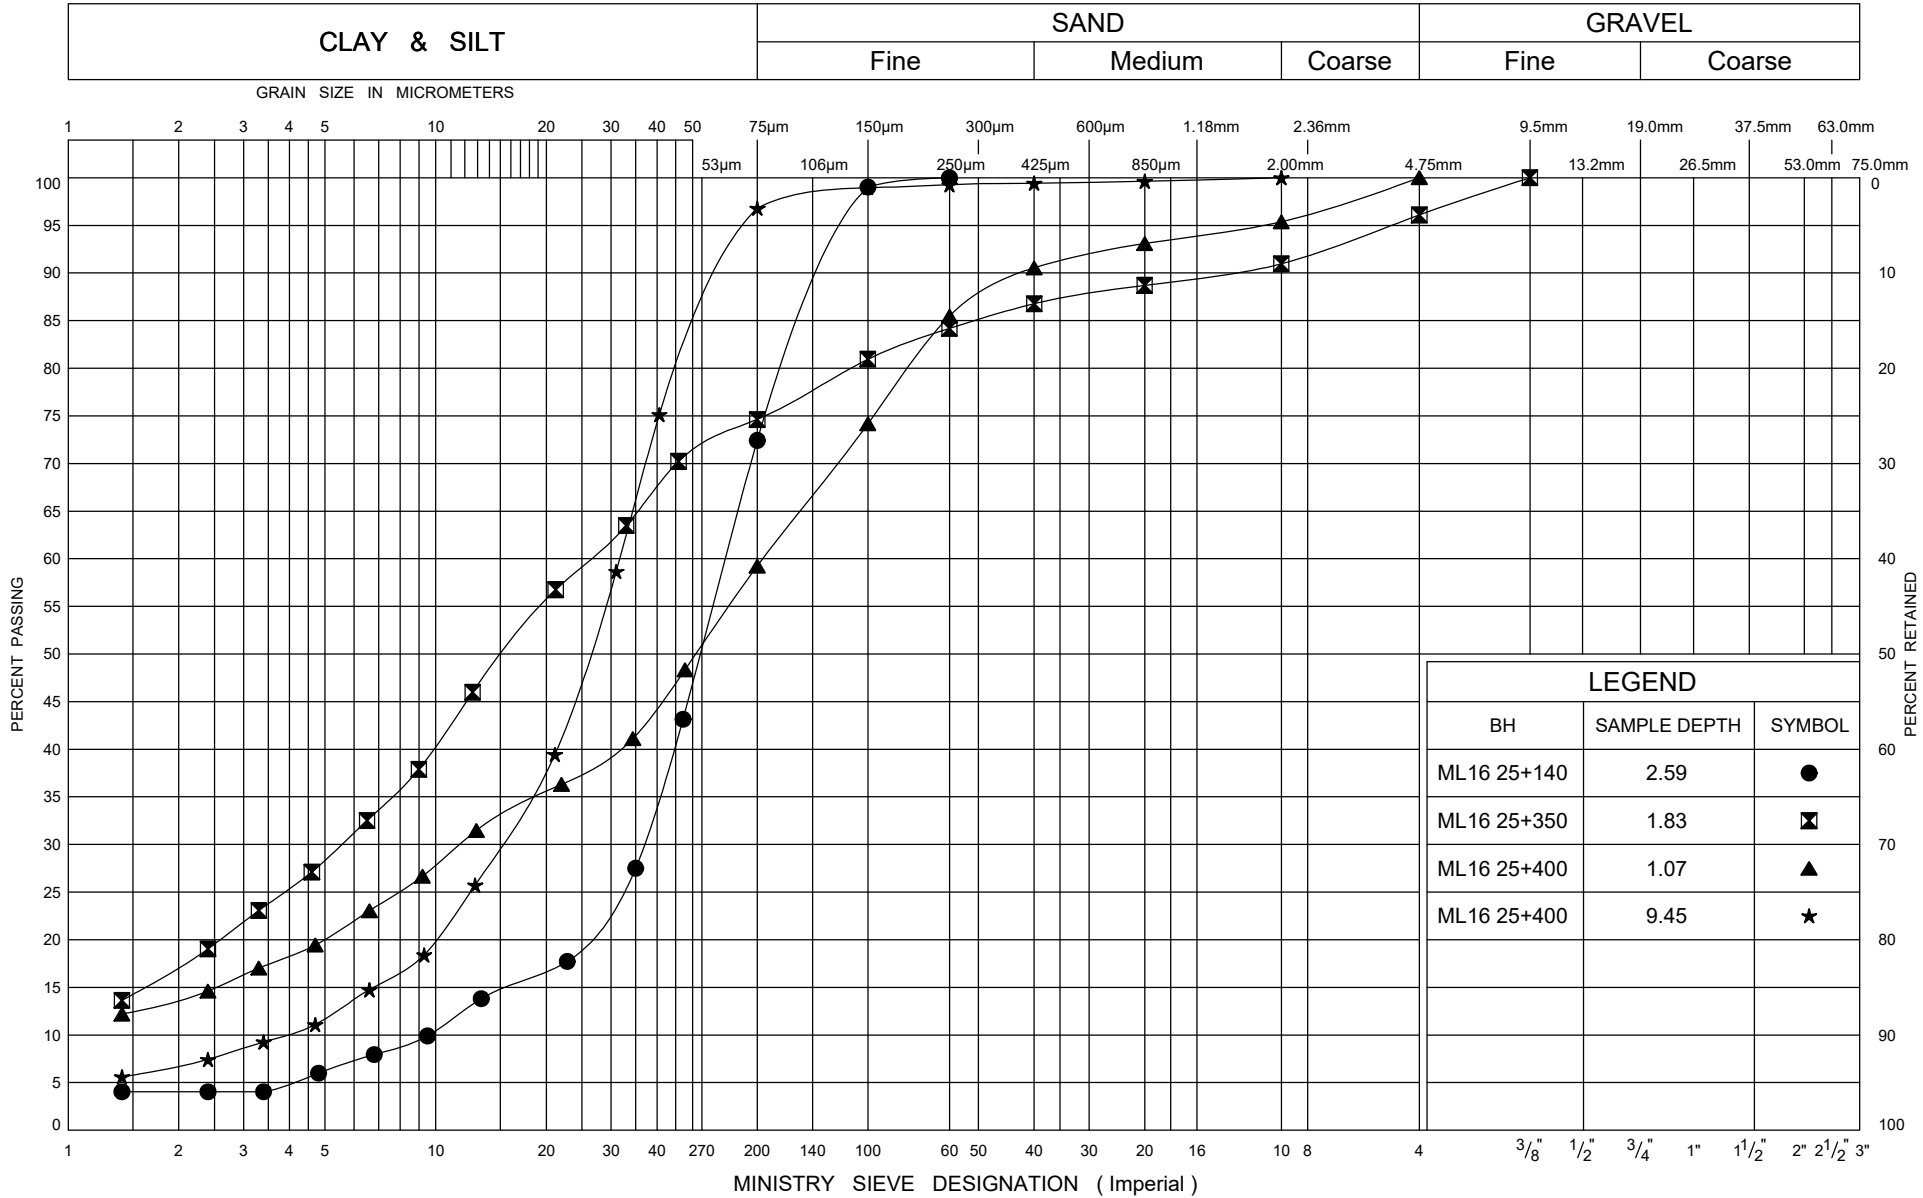
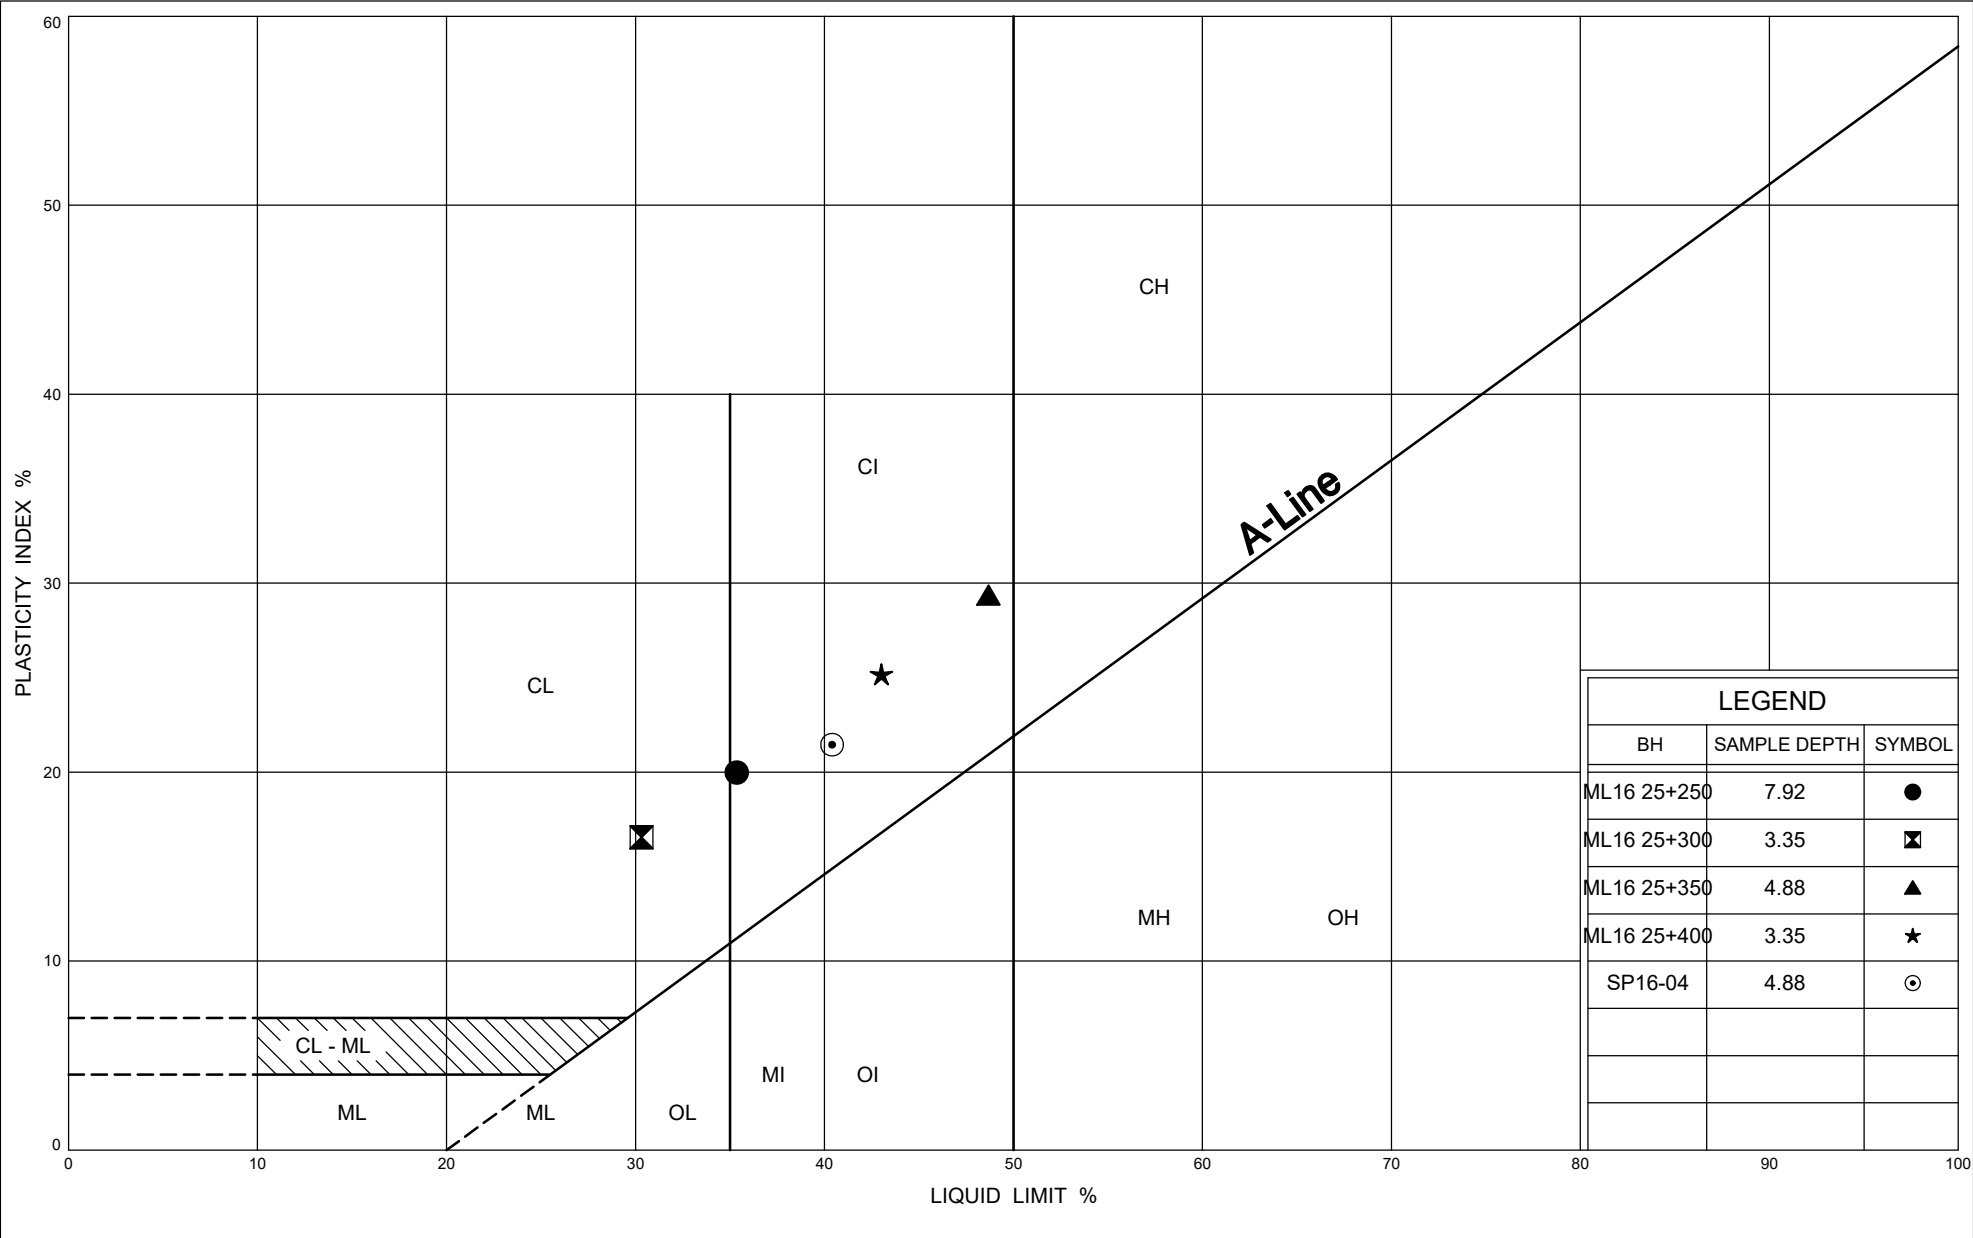


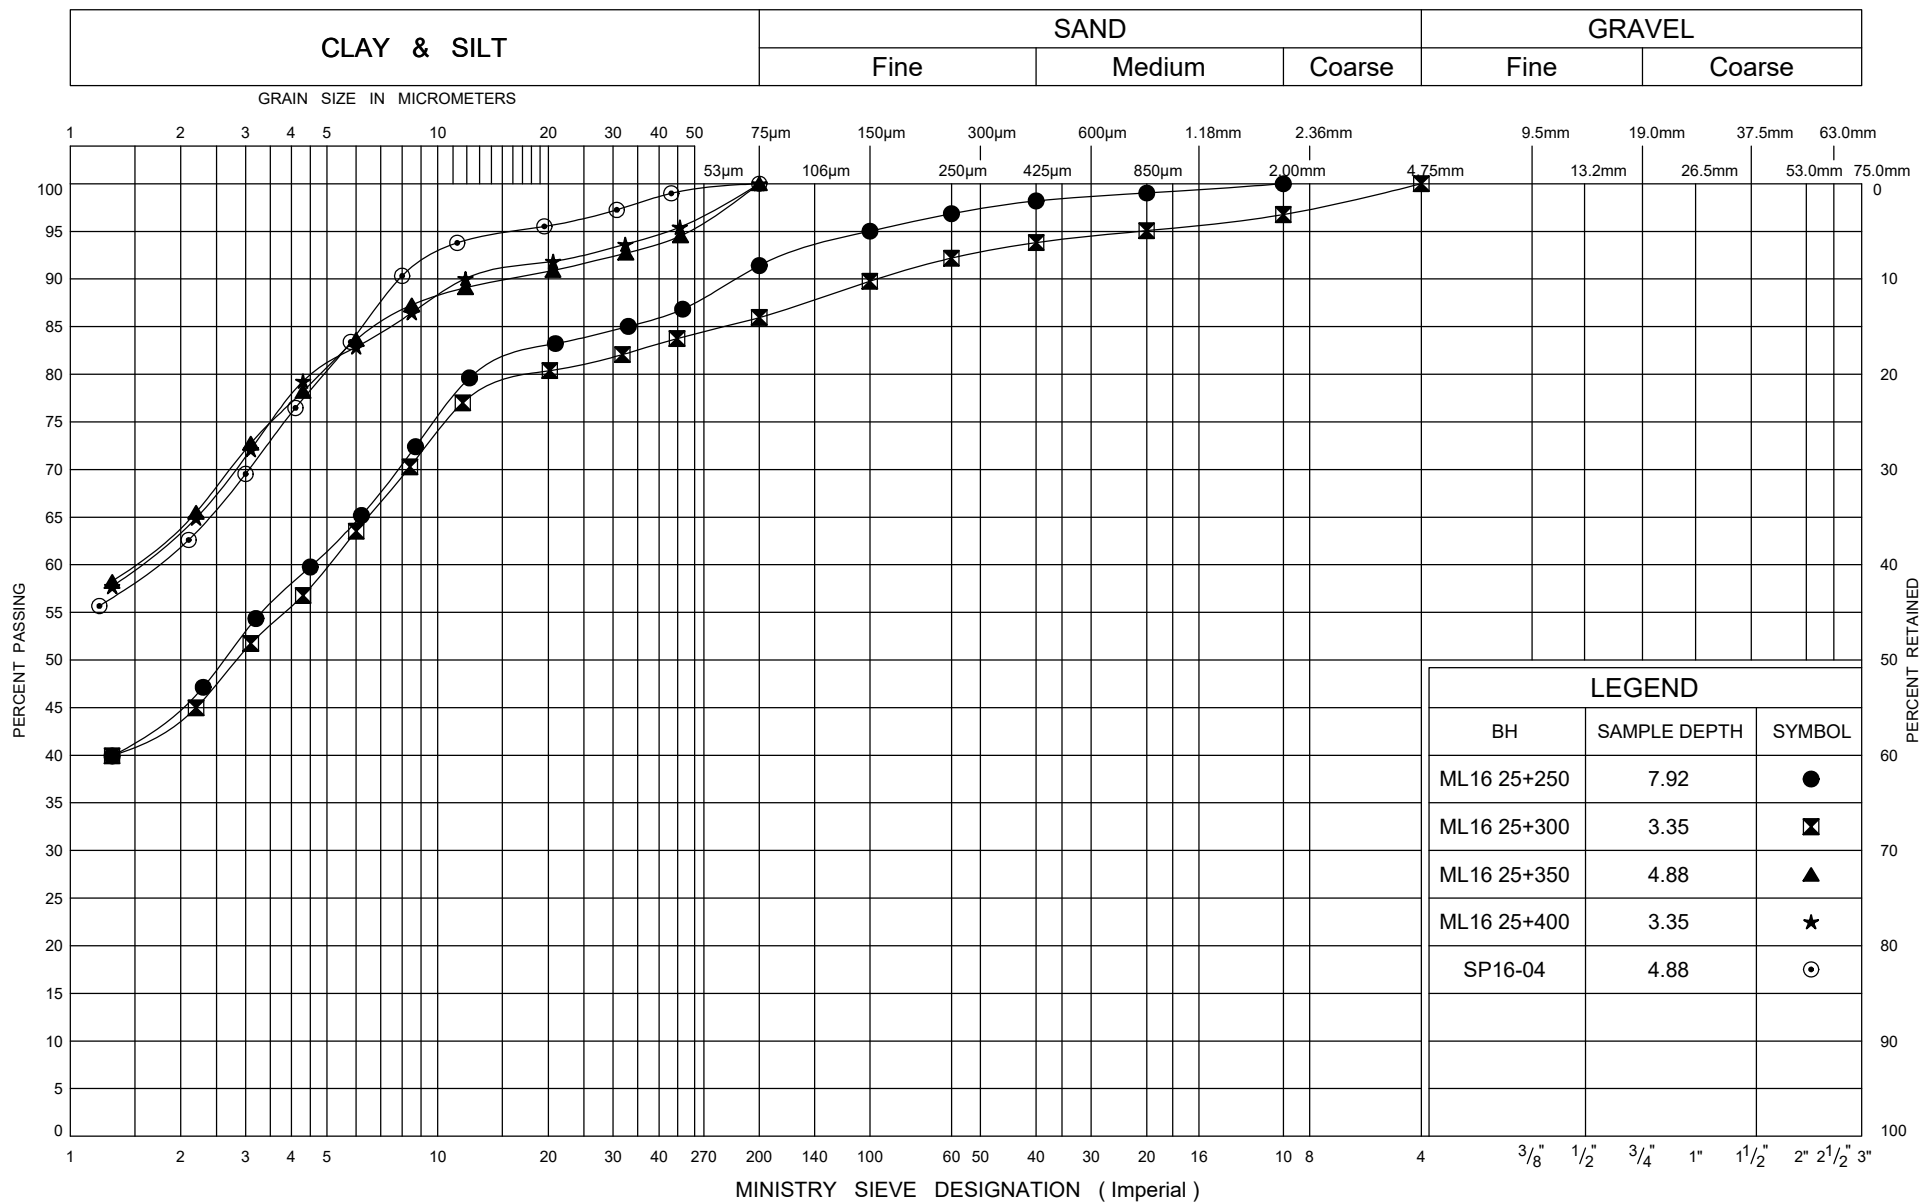



FIG No A2
GWP 408-88-00

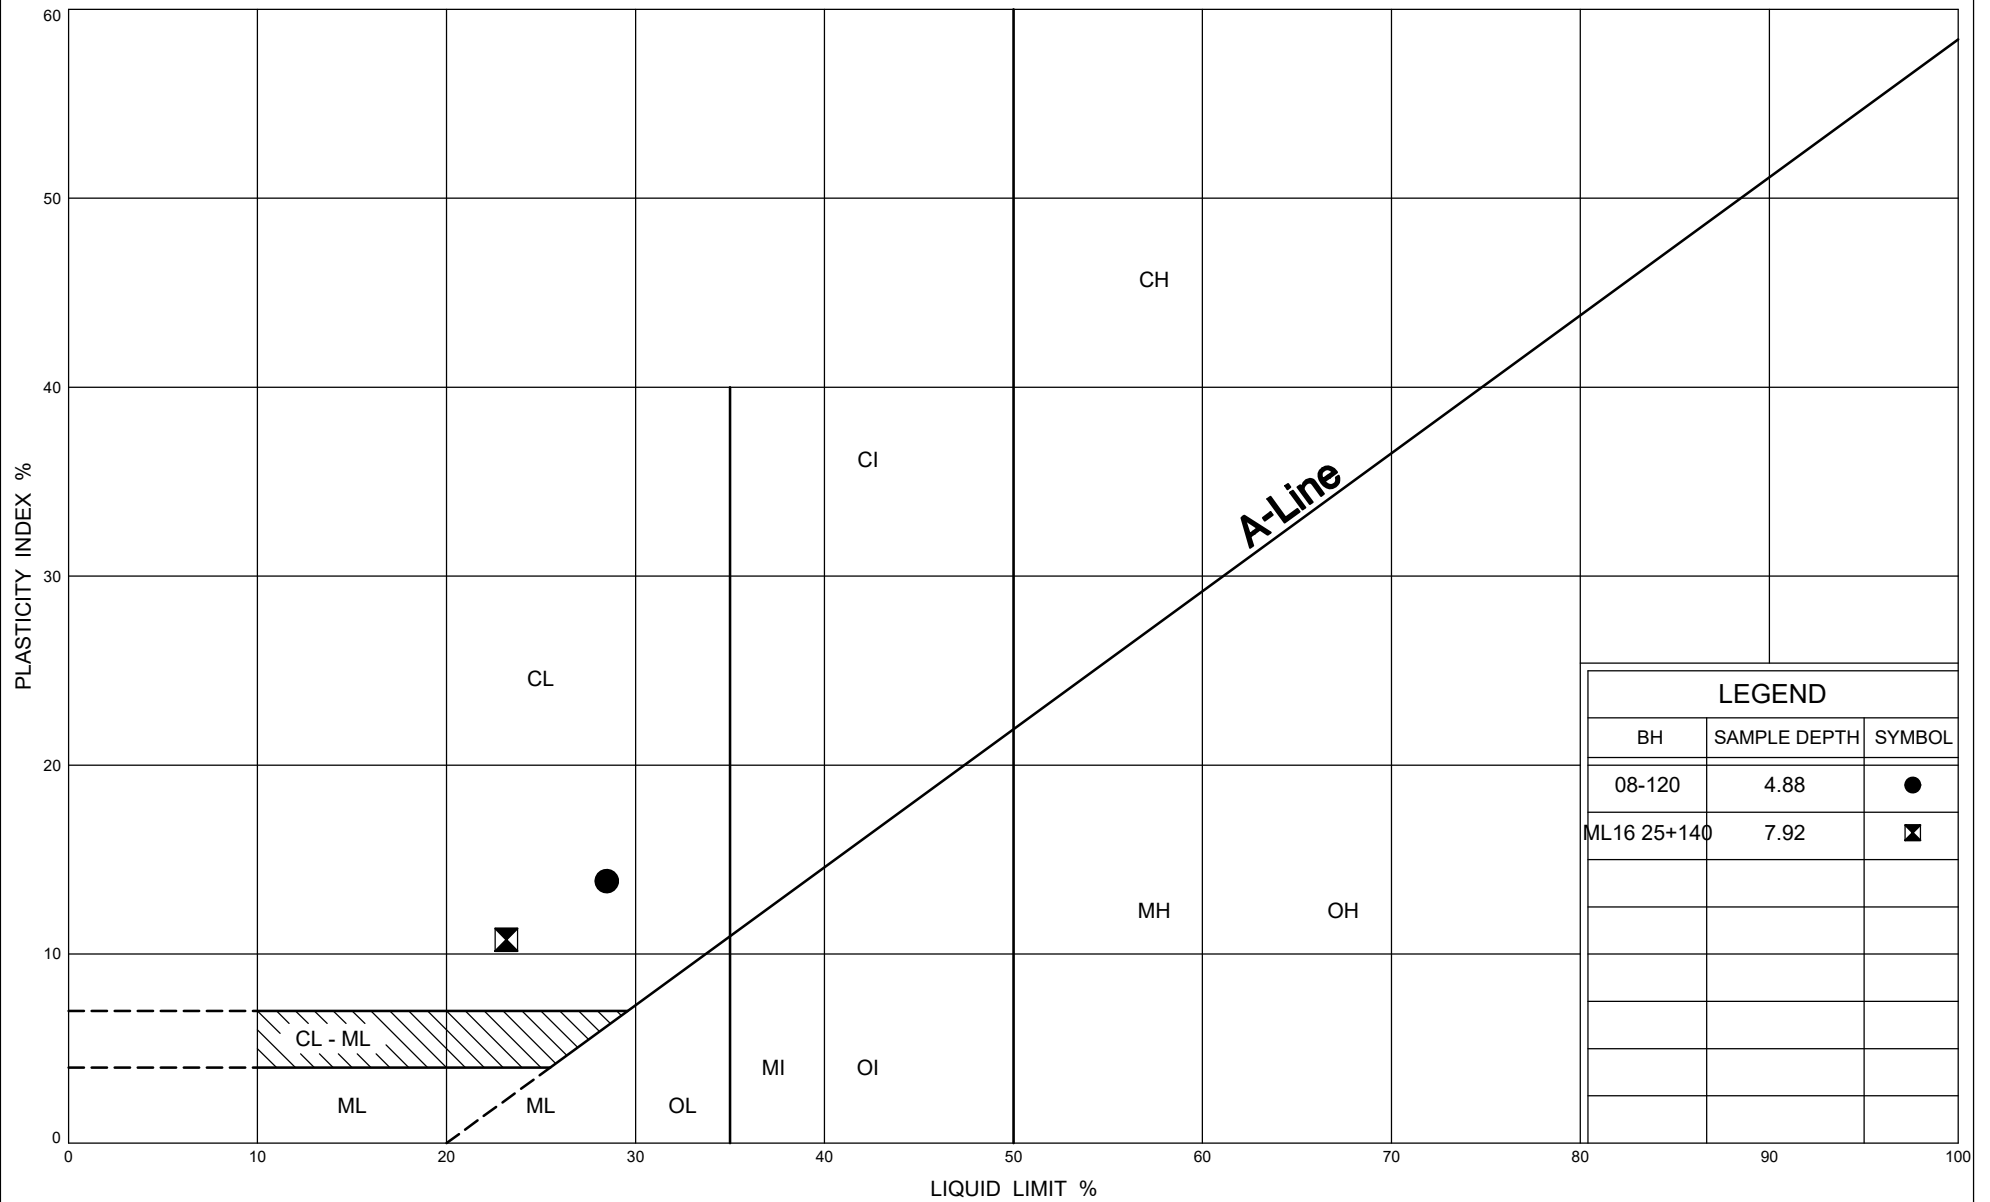ONTARIO MOT GRAIN SIZE 3 MTO-11375(GINTDATA)\GPJ_ONTARIO MOT.GDT 6/23/20









PLASTICITY CHART Silty CLAY TILL

FIG No A6


GWP 408-88-00




Ministry of
Transportation


Ontario

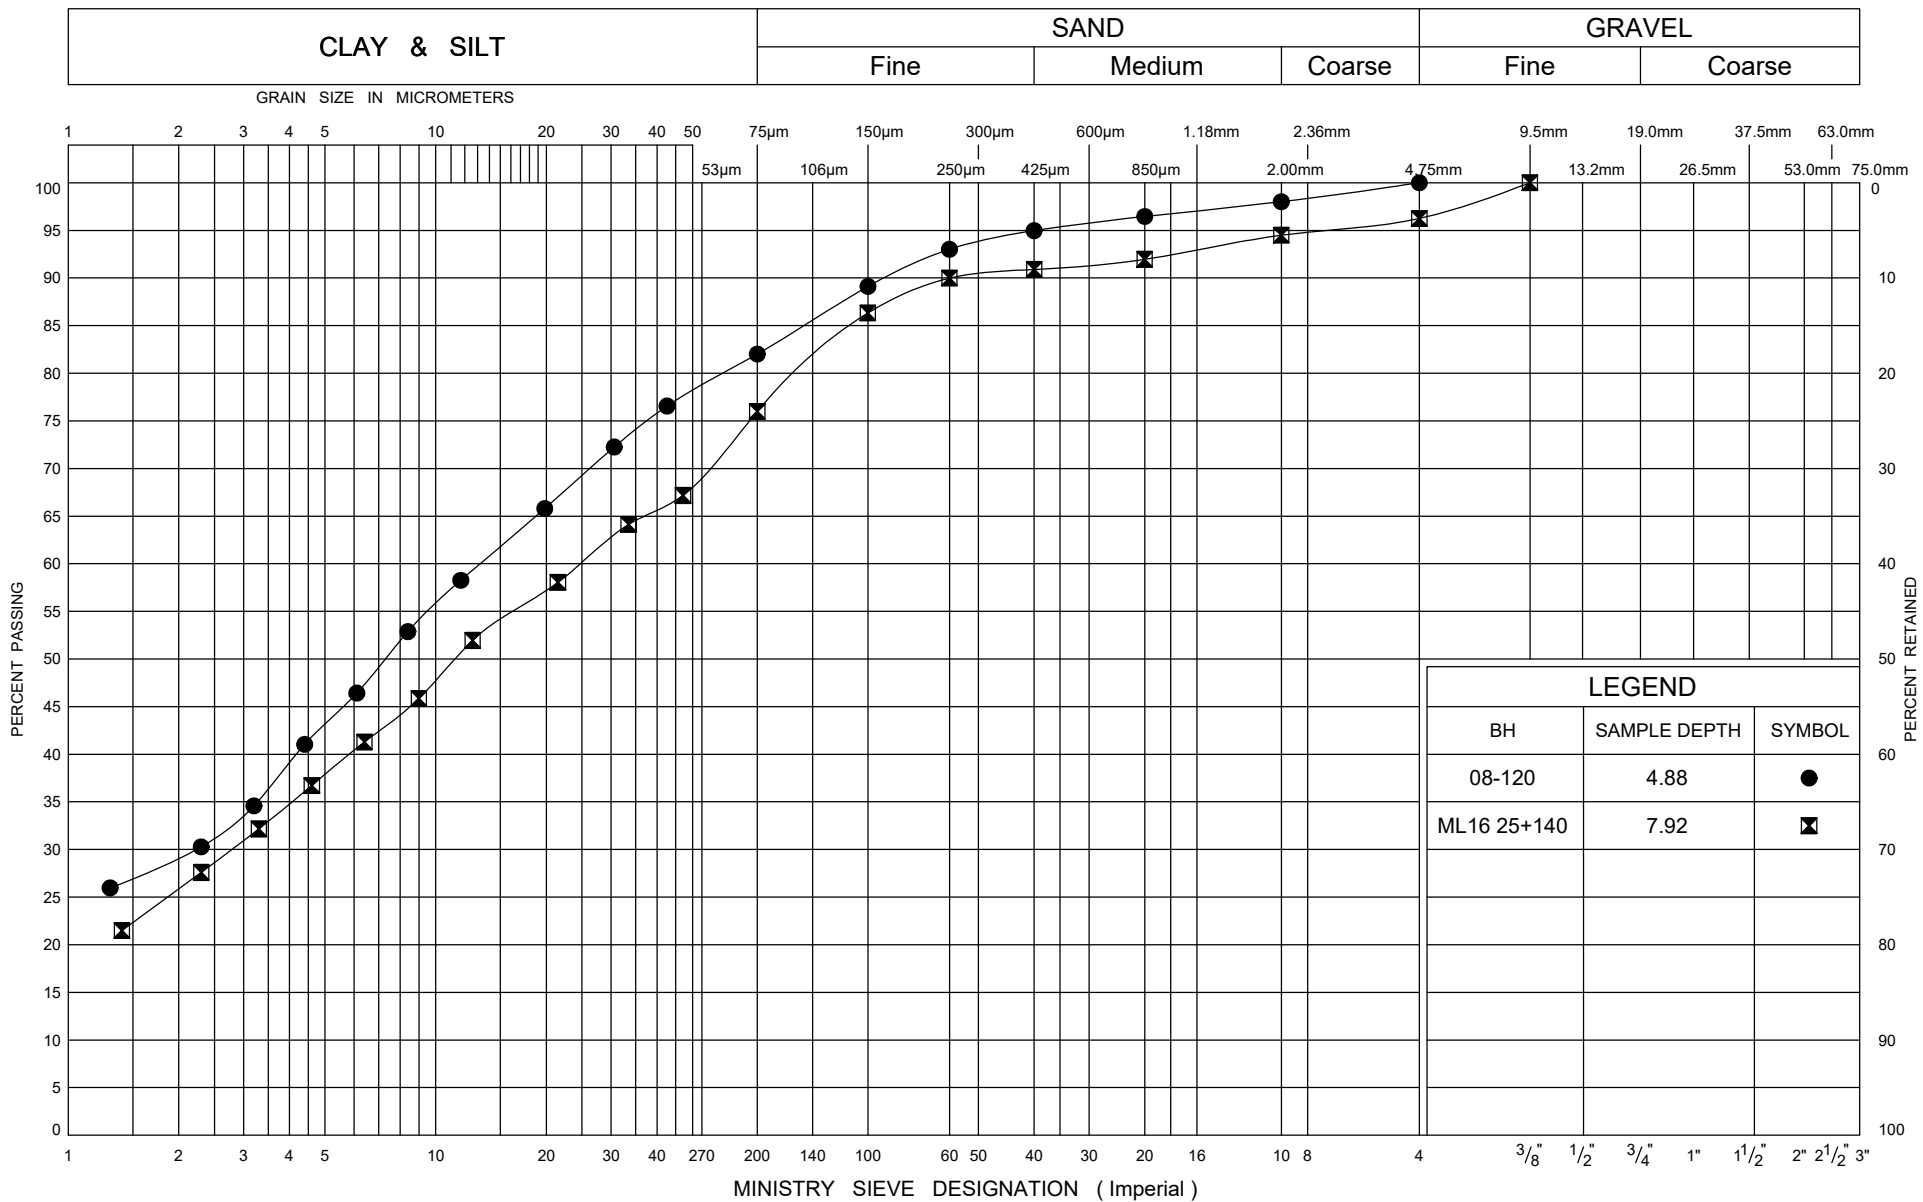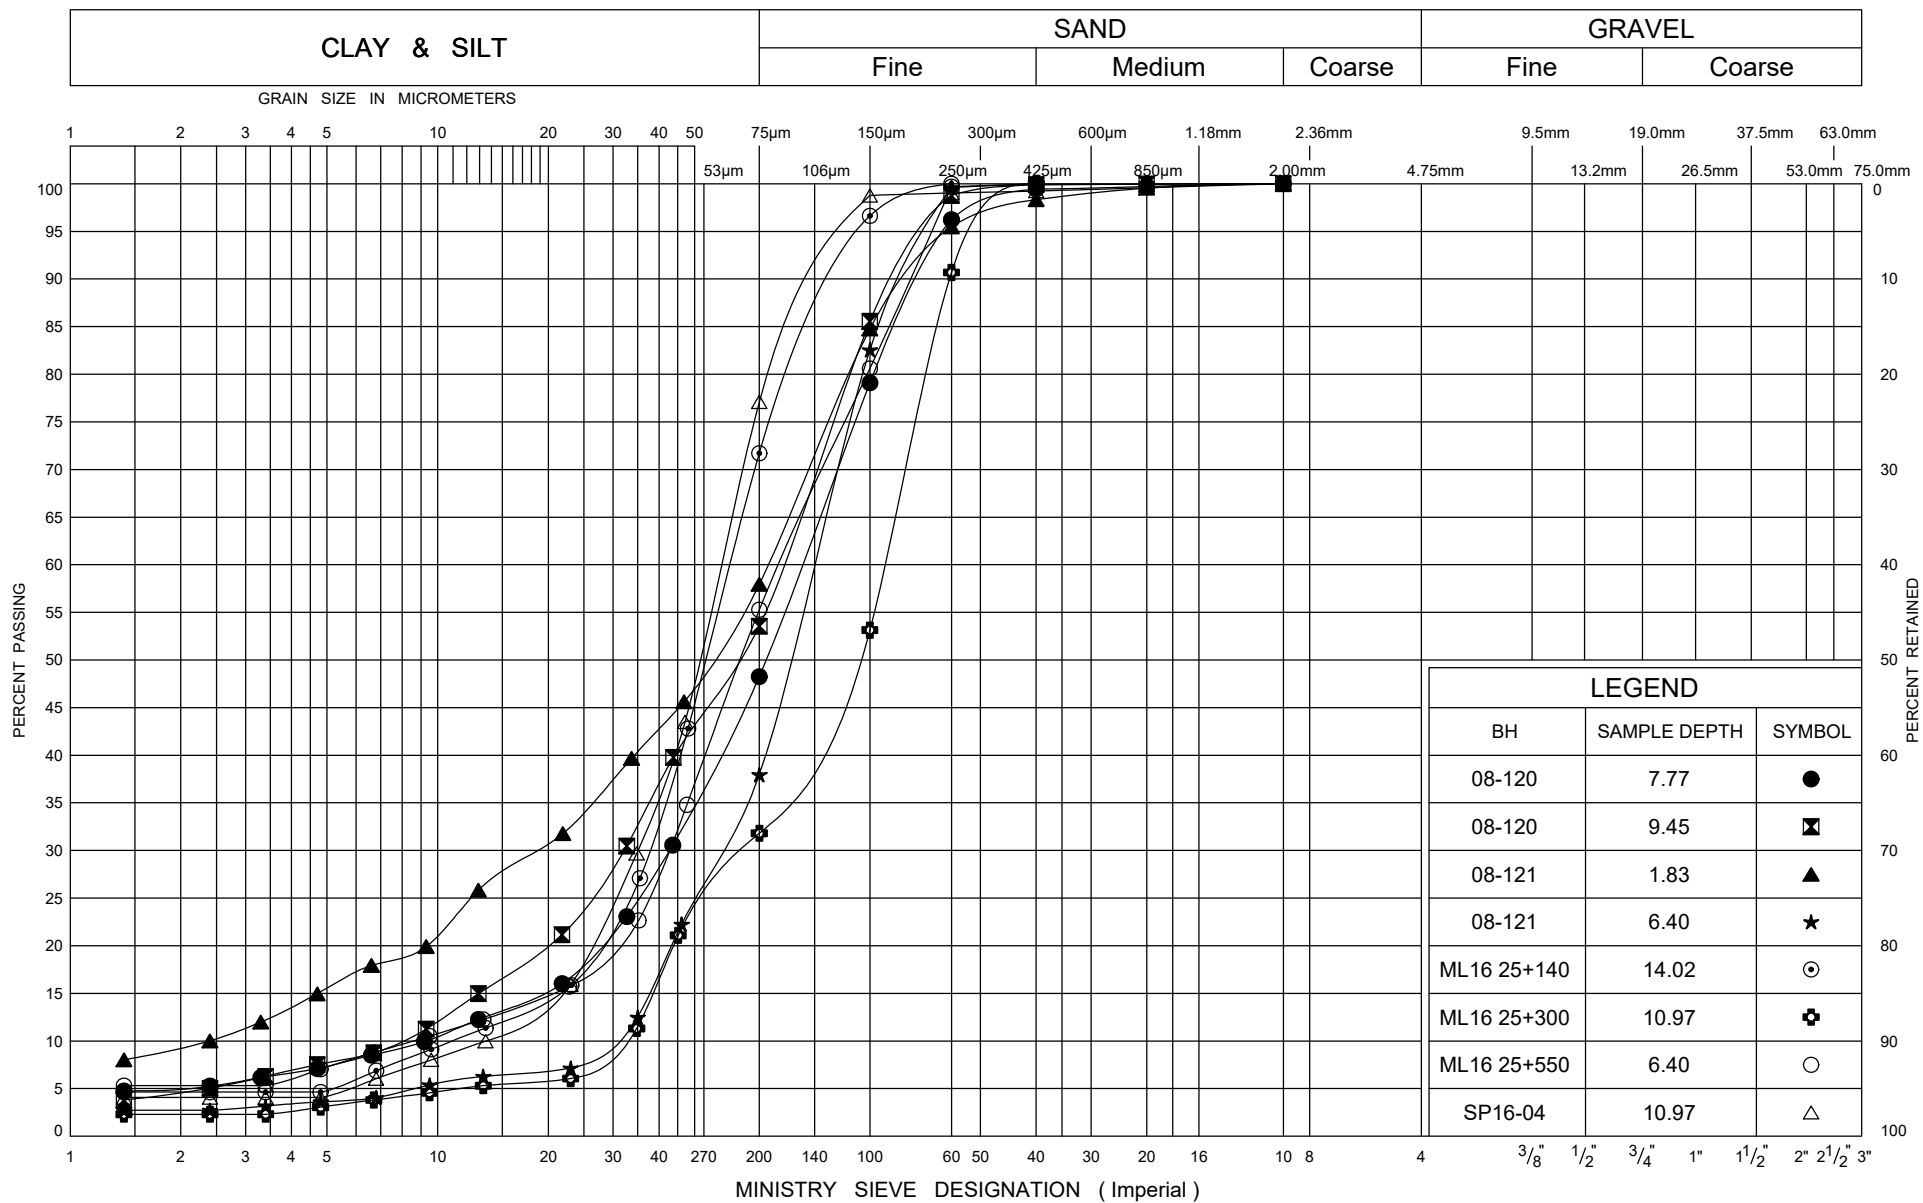ONTARIO MOT GRAIN SIZE 3 MTO-11375(GINTDATA)\GPJ_ONTARIO MOT.GDT 7/18/23






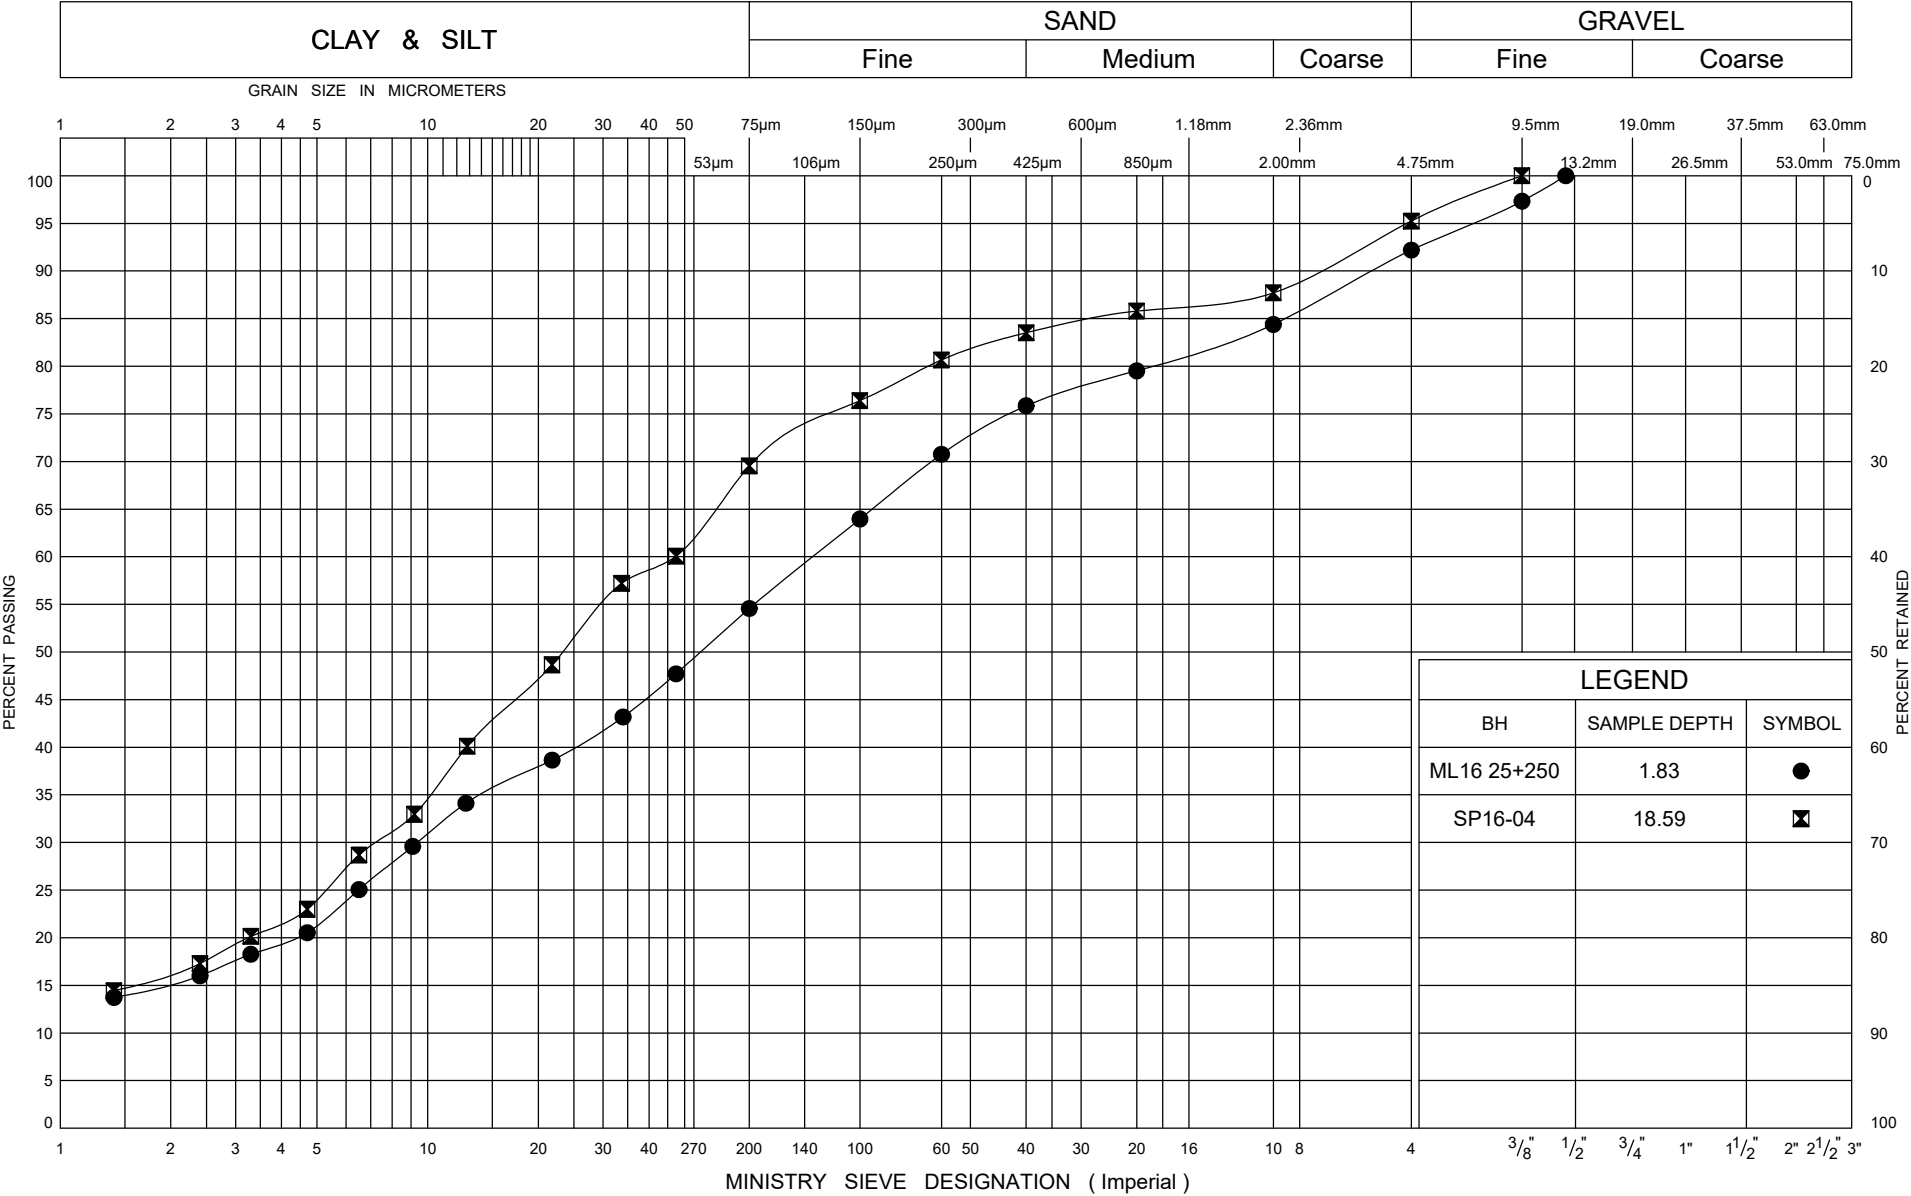ONTARIO MOT GRAIN SIZE 3 MTO-11375(GINTDATA)\GPJ_ONTARIO MOT.GDT 7/18/23





GRAIN SIZE DISTRIBUTION
Silty SAND to Sandy SILT TILL

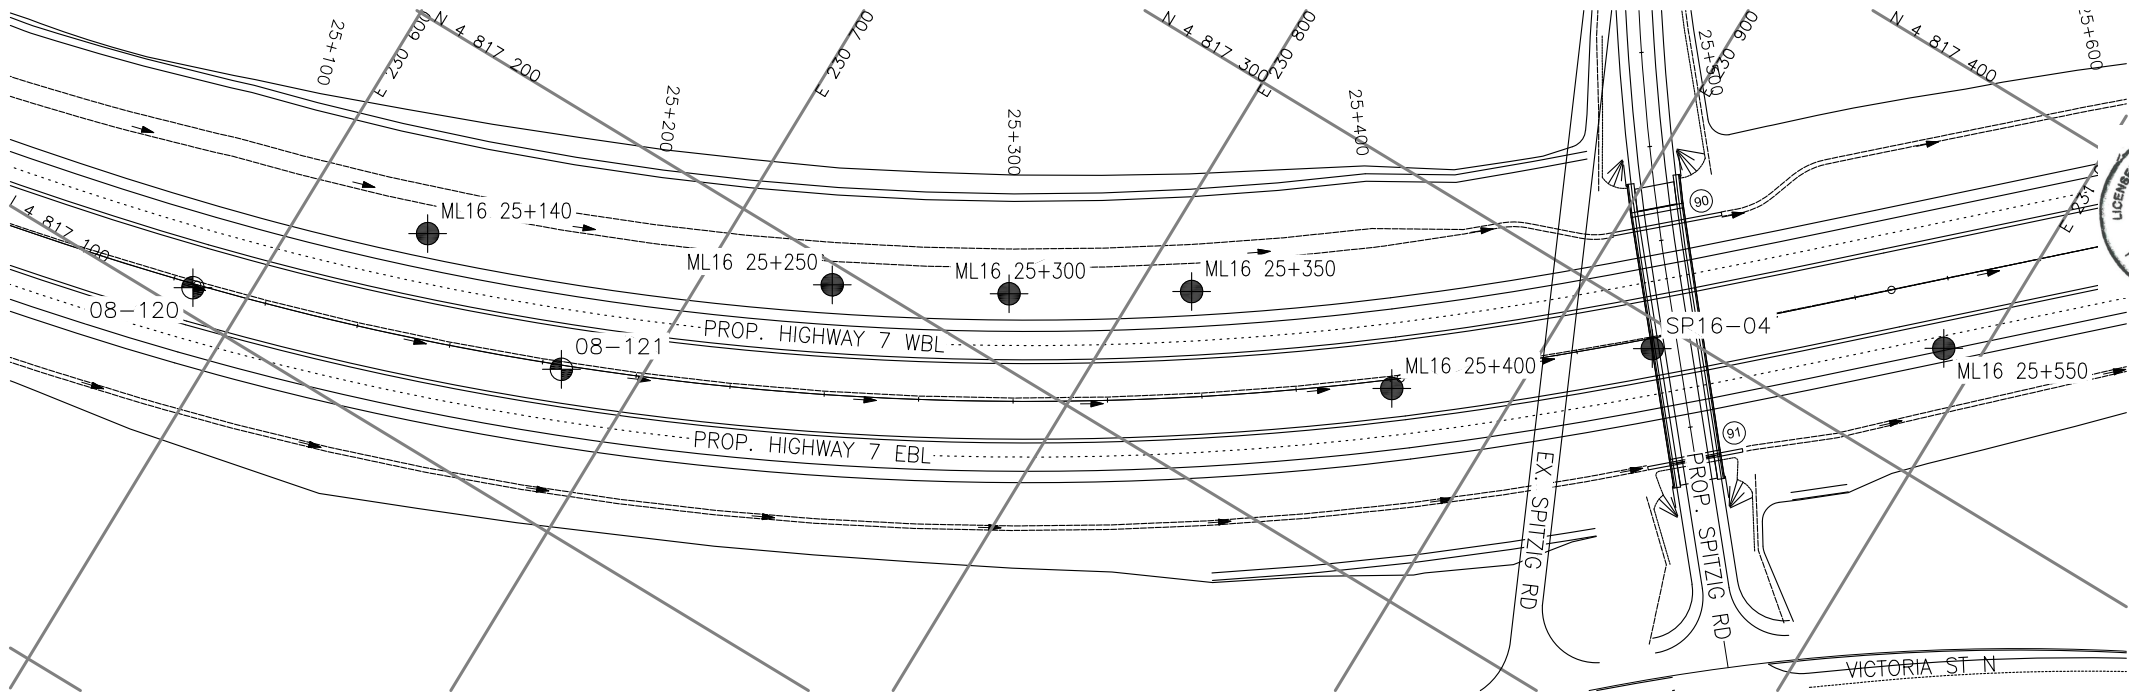
FIG No A9
GWP 408-88-00



PLAN

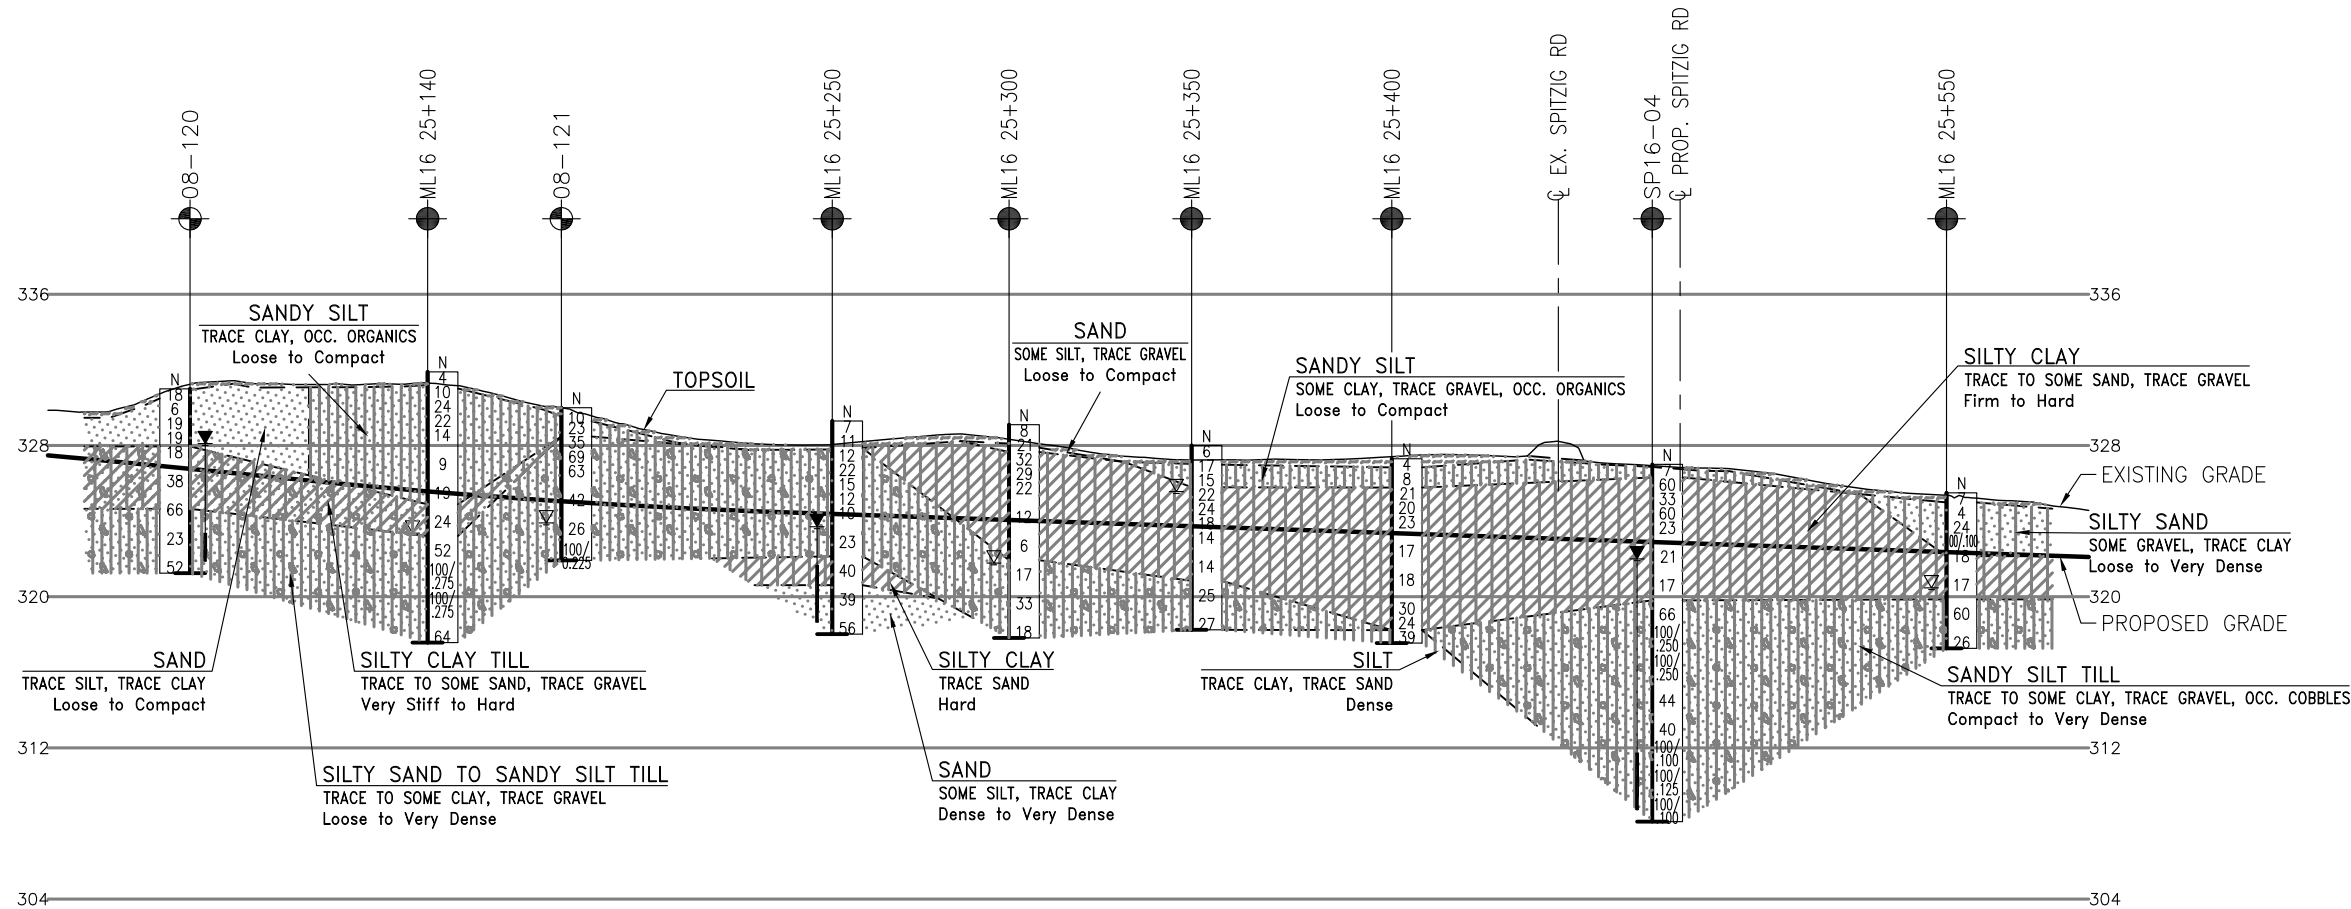

PROFILE ALONG PROPOSED HIGHWAY 7



METRIC
DIMENSIONS ARE IN METRES
AND/OR MILLIMETRES
UNLESS OTHERWISE SHOWN




CONT No
GWP No 408-88-00

HIGHWAY 7
MAINLINE CUT
25+050 TO 25+600
BOREHOLE LOCATIONS AND SOIL STRATA



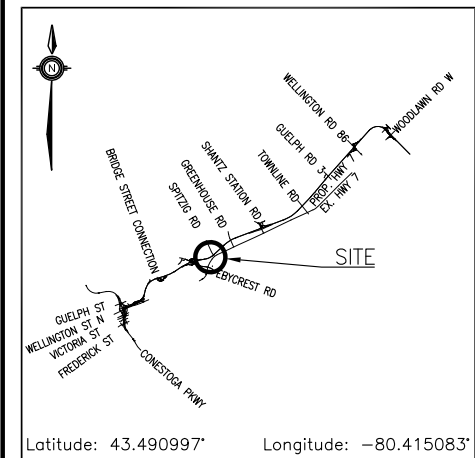THURBER ENGINEERING LTD.



KEYPLAN

LEGEND

	Borehole (Current Investigation)
	Borehole (2008 Investigation)
N	Blows /0.3m (Std Pen Test, 475J/blow)
CONE	Blows /0.3m (60° Cone, 475J/blow)
PH	Pressure, Hydraulic
	Water Level
	Head Artesian Water
	Piezometer
90%	Rock Quality Designation (RQD)
A/R	Auger Refusal

NO	ELEVATION	NORTHING	EASTING
ML16 25+140	331.9	4 817 151.0	230 632.0
ML16 25+250	329.3	4 817 195.0	230 730.5
ML16 25+300	329.1	4 817 217.3	230 771.7
ML16 25+350	328.0	4 817 242.9	230 812.7
ML16 25+400	327.3	4 817 248.4	230 871.3
ML16 25+550	325.5	4 817 333.3	230 990.6
SP16-04	327.0	4 817 293.2	230 924.7
08-120	331.0	4 817 106.5	230 586.3
08-121	330.0	4 817 138.7	230 680.9

NOTES

- The boundaries between soil strata have been established only at Borehole locations. Between Boreholes the boundaries are assumed from geological evidence.
- This drawing is for subsurface information only. Surface details and features are for conceptual illustration.
- Coordinate system is MTM NAD 83 Zone 10.

GEOCRES No. 40P09-067

REVISIONS	DATE	BY	DESCRIPTION
DESIGN	MKE	CHK	PKC
DRAWN	MFA	CHK	MKE
LOAD			
STRUCT			
DWG			



Appendix B.

**Highway 7: Station 26+450 – 26+950 (08-134, 08-135, 08-136, 08-138, ML16 26+525,
ML16 26+625, ML16 26+800, ML16 26+850, ML16 26+900)**

RECORD OF BOREHOLE No 08-134

1 OF 2

METRIC

GWP# 408-88-00 LOCATION N 4 817 970.1 E 231 673.6 ORIGINATED BY SLL
 DIST HWY 7 - New BOREHOLE TYPE Hollow Stem Augers COMPILED BY WM
 DATUM Geodetic DATE 2008.05.27 - 2008.05.27 LATITUDE LONGITUDE CHECKED BY RPR

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT				PLASTIC LIMIT w _p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa								
327.9	GROUND SURFACE							20 40 60 80 100								
0.0	SAND , some gravel, some silt, trace rootlets Dense Brown Moist to Wet		1	SS	42		327									
326.5																
1.4	Silty CLAY , trace sand Very stiff to hard Brown to Grey Moist (TILL)		2	SS	25		326									
			3	SS	49		325									
			4	SS	45		324									
			5	SS	66		323									
322.4																
5.5	Silty SAND , some clay, trace gravel Very Dense Grey Moist to Wet (TILL)		6	SS	100/ .175		322									
							321									
			7	SS	100/ .150		320									
							319									
	Difficulty advancing auger															
	Layer of silty clay		8	SS	100/ .125		318									

Continued Next Page

+³, ×³: Numbers refer to Sensitivity
 20
 15
 10
 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No 08-134

2 OF 2

METRIC

GWP# 408-88-00 LOCATION N 4 817 970.1 E 231 673.6 ORIGINATED BY SLL
DIST HWY 7 - New BOREHOLE TYPE Hollow Stem Augers COMPILED BY WM
DATUM Geodetic DATE 2008.05.27 - 2008.05.27 LATITUDE LONGITUDE CHECKED BY RPR

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT NATURAL MOISTURE CONTENT LIQUID LIMIT			UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa					WATER CONTENT (%)				
							20	40	60	80	100	W _p	W	W _L			
317.6 10.3	<p>Silty SAND, some clay, trace gravel, trace gravel Very Dense Grey Moist to Wet (TILL)</p> <p>Continued From Previous Page</p> <p>END OF BOREHOLE AT 10.3m. AUGER REFUSAL AT 10.1m UPON PROBABLE BEDROCK OR BOULDER. AUGER GRINDING AT 10.2m. BOREHOLE BACKFILLED WITH BENTONITE BENSEAL AND CUTTINGS TO SURFACE.</p>	o															

RECORD OF BOREHOLE No 08-135

1 OF 2

METRIC

GWP# 408-88-00 LOCATION N 4 818 025.8 E 231 756.2 ORIGINATED BY SLL
 DIST HWY 7 - New BOREHOLE TYPE Hollow Stem Augers COMPILED BY WM
 DATUM Geodetic DATE 2008.05.27 - 2008.05.27 LATITUDE LONGITUDE CHECKED BY RPR

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT				UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa					
								20 40 60 80 100					
								○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL × LAB VANE					
						WATER CONTENT (%)							
							20 40 60 80 100		20 40 60				
331.7	GROUND SURFACE												
0.0	SAND , trace gravel, occasional rootlets, occasional cobbles Loose Brown Moist												
			1	SS	7					○			
330.2													
1.4	SILT and SAND to Sandy SILT , trace gravel, trace clay Loose to Very Dense Brown to Grey Moist to Wet (TILL)		2	SS	8					○			1 45 46 8
			3	SS	83					○			
	Occasional cobbles		4	SS	100/ 275					○			
	Layer of silty clay and sand		5	SS	79					○H			4 43 41 12
			6	SS	78					○			
			7	SS	100/ 200					○			1 32 60 7
	Layer of clayey silt		8	SS	100/ 250					○H			0 34 50 16

Continued Next Page

+³, ×³: Numbers refer to Sensitivity
 20
 15
 10
 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No 08-135

2 OF 2

METRIC

GWP# 408-88-00 LOCATION N 4 818 025.8 E 231 756.2 ORIGINATED BY SLL
DIST HWY 7 - New BOREHOLE TYPE Hollow Stem Augers COMPILED BY WM
DATUM Geodetic DATE 2008.05.27 - 2008.05.27 LATITUDE LONGITUDE CHECKED BY RPR

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa ○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL × LAB VANE									
320.6	Continued From Previous Page Sandy SILT, some clay, trace gravel Very Dense Brown to Grey Moist to Wet (TILL)		9	SS	100/ 175		321										
11.0	END OF BOREHOLE AT 11.0m. BOREHOLE OPEN TO 11.0m AND WATER LEVEL AT 9.3m UPON COMPLETION OF DRILLING. BOREHOLE BACKFILLED WITH BENTONITE BENSEAL TO SURFACE.																

RECORD OF BOREHOLE No 08-136

1 OF 1

METRIC

GWP# 408-88-00 LOCATION N 4 818 106.6 E 231 895.2 ORIGINATED BY SLL
 DIST HWY 7 - New BOREHOLE TYPE Hollow Stem Augers COMPILED BY WM
 DATUM Geodetic DATE 2008.05.27 - 2008.05.27 LATITUDE LONGITUDE CHECKED BY RPR

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT				UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)			
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa								
330.5								20 40 60 80 100						PLASTIC LIMIT w _p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L
								○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL × LAB VANE								
								WATER CONTENT (%)								
								20 40 60								
330.5	GROUND SURFACE													GR SA SI CL		
0.0	SAND , some silt, trace gravel, occasional rootlets Brown Moist															
329.9																
0.6	Sandy SILT , some clay, trace gravel Loose to Very Dense Brown Moist (TILL)		1	SS	7											
			2	SS	30											
	Layer of clayey silt		3	SS	20											
			4	SS	58											
	Layer of silt		5	SS	100/ 275											
			6	SS	100/ 200											
323.5																
7.0	Silty CLAY , trace sand Hard Grey Moist (TILL)															
322.5			7	SS	100											
8.1	END OF BOREHOLE AT 8.1m. BOREHOLE OPEN TO 8.1m AND DRY UPON COMPLETION. BOREHOLE BACKFILLED WITH BENTONITE BENSEAL AND AUGER CUTTINGS TO SURFACE.															

ONTMT452 2020LIBRARY(MTO) - COPY.GLB MTO-11375(GINTDATA).GPJ 7/20/23

+³, ×³: Numbers refer to
Sensitivity 20
15 5
10 (%) STRAIN AT FAILURE

METRIC

[illegible]

+³, ×³: Numbers refer to Sensitivity

RECORD OF BOREHOLE No 08-138

2 OF 2

METRIC

GWP# 408-88-00 LOCATION N 4 818 075.5 E 231 835.9 ORIGINATED BY SLL
DIST HWY 7 - New BOREHOLE TYPE Hollow Stem Augers COMPILED BY WM
DATUM Geodetic DATE 2008.05.28 - 2008.05.28 LATITUDE LONGITUDE CHECKED BY RPR

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa ○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL × LAB VANE									
321.4	Continued From Previous Page Sandy SILT , some clay, trace gravel, occasional cobbles Compact to Very Dense Grey Moist (TILL)		9	SS	100/ 275		322										1 21 61 17
11.1	END OF BOREHOLE AT 11.1m. BOREHOLE DRY ON COMPLETION. Piezometer installation consists of 25mm diameter Schedule 40 PVC pipe with a 1.52m slotted screen. WATER LEVEL READINGS DATE DEPTH(m) ELEV.(m) 2008.05.28 5.9 326.6 2008.07.23 1.6 330.9																

RECORD OF BOREHOLE No ML16 26+525 1 OF 2 METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 817 992.7 E 231 710.1 ORIGINATED BY TM
 DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MFA
 DATUM Geodetic DATE 2017.04.24 - 2017.04.25 LATITUDE 43.498281 LONGITUDE -80.403783 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT				PLASTIC LIMIT NATURAL MOISTURE CONTENT LIQUID LIMIT			UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa				WATER CONTENT (%)				
330.2	GROUND SURFACE															
0.0 0.1	TOPSOIL: (75mm) Sandy SILT , some clay, trace gravel, trace organics, occasional cobbles Loose to Very Dense Brown Moist (TILL)		1	SS	4											
			2	SS	9											
			3	SS	14											
			4	SS	29											
			5	SS	23											
			6	SS	64											
324.6																
5.6	Sandy Silty CLAY , trace gravel Hard Brown Moist (TILL)		7	SS	100/ .075											
323.2																
7.0	SAND and GRAVEL , trace silt, trace clay Dense to Very Dense Brown Wet		8	SS	48/ .075											
			9	SS	46											

Continued Next Page

+³, ×³: Numbers refer to
Sensitivity 20
15 10 5 0 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No ML16 26+525 2 OF 2 METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 817 992.7 E 231 710.1 ORIGINATED BY TM
 DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MFA
 DATUM Geodetic DATE 2017.04.24 - 2017.04.25 LATITUDE 43.498281 LONGITUDE -80.403783 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL		
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa								
								20 40 60 80 100								
Continued From Previous Page							○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL x LAB VANE					PLASTIC LIMIT NATURAL MOISTURE CONTENT LIQUID LIMIT W _P W W _L WATER CONTENT (%) 20 40 60				
320.0							320									
10.2	Sandy SILT , trace gravel, trace clay Very Dense Grey Wet (TILL)		10	SS	70											
							319									
317.7			11	SS	40/		318									
12.4	END OF BOREHOLE AT 12.4m. Piezometer installation consists of 25mm diameter Schedule 40 PVC pipe with a 1.52m slotted screen. WATER LEVEL READINGS DATE DEPTH(m) ELEV.(m) 2017.11.27 5.7 324.4 2018.05.01 5.3 324.9				.075											

ONTMT452 2020LIBRARY(MTO) - COPY.GLB MTO-11375(GINTDATA).GPJ 7/20/23

RECORD OF BOREHOLE No ML16 26+625 1 OF 2 METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 818 050.9 E 231 795.4 ORIGINATED BY TM
 DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MFA
 DATUM Geodetic DATE 2017.04.26 - 2017.05.03 LATITUDE 43.498813 LONGITUDE -80.402736 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)								
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa									WATER CONTENT (%)					GR	SA	SI	CL
								○ UNCONFINED	+	FIELD VANE	● QUICK TRIAXIAL	×					LAB VANE								
332.9	GROUND SURFACE																								
0.0	TOPSOIL: (75mm) Silty SAND , trace clay, trace gravel, trace organics, occasional cobbles Very Loose to Dense Brown Moist to Wet (TILL)		1	SS	3																				
0.1																									
			2	SS	8																				
			3	SS	16																				
			4	SS	12															3 49 40 8					
			5	SS	2																				
			6	SS	100/ .175																				
327.4	Sandy Silty CLAY , trace gravel Hard Grey Moist (TILL)																								
5.5																									
			7	SS	55															2 39 36 23					
				8	SS	91																			
			9	SS	48															0 27 35 38					

Continued Next Page

+³, ×³: Numbers refer to
Sensitivity 20
15 10 5 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No ML16 26+625 2 OF 2 METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 818 050.9 E 231 795.4 ORIGINATED BY TM
DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MFA
DATUM Geodetic DATE 2017.04.26 - 2017.05.03 LATITUDE 43.498813 LONGITUDE -80.402736 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT				PLASTIC LIMIT NATURAL LIMIT MOISTURE LIQUID CONTENT LIMIT			UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa				WATER CONTENT (%)				
								○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL × LAB VANE								
								20 40 60 80 100	20 40 60							
Continued From Previous Page																
322.7																
10.2	Sandy SILT , trace clay, trace gravel Very Dense Grey Wet (TILL)		10	SS	76		322					○				
							321					○				
			11	SS	100/ .175		320									
							319					○				
			12	SS	78		318									
317.3			13	SS	100/ 250							○				
15.6	END OF BOREHOLE AT 15.6m. BOREHOLE CAVED TO 4.6m UPON COMPLETION. BOREHOLE BACKFILLED WITH BENTONITE HOLEPLUG AND AUGER CUTTINGS TO SURFACE.															

ONTMT452 2020LIBRARY(MTO) - COPY.GLB MTO-11375(GINTDATA).GPJ 7/20/23

RECORD OF BOREHOLE No ML16 26+800 1 OF 2 METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 818 133.2 E 231 947.9 ORIGINATED BY SB
 DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MP
 DATUM Geodetic DATE 2018.01.25 - 2018.01.25 LATITUDE 43.499568 LONGITUDE -80.400862 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT				PLASTIC LIMIT NATURAL MOISTURE CONTENT LIQUID LIMIT			UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)				
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa				WATER CONTENT (%)								
330.1	GROUND SURFACE							20	40	60	80	100		W _P	W	W _L	GR	SA	SI	CL
0.0	TOPSOIL: (900mm)		1	SS	6		330													
329.2																				
0.9	SAND, some gravel, trace silt, trace clay Very Loose to Compact Brown Moist to Wet		2	SS	2															
			3	SS	3															
327.5			4	SS	23															
2.6	Sandy Silty CLAY, trace gravel Very Stiff to Hard Grey Moist (TILL)																			
			5	SS	36															
			6	SS	100/ 0.250															
			7	SS	100/ 0.275															
323.1																				
7.1	Silty SAND, trace clay Compact to Very Dense Grey Wet (TILL)																			
			8	SS	100/ 0.275															

Continued Next Page

+³, ×³: Numbers refer to Sensitivity 20 15 10 5 0 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No ML16 26+800 2 OF 2 METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 818 133.2 E 231 947.9 ORIGINATED BY SB
 DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MP
 DATUM Geodetic DATE 2018.01.25 - 2018.01.25 LATITUDE 43.499568 LONGITUDE -80.400862 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			20	40	60	80	100					
	Continued From Previous Page WATER LEVEL AT 1.8m UPON COMPLETION. BOREHOLE BACKFILLED WITH BENTONITE HOLEPLUG AND AUGER CUTTINGS TO SURFACE.																

ONTMT452 2020LIBRARY(MTO) - COPY.GLB MTO-11375(GINTDATA).GPJ 7/20/23

1 OF 1

ORIGINATED BY SB

COMPILED BY MF

CHECKED BY JPI

ONTMT4S2 2020LIBRARY(MTO) - COPY.GLB MTO-11375(GINTDATA).GPJ 7/20/23

+³, ×³: Numbers refer to Sensitivity

RECORD OF BOREHOLE No ML16 26+900 1 OF 1 METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 818 179.5 E 232 046.4 ORIGINATED BY JB
 DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MP
 DATUM Geodetic DATE 2018.01.26 - 2018.01.26 LATITUDE 43.499995 LONGITUDE -80.399650 CHECKED BY JPL


SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)						
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa												
331.6	GROUND SURFACE							20	40	60	80	100								
0.0	TOPSOIL: (550mm)		1	SS	6															
331.1																				
0.6	Gravelly SAND , trace silt, occasional cobbles Compact to Very Dense Brown Dry to Moist		2	SS	14															
	Auger grinding at 1.5m		3	SS	100/ 0.275															
			4	SS	57															
	Auger grinding at 3.0m		5	SS	100/ 0.225															
	Auger grinding at 4.9m		6	SS	100/ 0.300															
326.1																				
5.5	Sandy SILT , some clay, trace gravel, occasional cobbles Very Dense Brown Wet (TILL)		7	SS	100/ 0.150															
	Auger grinding at 7.2m																			
323.6			8	SS	100/ 0.225															
8.0	END OF BOREHOLE AT 8.0m. Piezometer installation consists of 19mm diameter Schedule 40 PVC pipe with a 3.0m slotted screen.																			
	WATER LEVEL READINGS DATE DEPTH(m) ELEV.(m) 2018.05.01 5.4 326.2																			

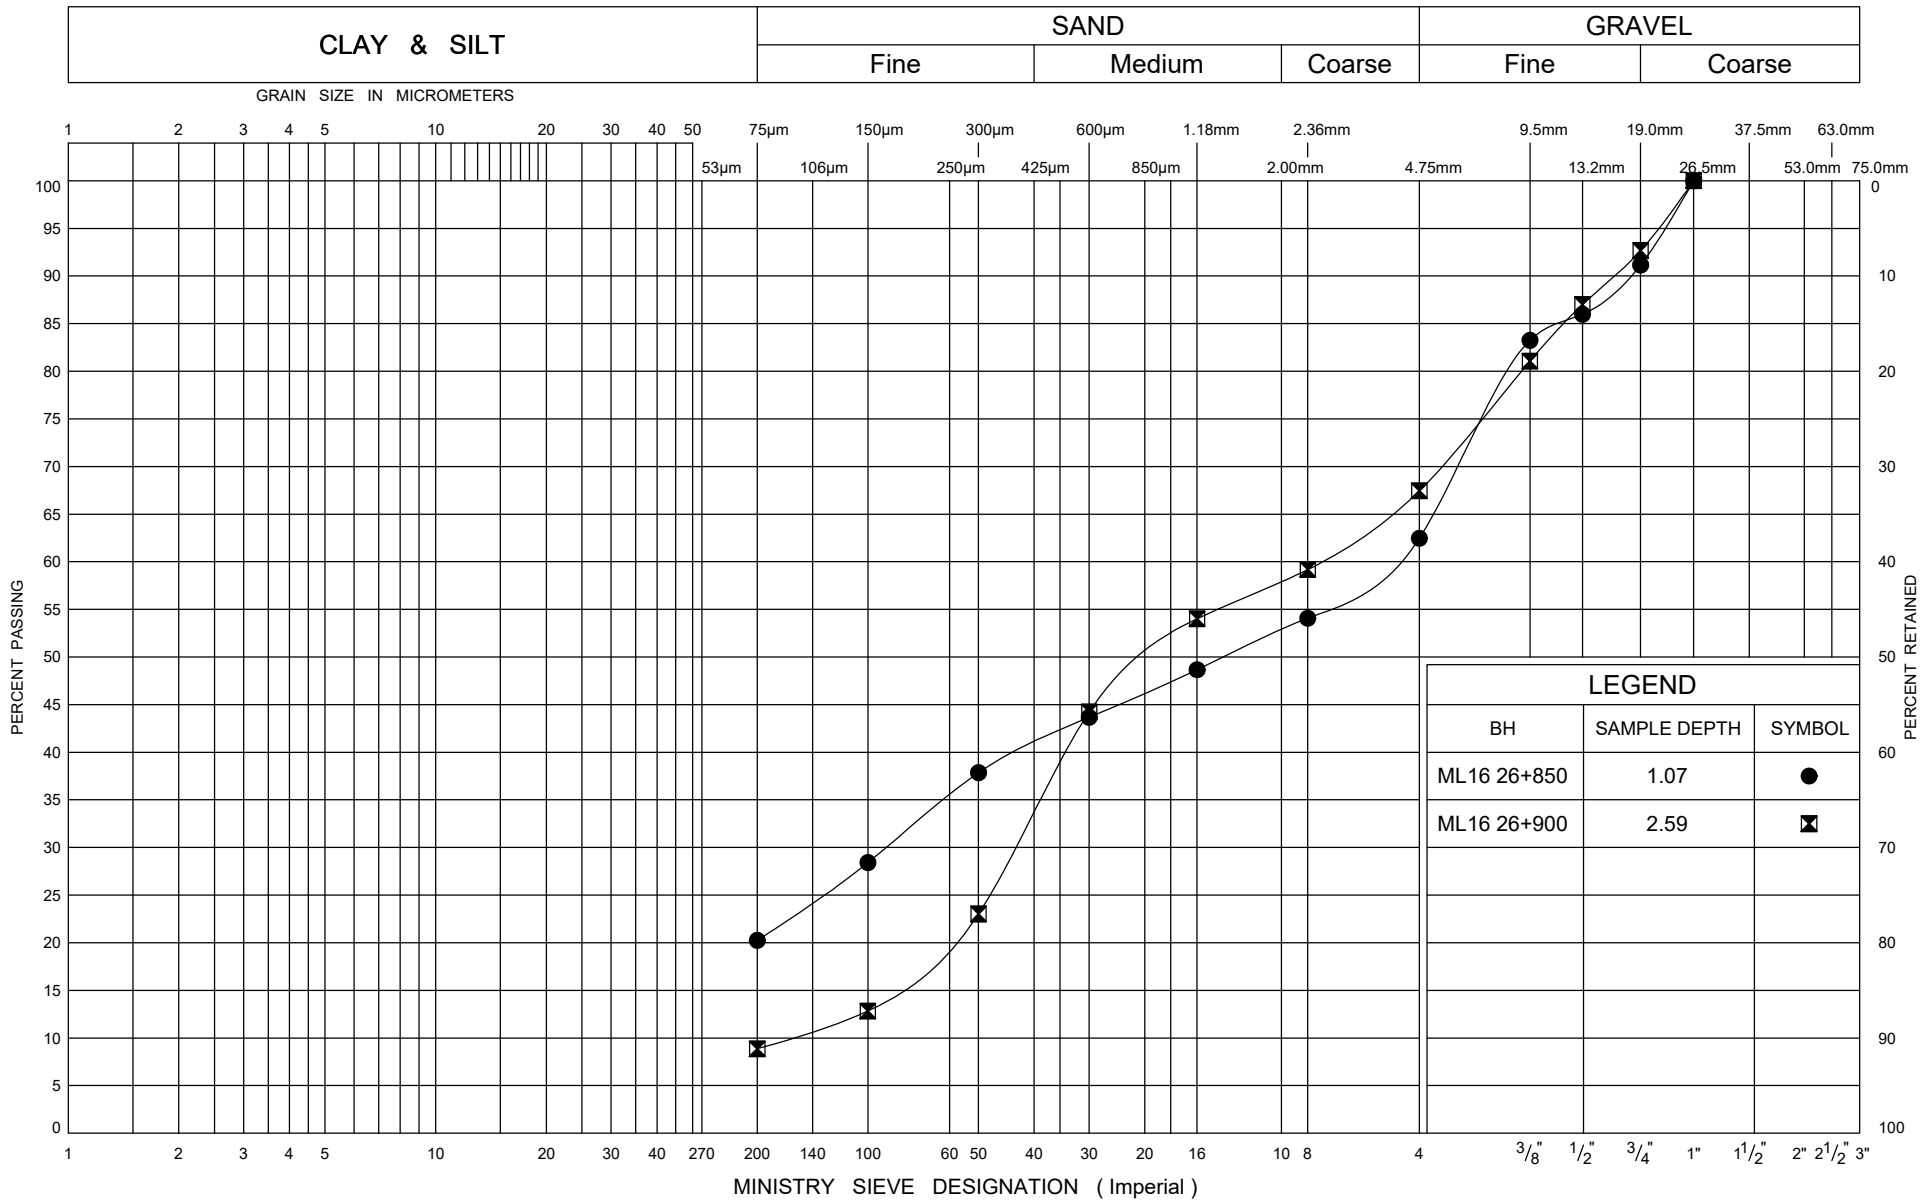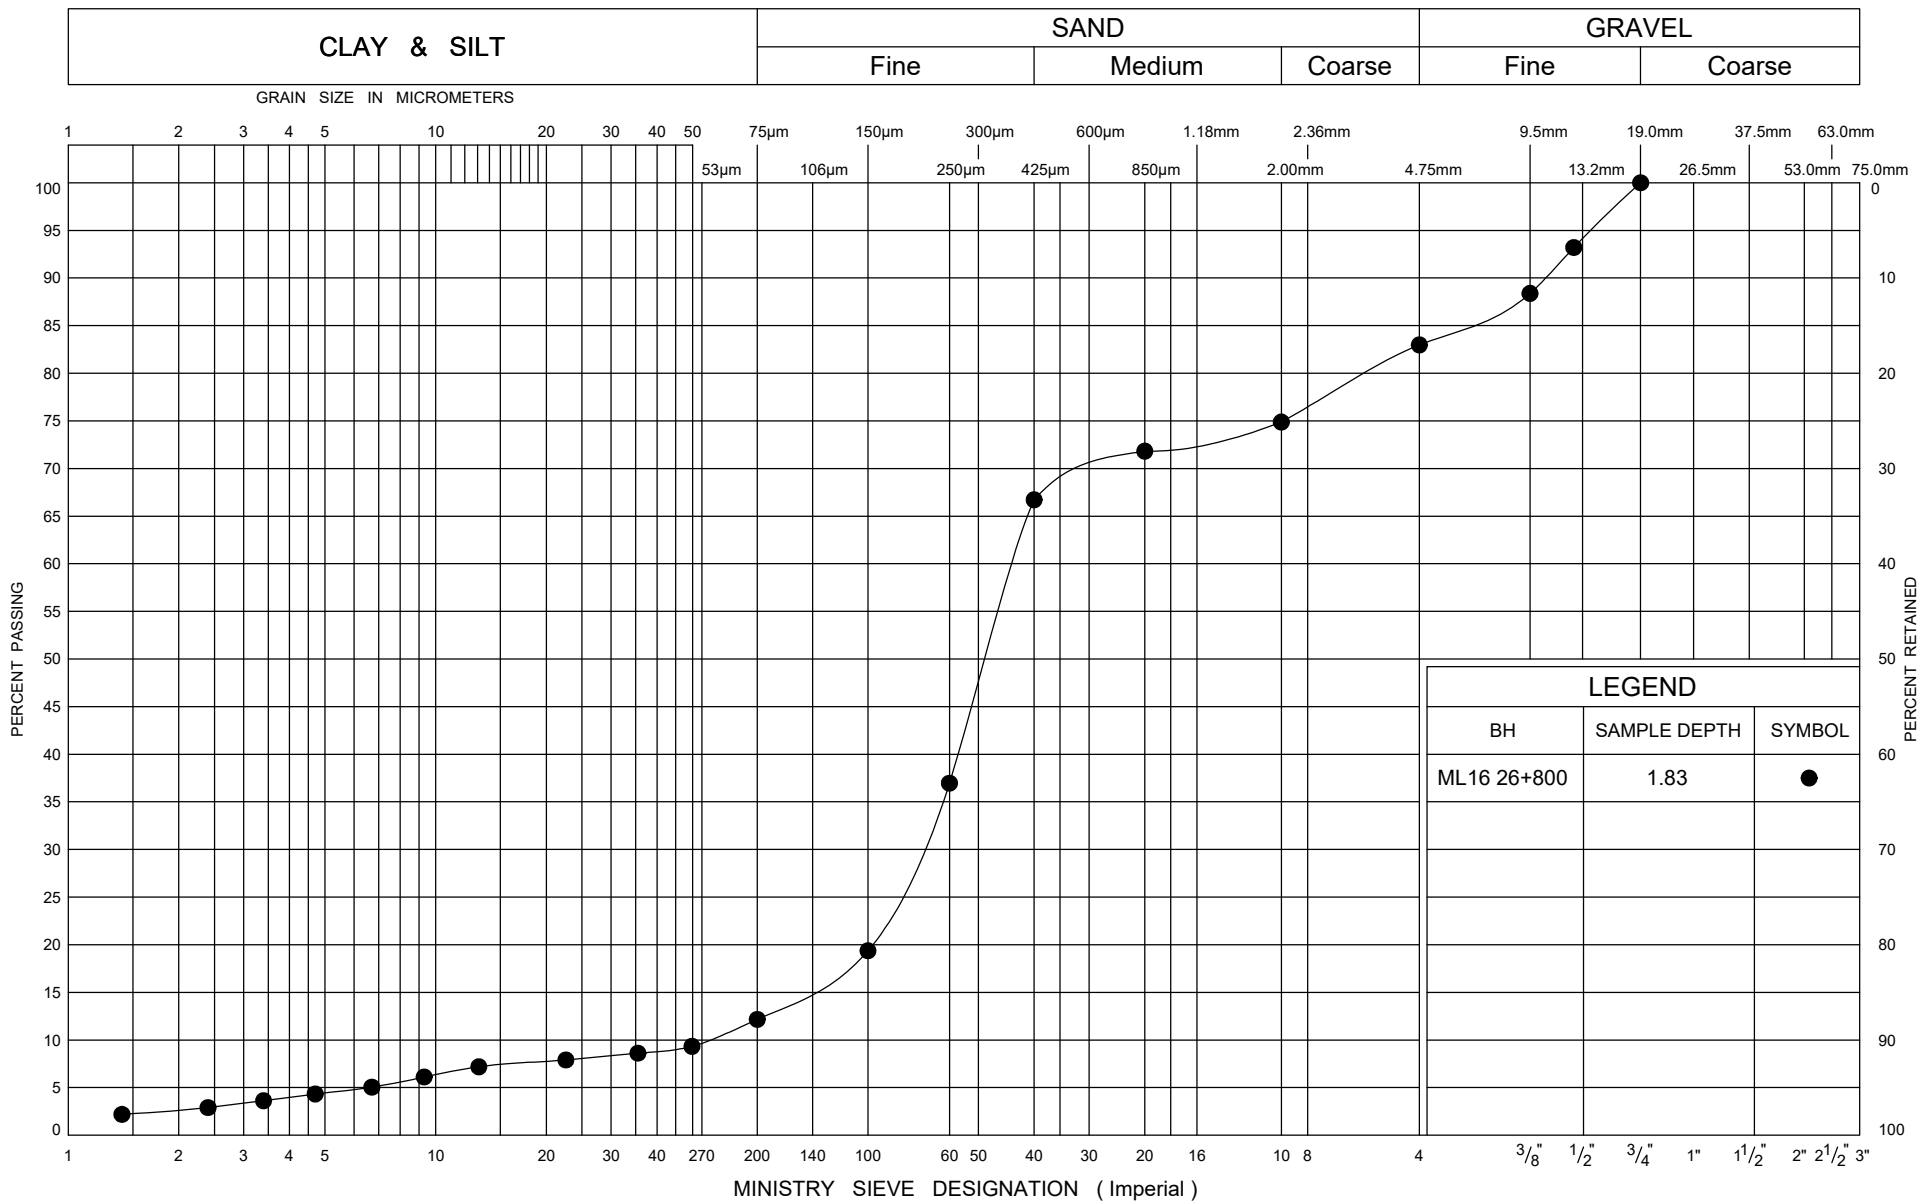
ONTMT452 2020LIBRARY(MTO) - COPY.GLB MTO-11375(GINTDATA).GPJ 7/20/23

+³, ×³: Numbers refer to Sensitivity 20 15 10 5 (%) STRAIN AT FAILURE

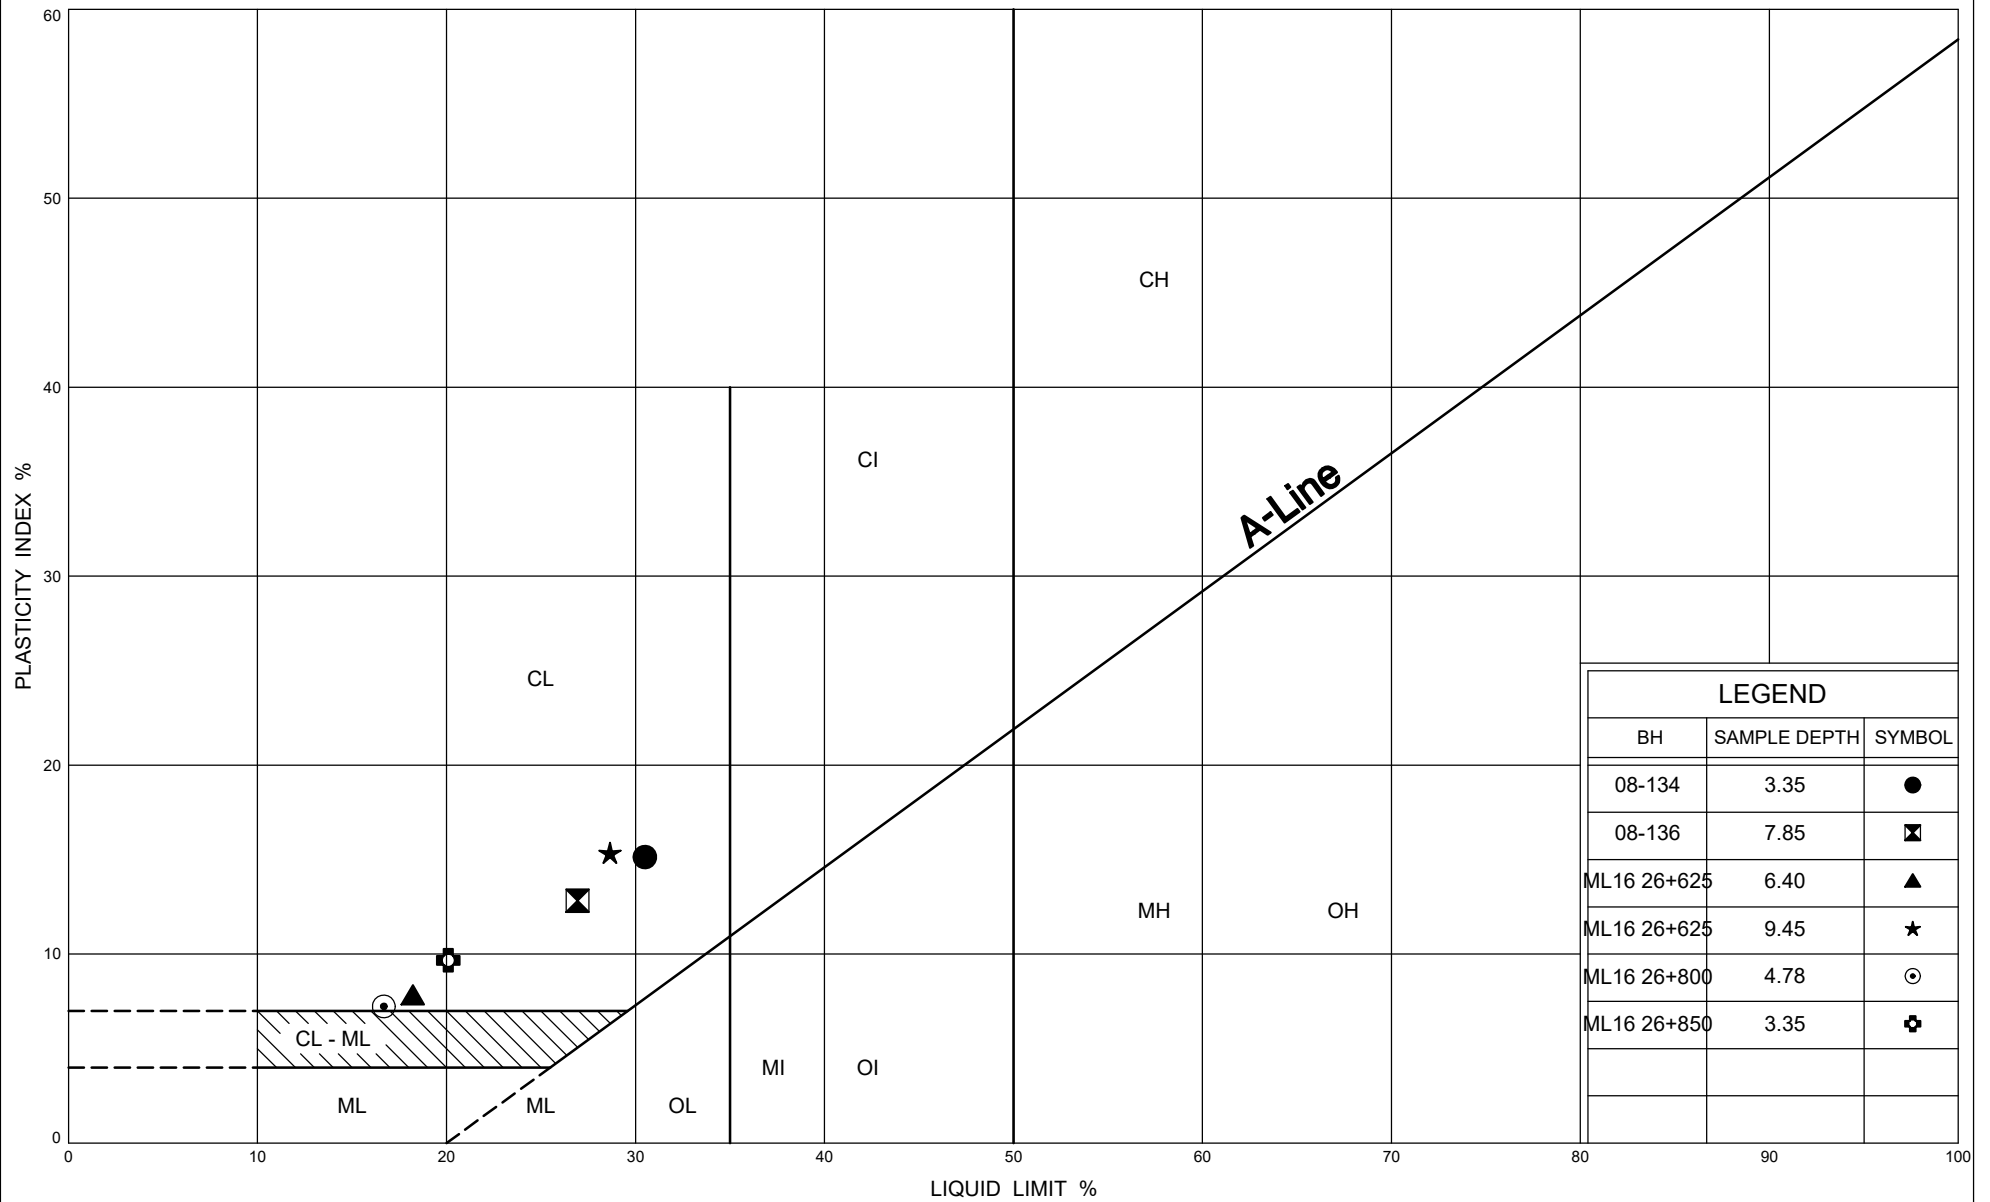


FIG No B1
GWP 408-88-00





LEGEND		
BH	SAMPLE DEPTH	SYMBOL
ML16 26+800	1.83	●




Ministry of
Transportation


PLASTICITY CHART


Silty CLAY TILL


FIG No B4

GWP 408-88-00

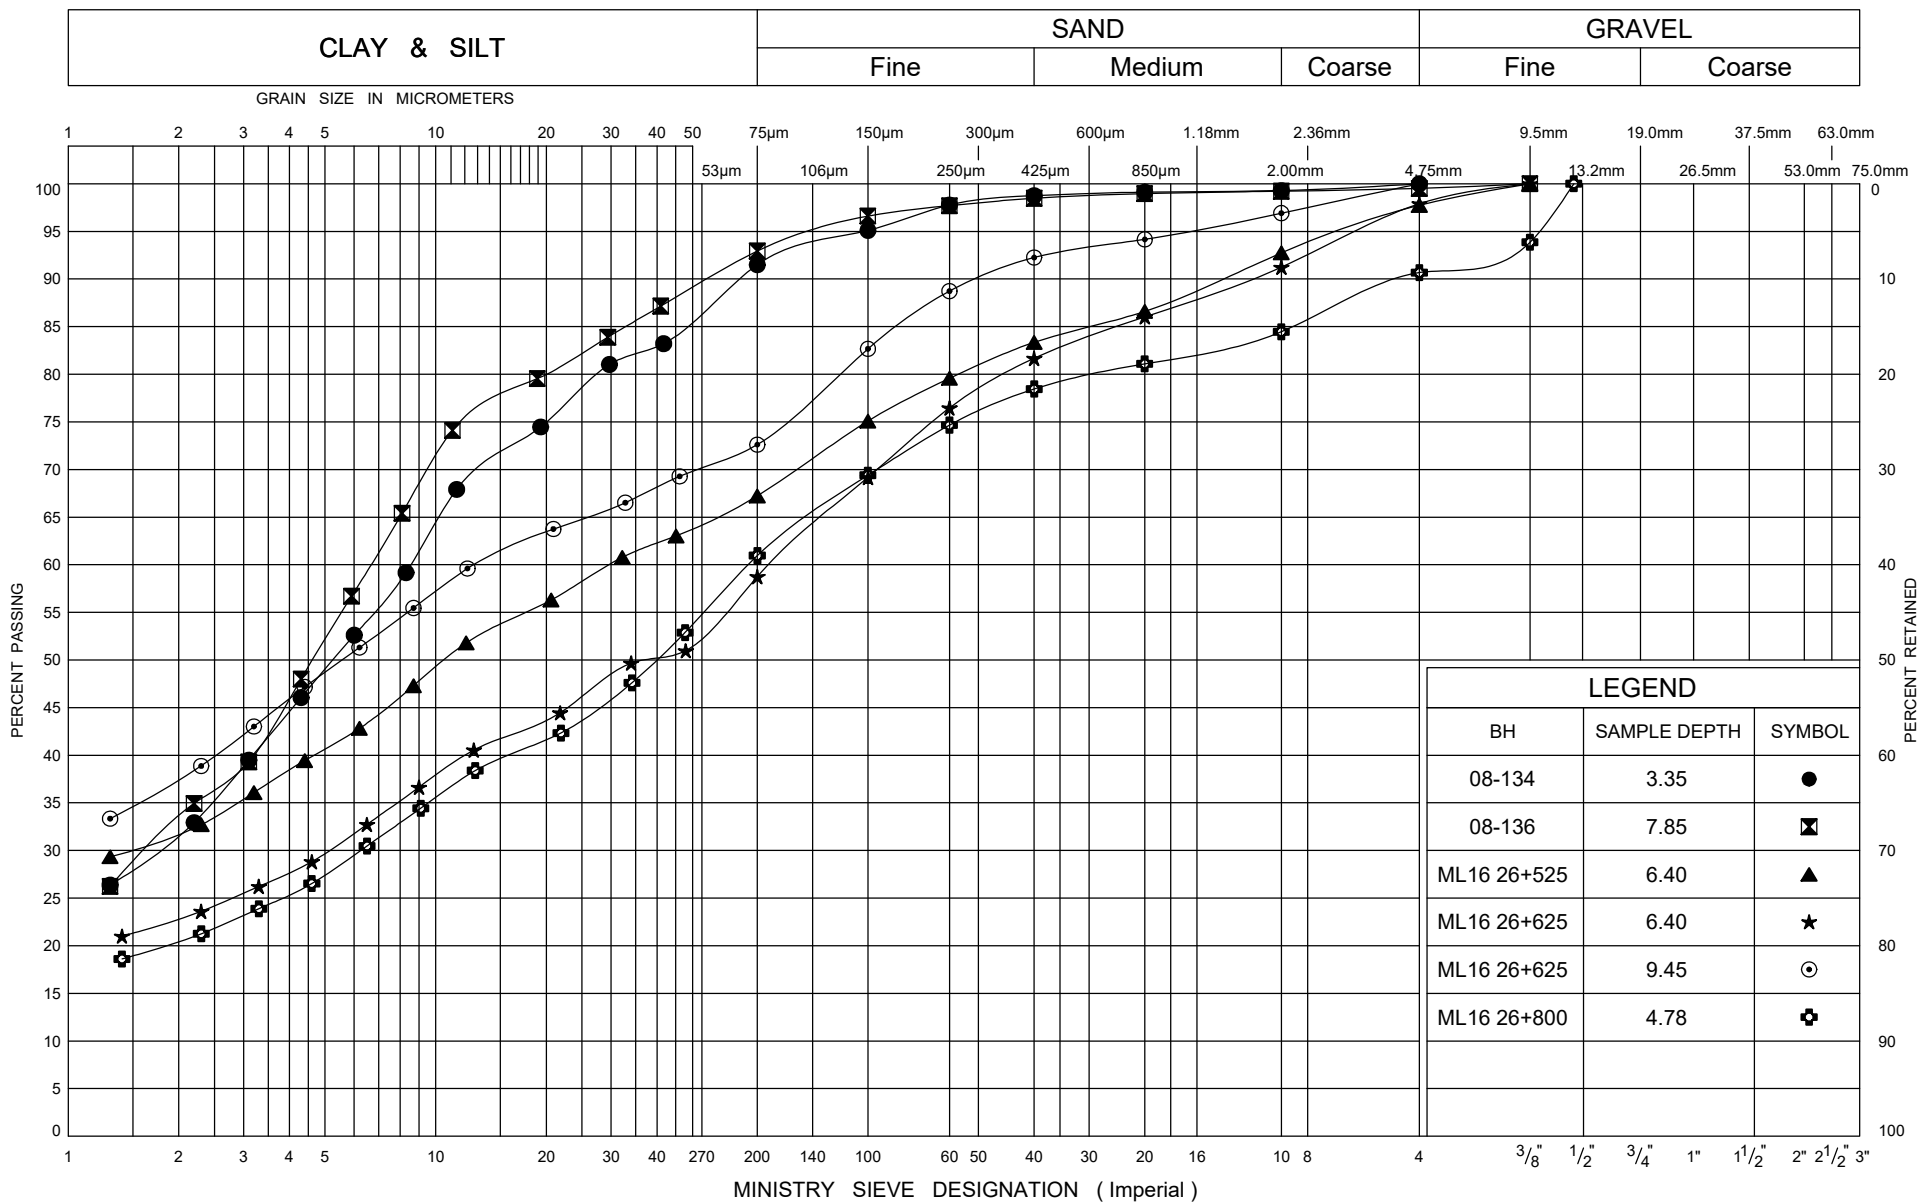

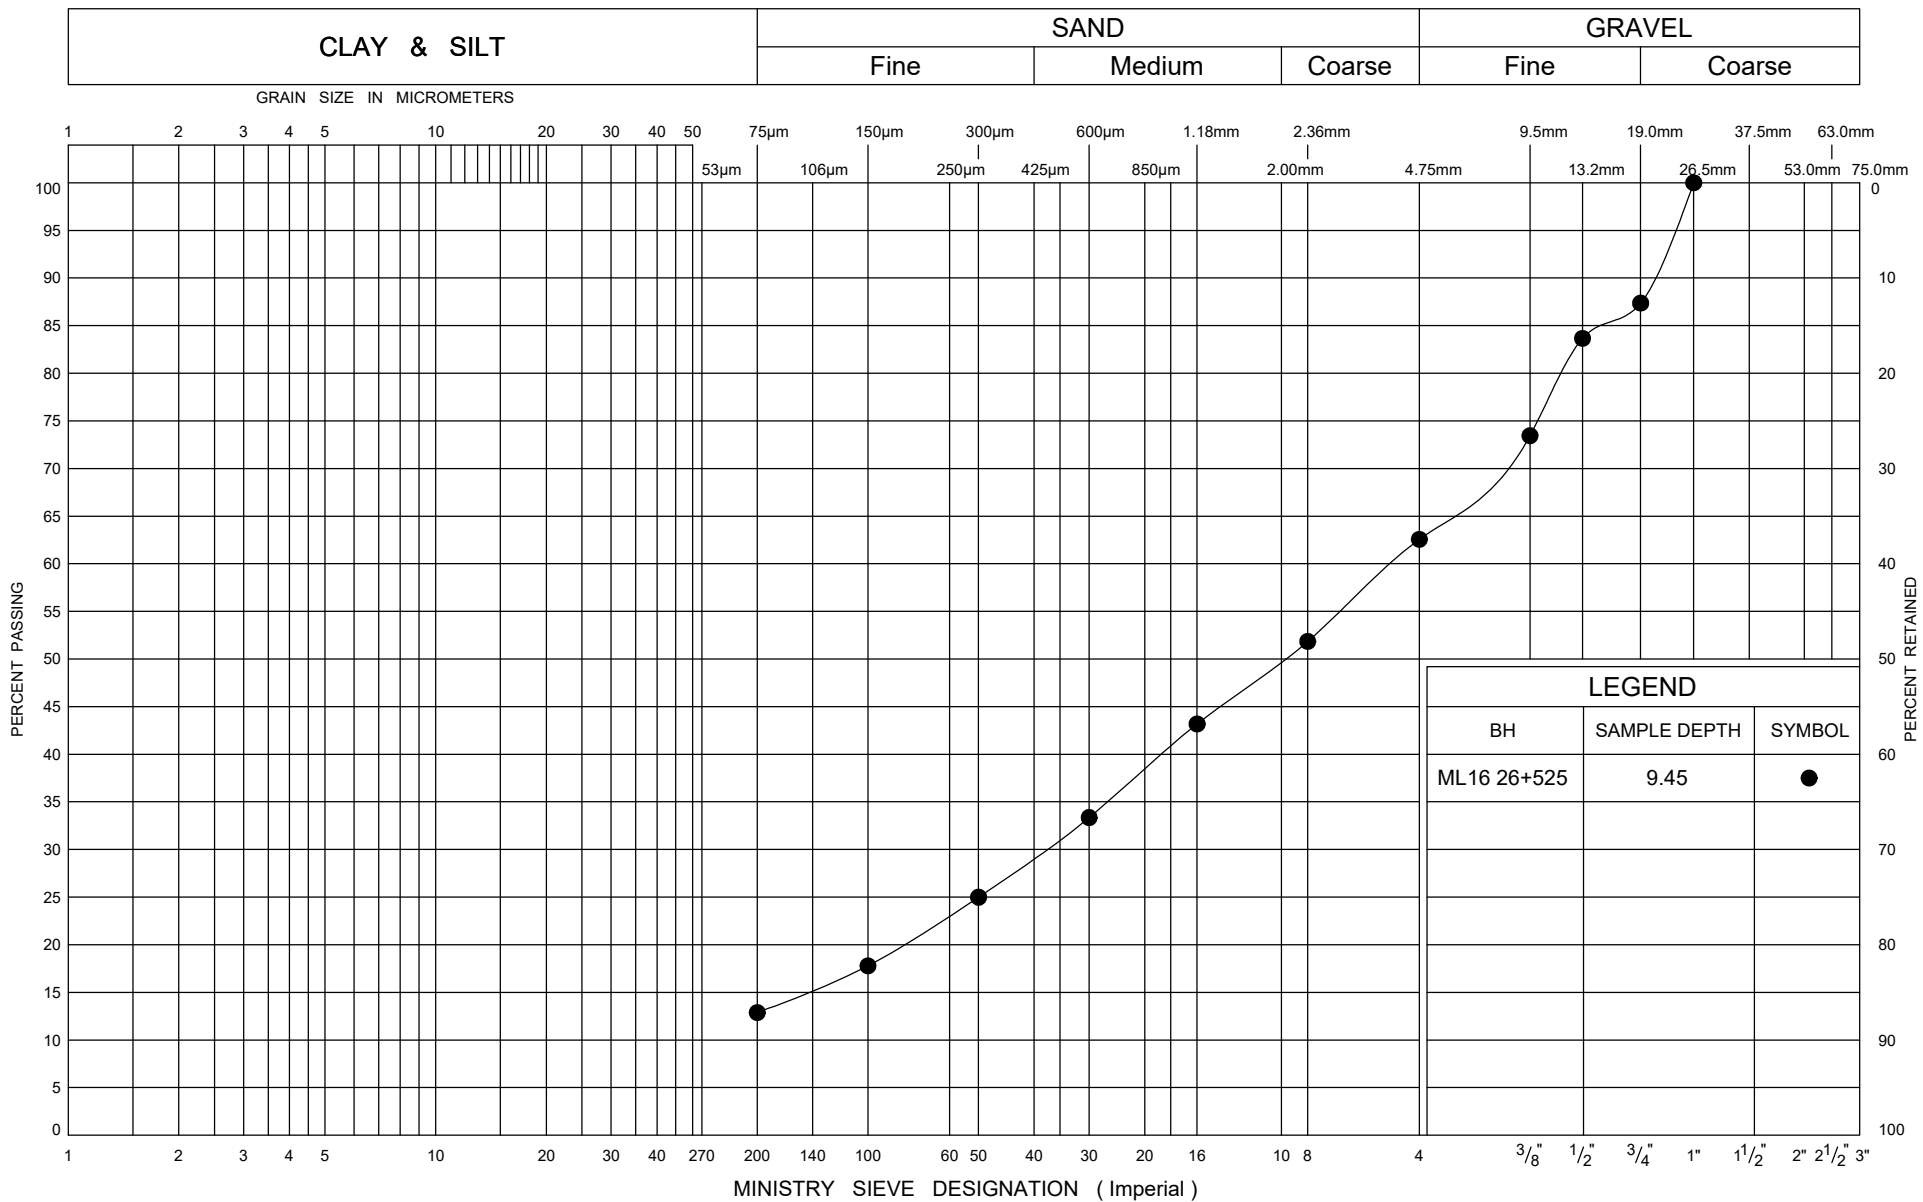

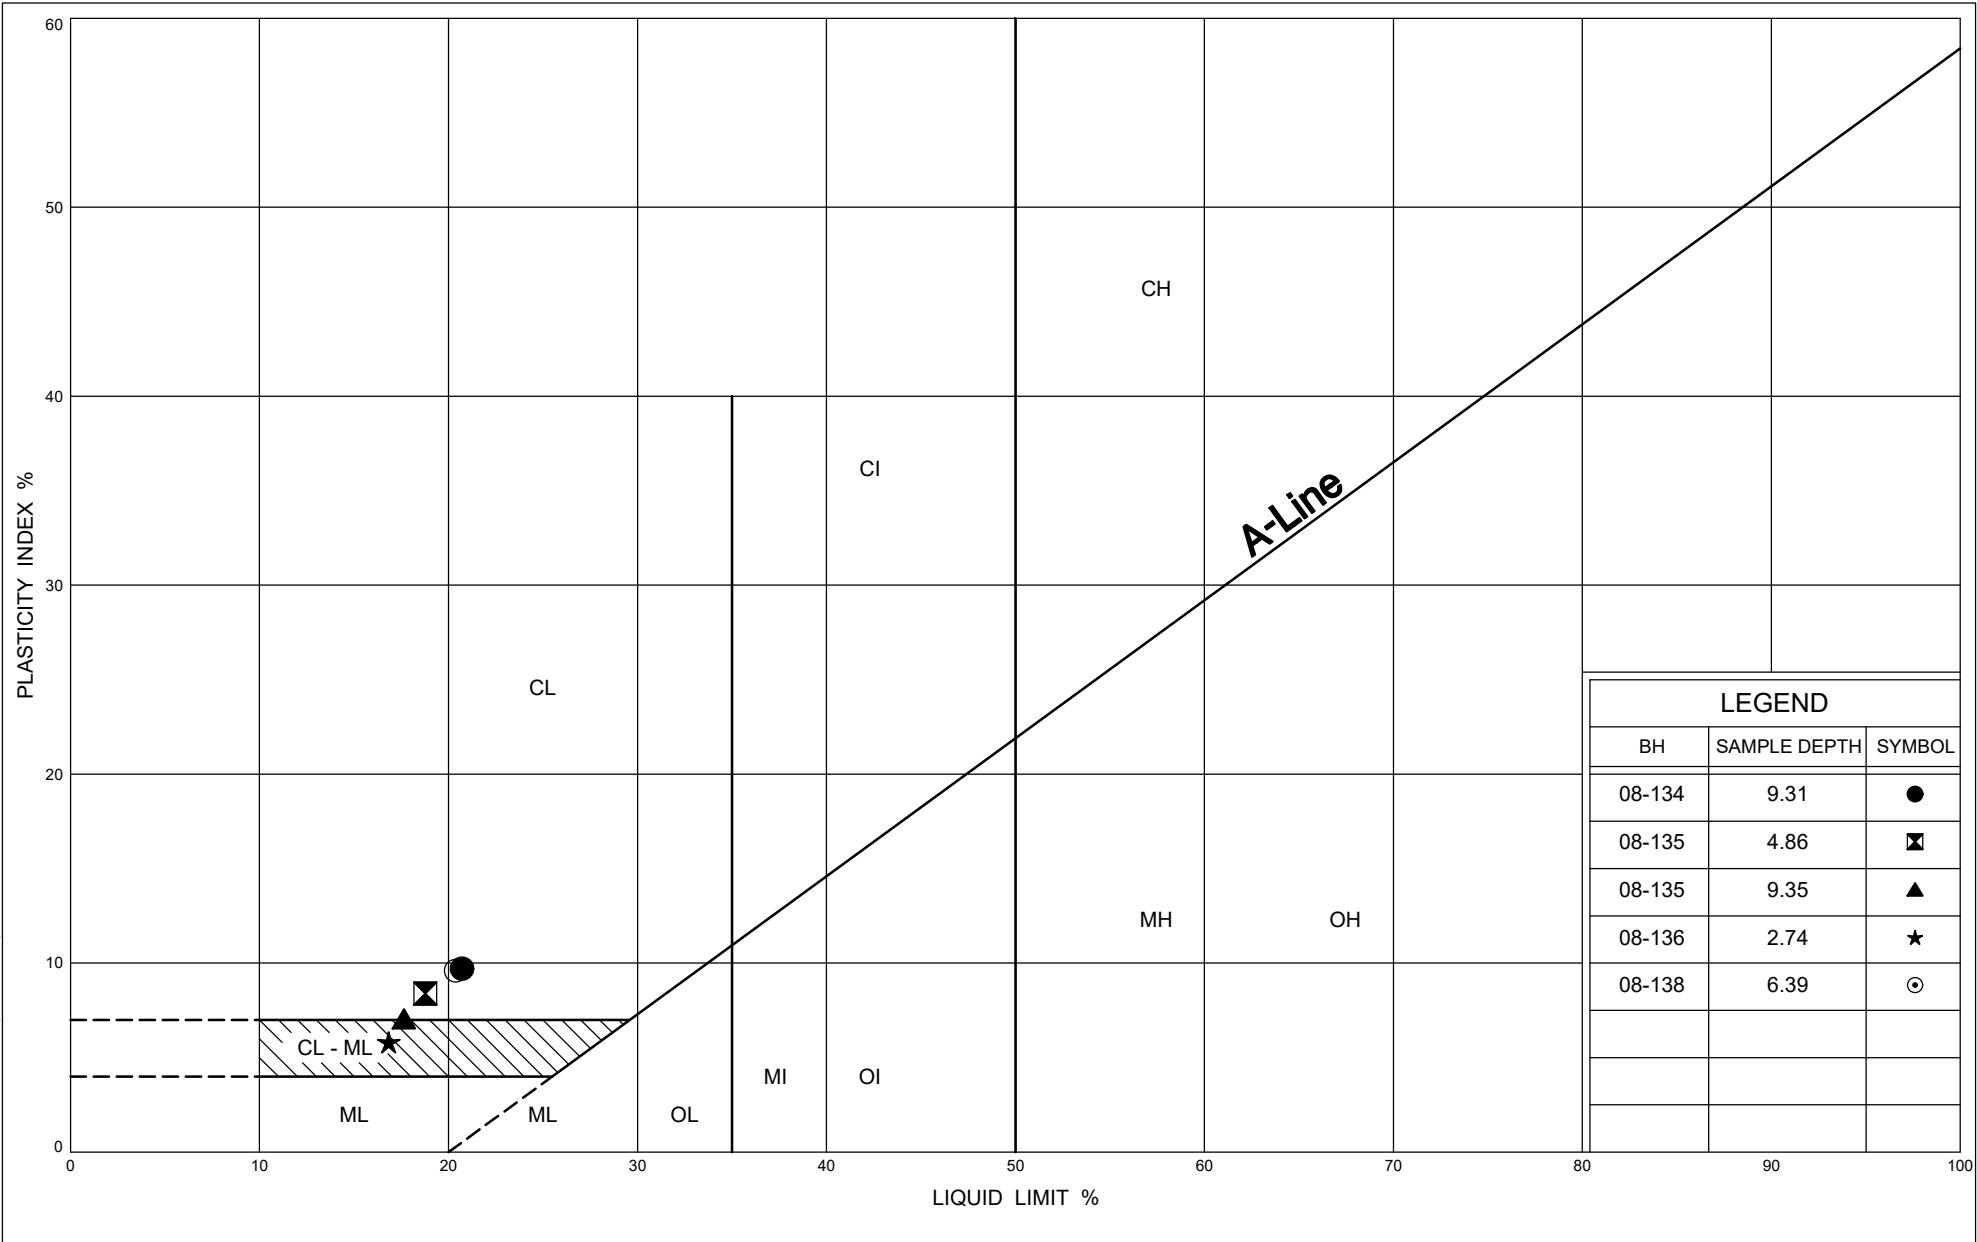

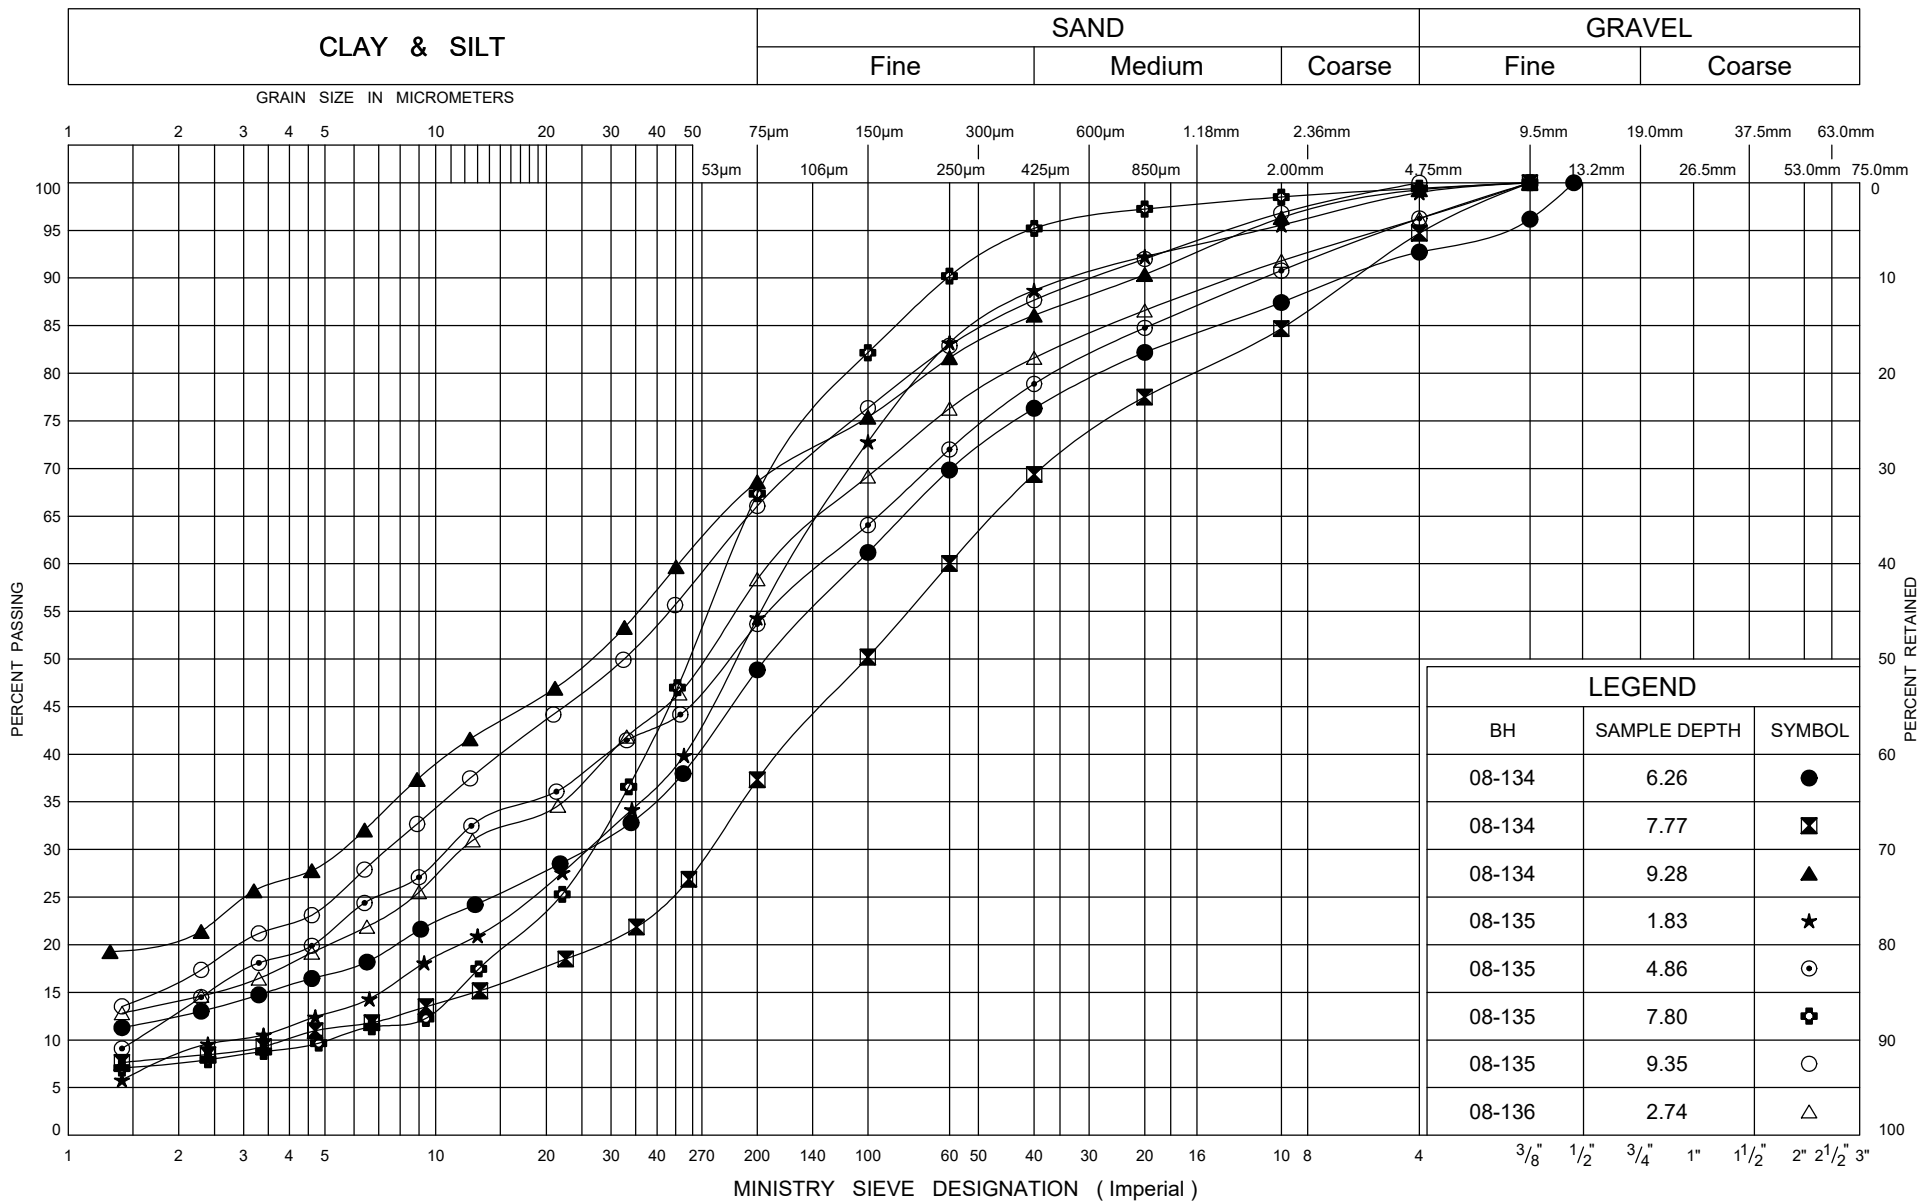


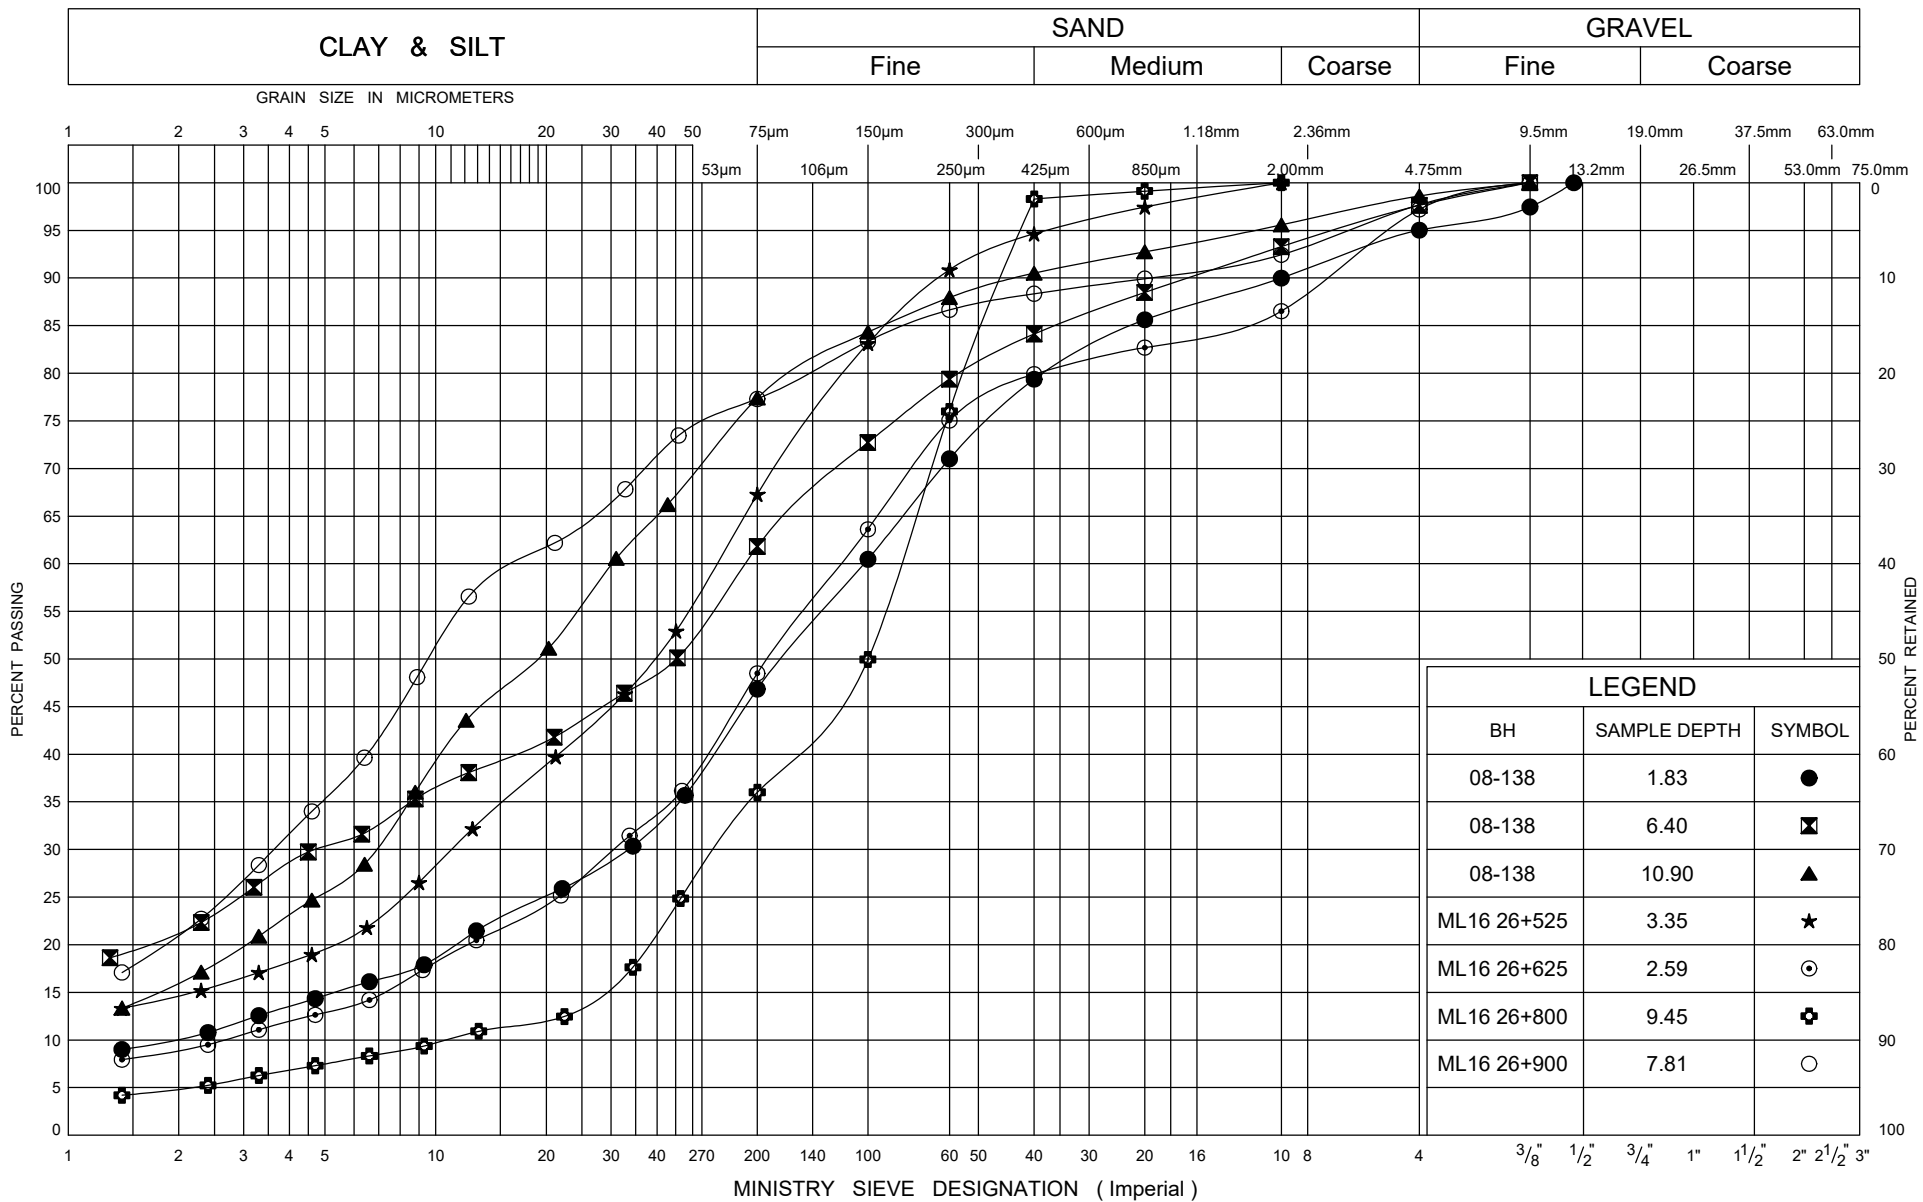




FIG No B10

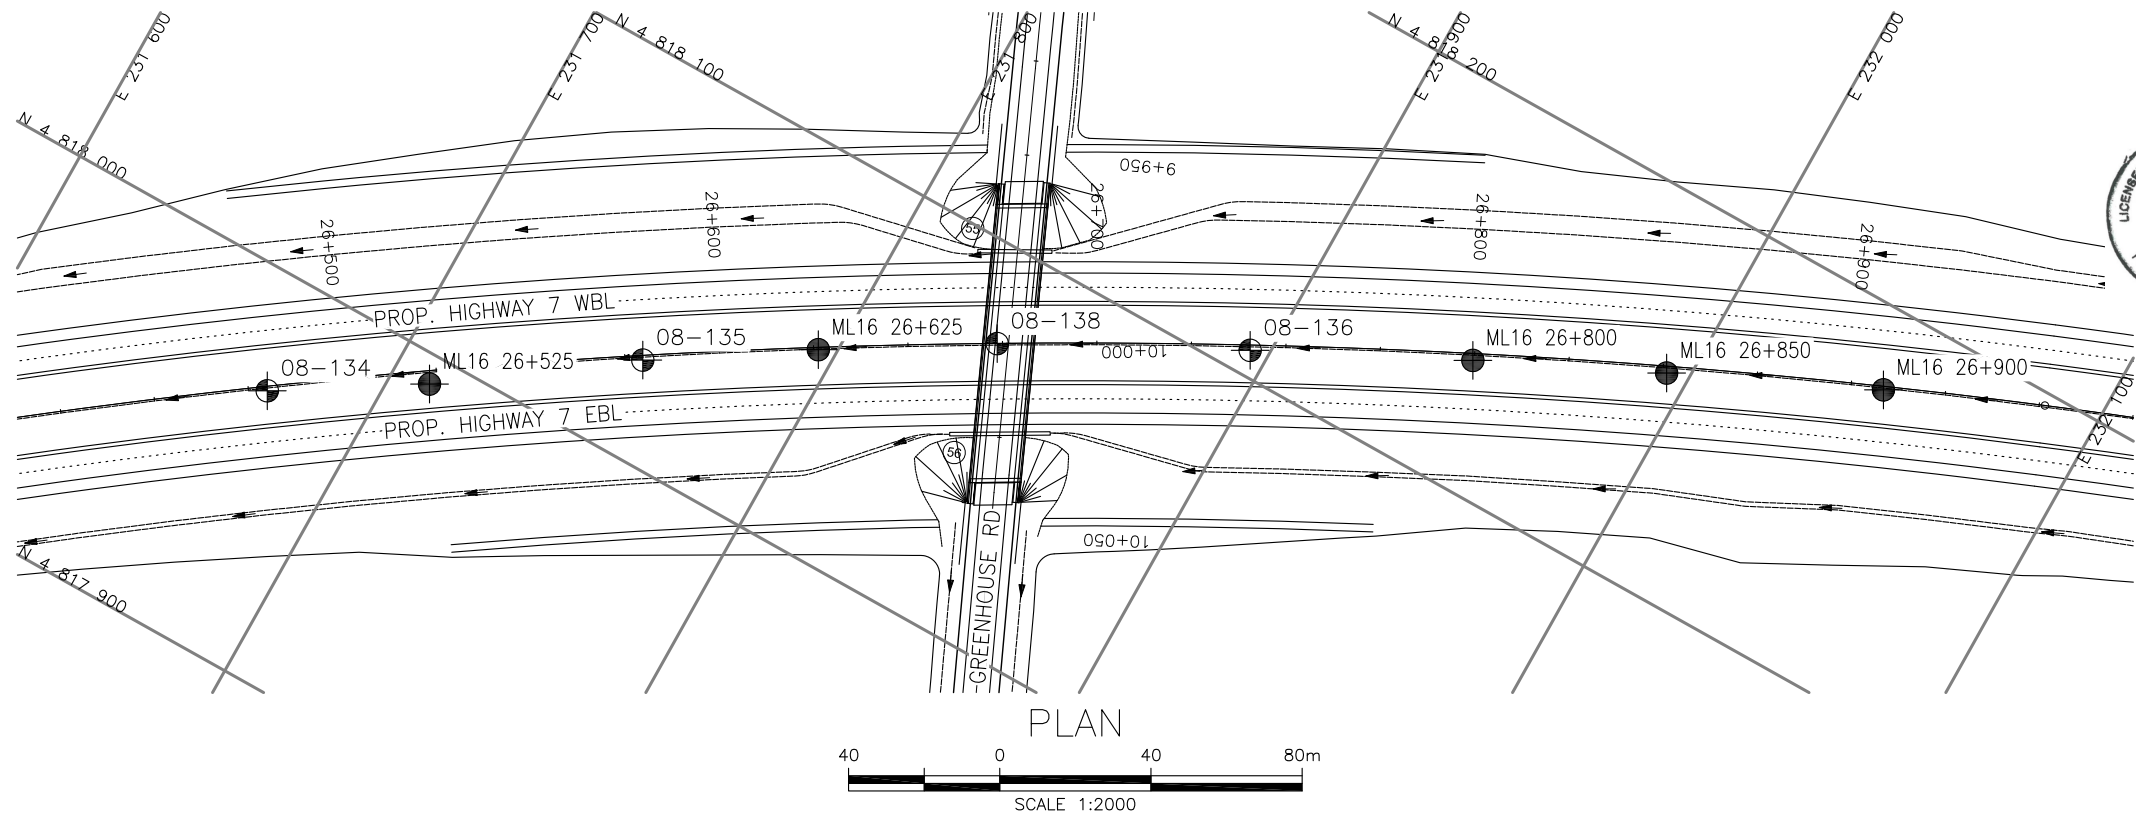GWP 408-88-00



METRIC
DIMENSIONS ARE IN METRES
AND/OR MILLIMETRES
UNLESS OTHERWISE SHOWN




CONT No
GWP No 408-88-00

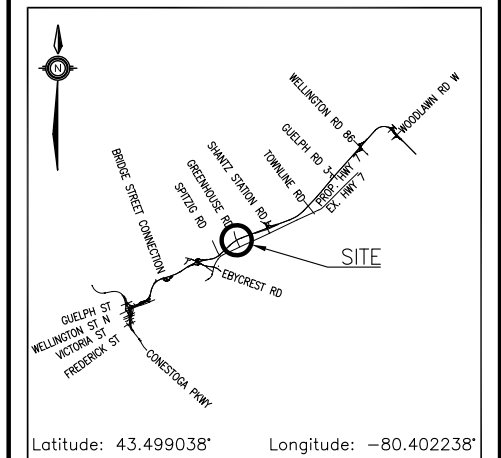HIGHWAY 7
MAINLINE CUT
26+450 TO 26+950
BOREHOLE LOCATIONS AND SOIL STRATA








THURBER ENGINEERING LTD.



KEYPLAN


LEGEND

	Borehole (Current Investigation)			
	Borehole (2008 Investigation)			
N	Blows /0.3m (Std Pen Test, 475J/blow)			
CONE	Blows /0.3m (60° Cone, 475J/blow)			
PH	Pressure, Hydraulic			
	Water Level			
	Head Artesian Water			
	Piezometer			
90%	Rock Quality Designation (RQD)			
A/R	Auger Refusal			
NO	ELEVATION	NORTHING	EASTING	
ML16 26+525	330.2	4 817 992.7	231	710.1
ML16 26+625	332.9	4 818 050.9	231	795.4
ML16 26+800	330.1	4 818 133.2	231	947.9
ML16 26+850	330.5	4 818 155.3	231	994.2
ML16 26+900	331.6	4 818 179.5	232	046.4
08-134	327.9	4 817 970.1	231	673.6
08-135	331.7	4 818 025.8	231	756.2
08-136	330.5	4 818 106.6	231	895.2
08-138	332.5	4 818 075.5	231	835.9


-NOTES-

- 1) The boundaries between soil strata have been established only at Borehole locations. Between Boreholes the boundaries are assumed from geological evidence.
- 2) This drawing is for subsurface information only. Surface details and features are for conceptual illustration.
- 3) Coordinate system is MTM NAD 83 Zone 10.

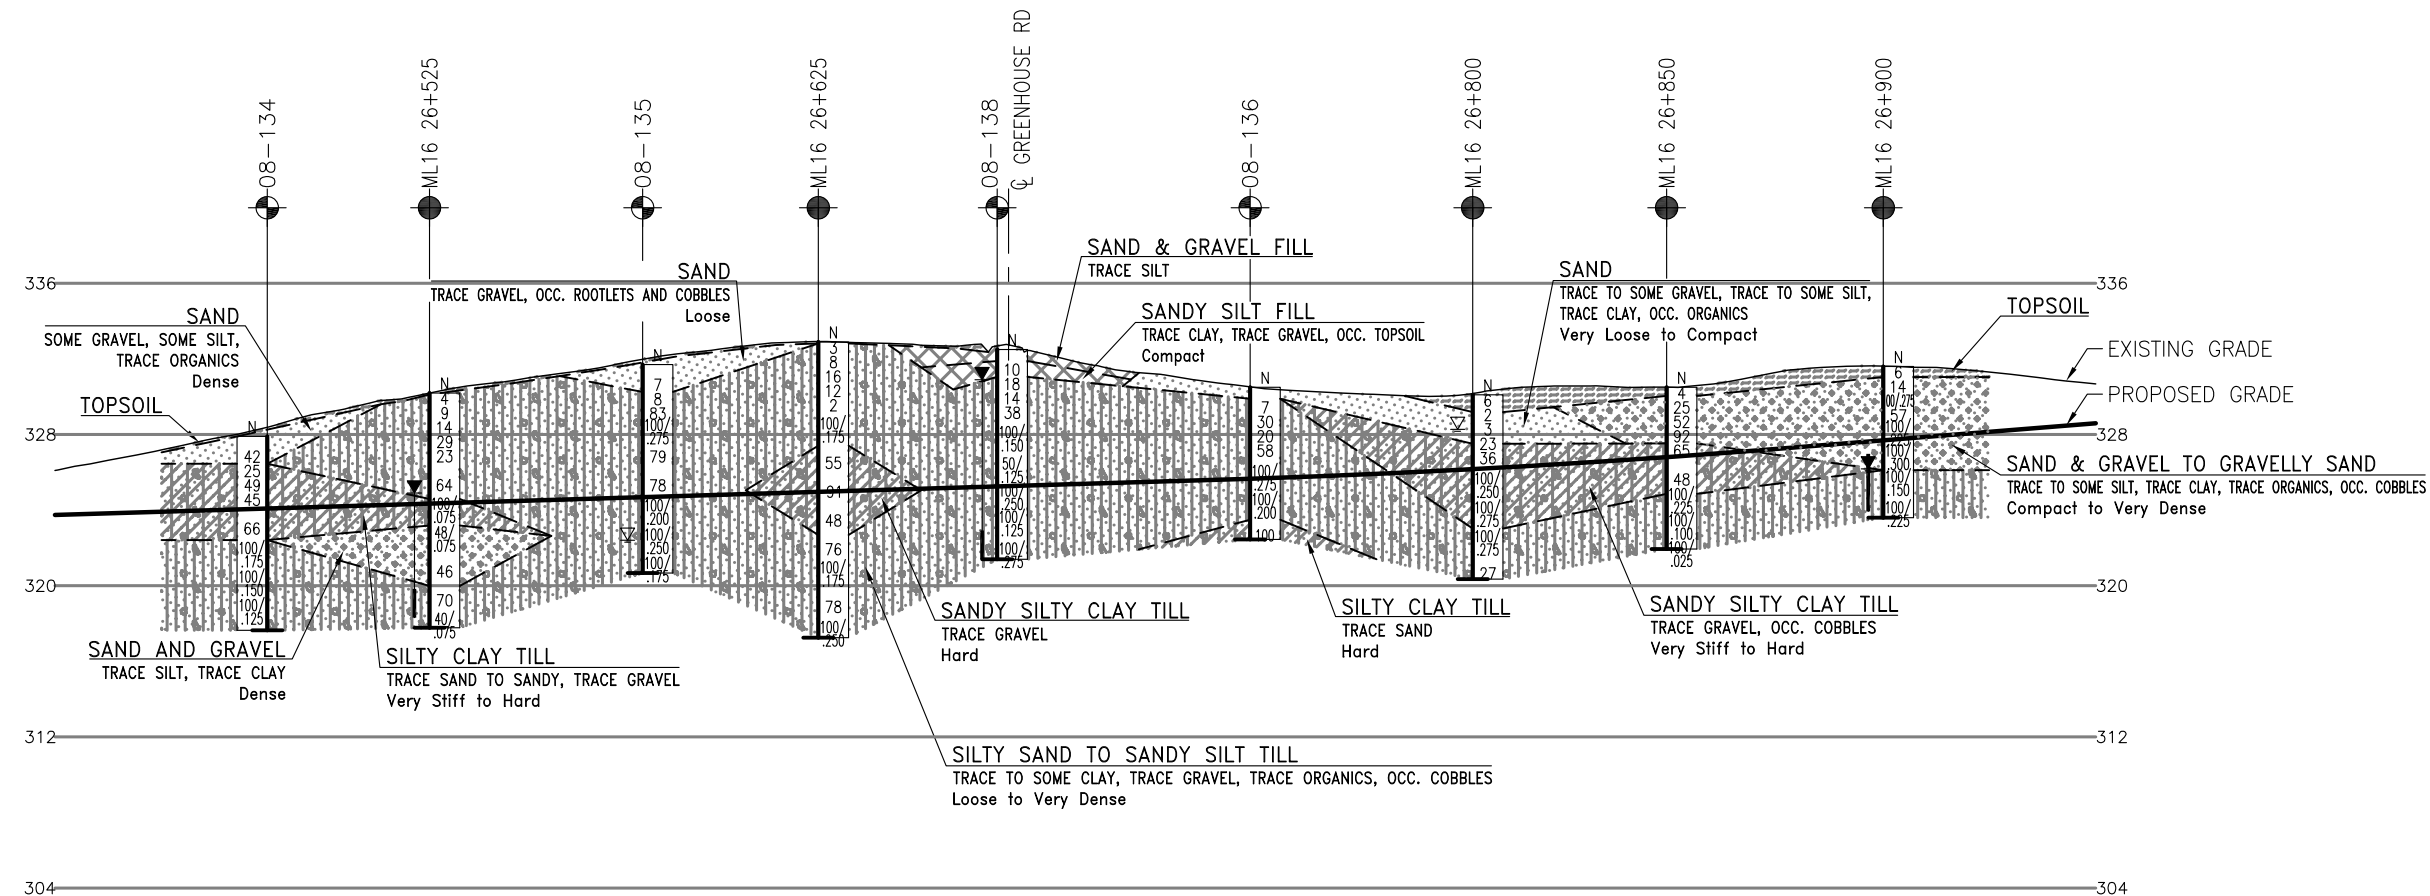GEOCRES No. 40P09-067



PROFILE ALONG PROPOSED HIGHWAY 7

[illegible]



Appendix C.

Highway 7: Station 27+350 – 27+900 (08-149, 08-150, 08-151, ML16 27+675)

RECORD OF BOREHOLE No 08-149

1 OF 1

METRIC

GWP# 408-88-00 LOCATION N 4 818 407.3 E 232 646.0 ORIGINATED BY SLL
 DIST HWY 7 - New BOREHOLE TYPE Hollow Stem Augers COMPILED BY WM
 DATUM Geodetic DATE 2008.05.27 - 2008.05.27 LATITUDE LONGITUDE CHECKED BY RPR

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT				UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa						
325.4	GROUND SURFACE							20 40 60 80 100						
0.0	SAND , some gravel, some silt Loose Brown Moist						325							
			1	SS	9							○		
							324							
			2	SS	8							○		
323.2														
2.2	Sandy SILT , trace to some clay, trace gravel Compact to Very Dense Brown to Grey Wet (TILL)						323					○		
			4	S	38		322					○		1 30 63 6
	Layer of sand: (600mm)						321					○		8 80 12 (SI+CL)
			5	SS	55									
							320							
	Layer of sandy silty clay											○		
318.9			6	SS	100		319					○	11	3 31 50 16
6.6	END OF BOREHOLE AT 6.6m. BOREHOLE OPEN TO 4.6m AND WATER LEVEL AT 4.3m UPON COMPLETION. BOREHOLE BACKFILLED WITH BENTONITE BENSEAL TO SURFACE.													

+³, ×³: Numbers refer to
Sensitivity

20
15
10







(%) STRAIN AT FAILURE

RECORD OF BOREHOLE No 08-150

1 OF 1

METRIC

GWP# 408-88-00 LOCATION N 4 818 432.6 E 232 715.8 ORIGINATED BY SLL
 DIST HWY 7 - New BOREHOLE TYPE Hollow Stem Augers COMPILED BY WM
 DATUM Geodetic DATE 2008.05.29 - 2008.05.29 LATITUDE LONGITUDE CHECKED BY RPR

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)					
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa											
								20 40 60 80 100											
323.0	GROUND SURFACE																		
0.0	PEAT , fibrous, occasional roots and wood fragments Brown (800mm)		1	AS	-		322												
322.2																			
0.8	Clayey SILT , some sand Firm to Stiff Dark Brown Moist		1	SS	4														
			2	SS	12				321										
320.8																			
2.2	Sandy SILT , trace clay Compact Brown Wet		3	SS	22		320												
320.0																			
3.0	SAND and GRAVEL , trace silt, trace clay Compact to Dense Grey Wet		4	SS	33		319												
			5	SS	26		318												
317.4																			
5.6	SAND , some silt Compact Grey Wet		6	SS	20		317												
316.3																			
6.7	END OF BOREHOLE AT 6.7m. WATER LEVEL AT 0.5m UPON COMPLETION OF DRILLING. BOREHOLE BACKFILLED WITH BENTONITE BENSEAL TO SURFACE.																		

ONTMT452 2020LIBRARY(MTO) - COPY.GLB MTO-11375(GINTDATA).GPJ 7/18/23

RECORD OF BOREHOLE No 08-151

1 OF 1

METRIC

GWP# 408-88-00 LOCATION N 4 818 463.1 E 232 795.4 ORIGINATED BY SLL
 DIST HWY 7 - New BOREHOLE TYPE Hollow Stem Augers COMPILED BY WM
 DATUM Geodetic DATE 2008.05.29 - 2008.05.29 LATITUDE LONGITUDE CHECKED BY RPR

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT				PLASTIC LIMIT NATURAL MOISTURE CONTENT LIQUID LIMIT			UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa ○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL × LAB VANE				WATER CONTENT (%) w _P w w _L					
322.4	GROUND SURFACE							20	40	60	80	100					
0.0	PEAT , wood fragments Black (600)		1	AS	-		322										
321.8																	
0.6	Gravelly SAND , some silt, some clay Compact Brown Moist		1	SS	10		321										
			2	SS	27		320										
			3	SS	19												
319.4																	
3.0	Sandy SILT , some clay, trace gravel Compact to Very Dense Grey Moist (TILL)		4	SS	14		319										
							318										
			5	SS	100/ .150												
							317										
316.1			6	SS	100/ .150												
6.2	END OF BOREHOLE AT 6.2m. BOREHOLE OPEN TO 1.9m AND WATER LEVEL AT 1.9m UPON COMPLETION. BOREHOLE BACKFILLED WITH BENTONITE BENSEAL TO SURFACE.				.150												

ONTMT452 2020LIBRARY(MTO) - COPY.GLB MTO-11375(GINTDATA).GPJ 7/18/23

RECORD OF BOREHOLE No ML16 27+675 1 OF 1 METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 818 447.2 E 232 761.9 ORIGINATED BY JPL
 DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MP
 DATUM Geodetic DATE 2018.07.11 - 2018.07.12 LATITUDE 43.502474 LONGITUDE -80.390839 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa ○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL × LAB VANE						
322.7	GROUND SURFACE													
0.0	TOPSOIL: (700mm)		1	SS	2									187
322.0							322							
0.7	Silty SAND , trace clay, trace gravel, occasional cobbles Compact to Very Dense Brown to Grey Moist to Wet Auger grinding at 1.2m		2	SS	57									
			3	SS	12		321							
			4	SS	36		320							
	Auger grinding at 2.7m													
319.6														
3.1	Silty CLAY , some sand, trace gravel Stiff to Hard Grey Moist		5	SS	15									
							319							
			6	SS	12		318							
							317							
			7	SS	41									
							316							
			8	SS	43		315							
314.5														
8.2	END OF BOREHOLE AT 8.2m. Piezometer installation consists of 25mm diameter Schedule 40 PVC pipe with a 1.5m slotted screen.													
	WATER LEVEL READINGS DATE DEPTH(m) ELEV.(m) 2018.08.31 0.5 322.3													

+³, ×³: Numbers refer to
Sensitivity 20
15 10 5 0
(%) STRAIN AT FAILURE



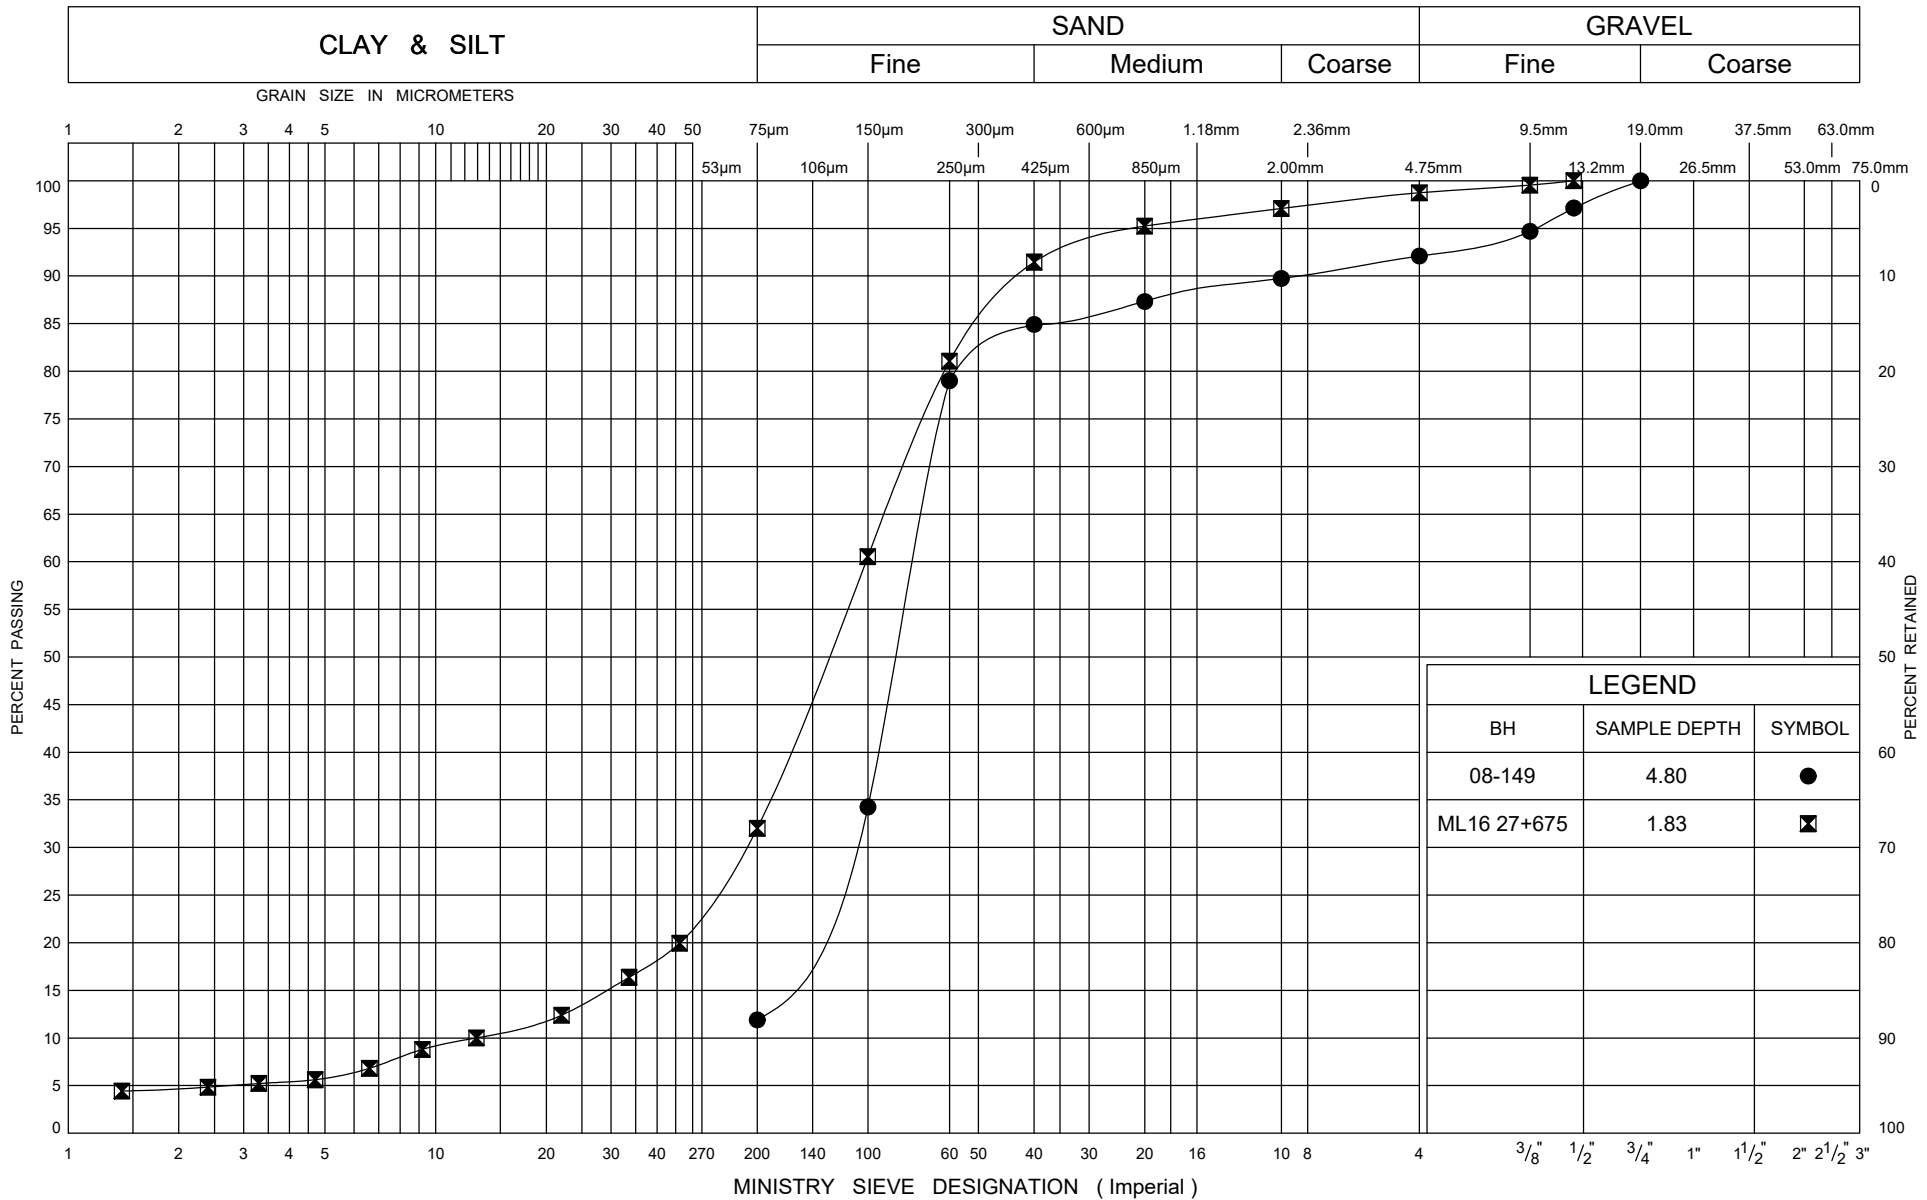




FIG No C2
GWP 408-88-00

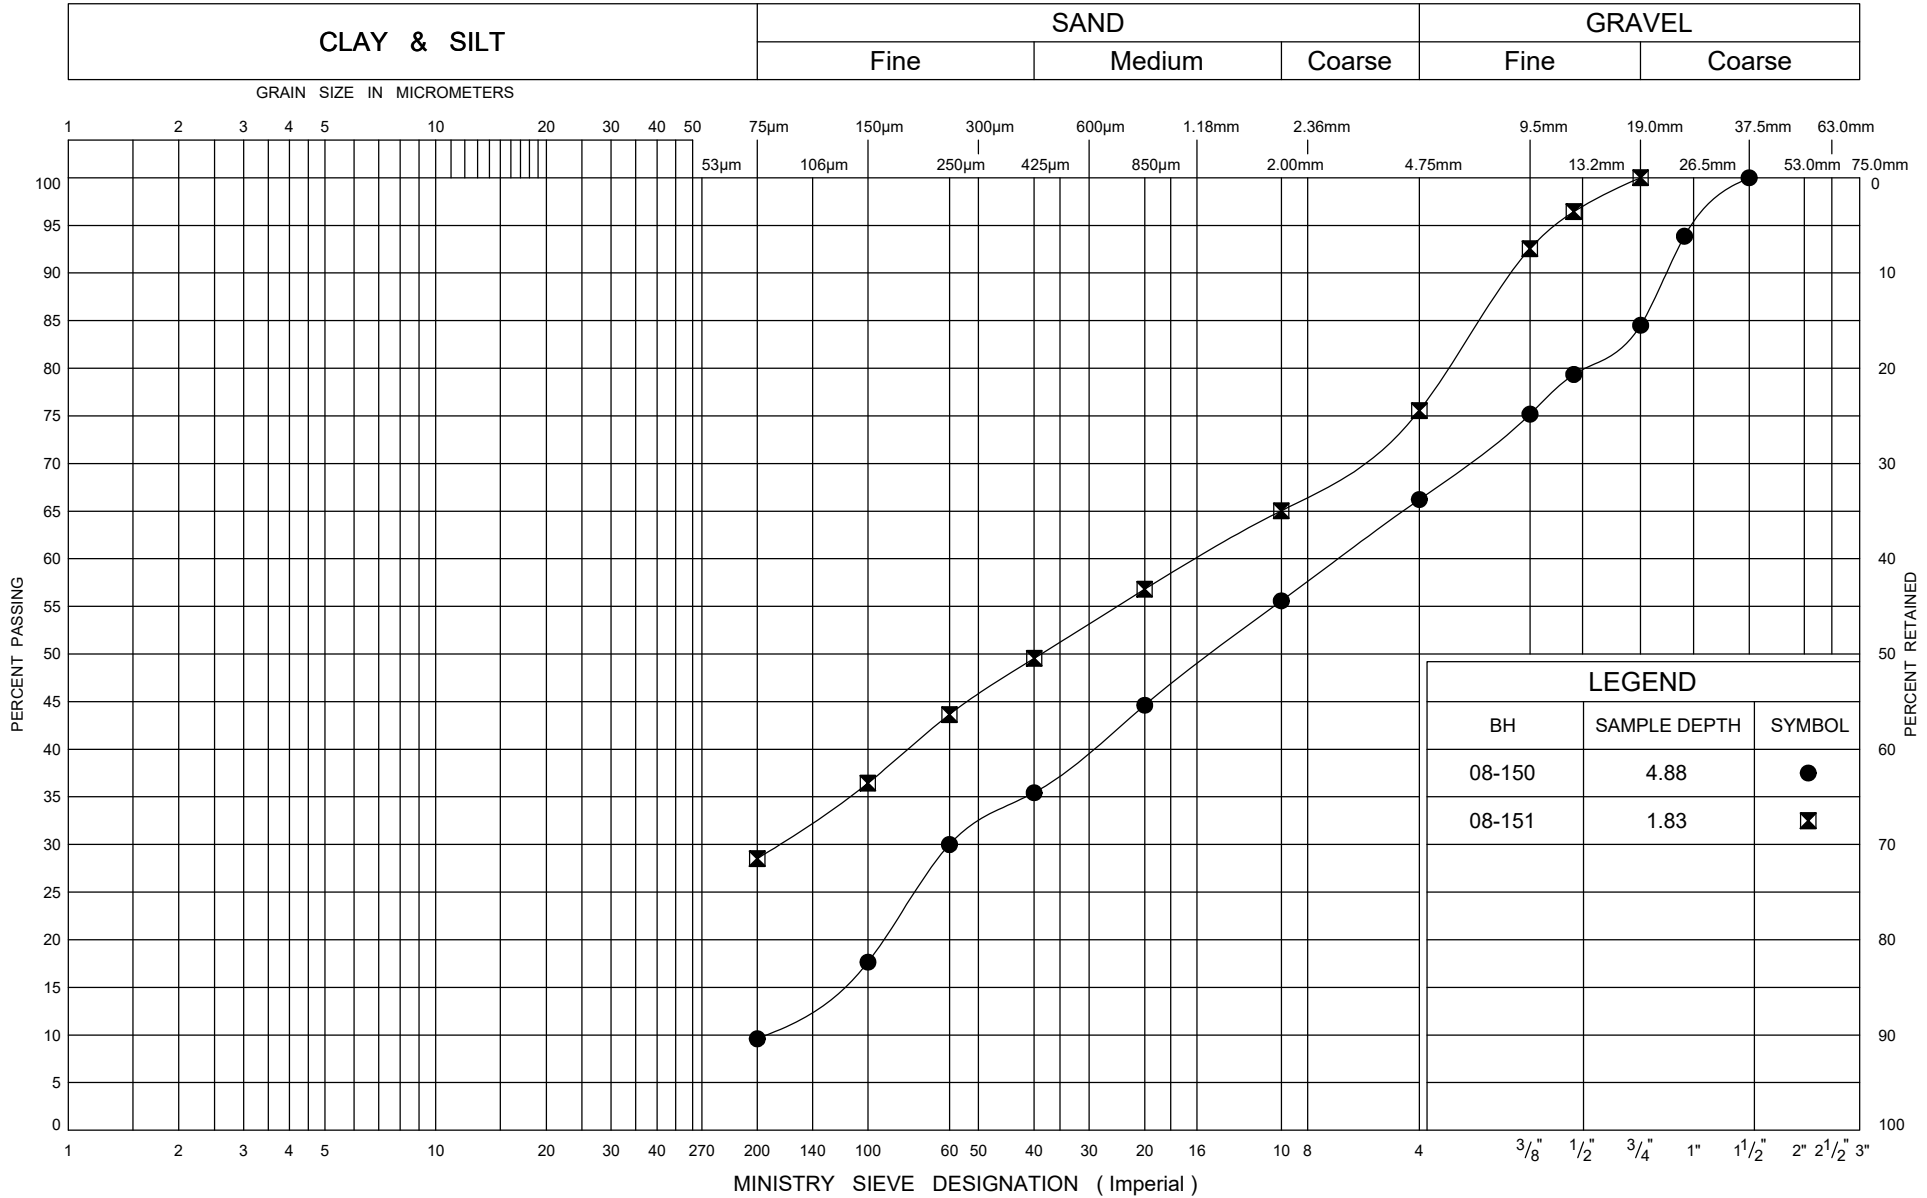

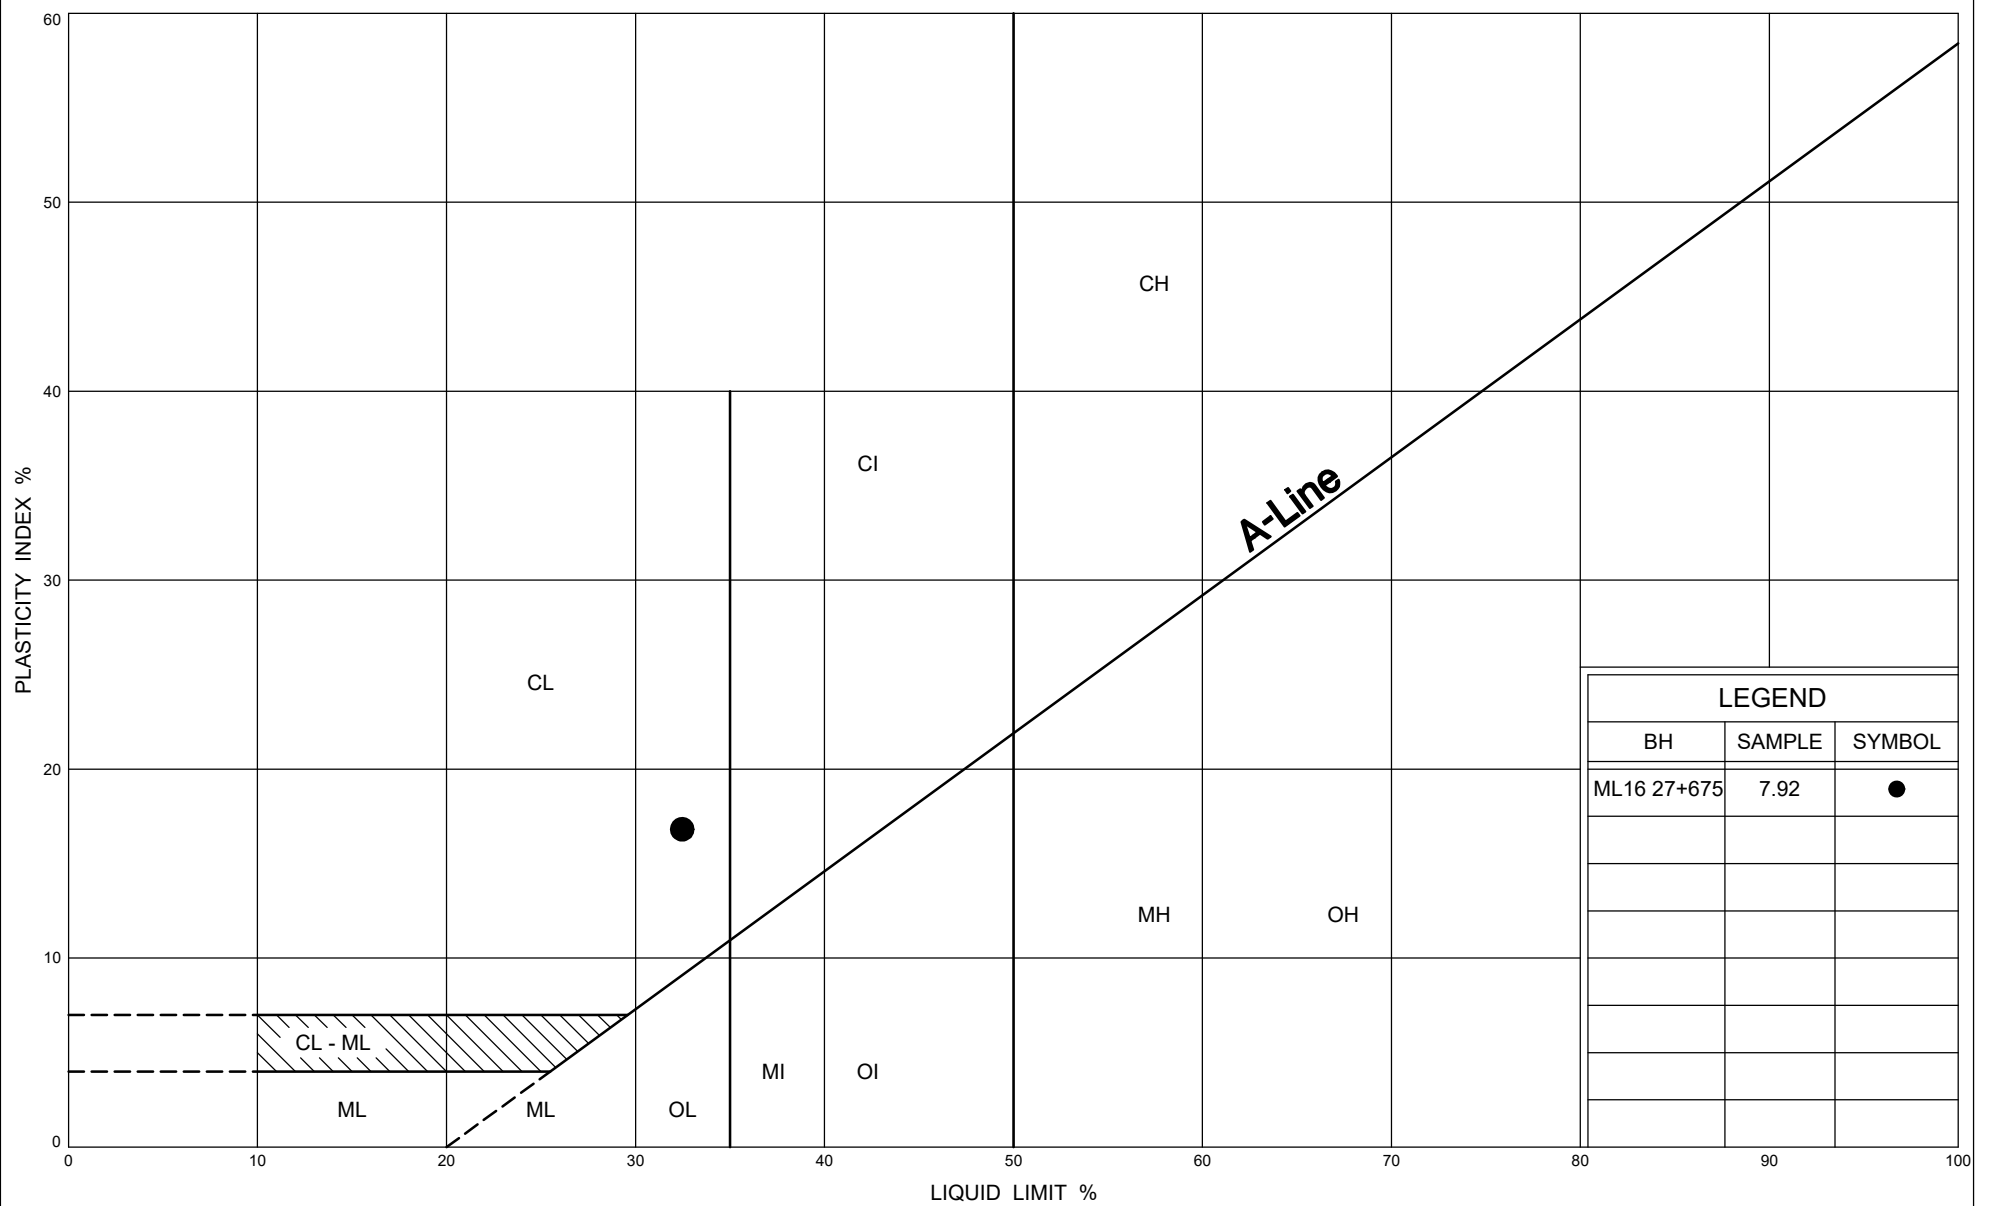

Ministry of
Transportation

PLASTICITY CHART


Silty CLAY

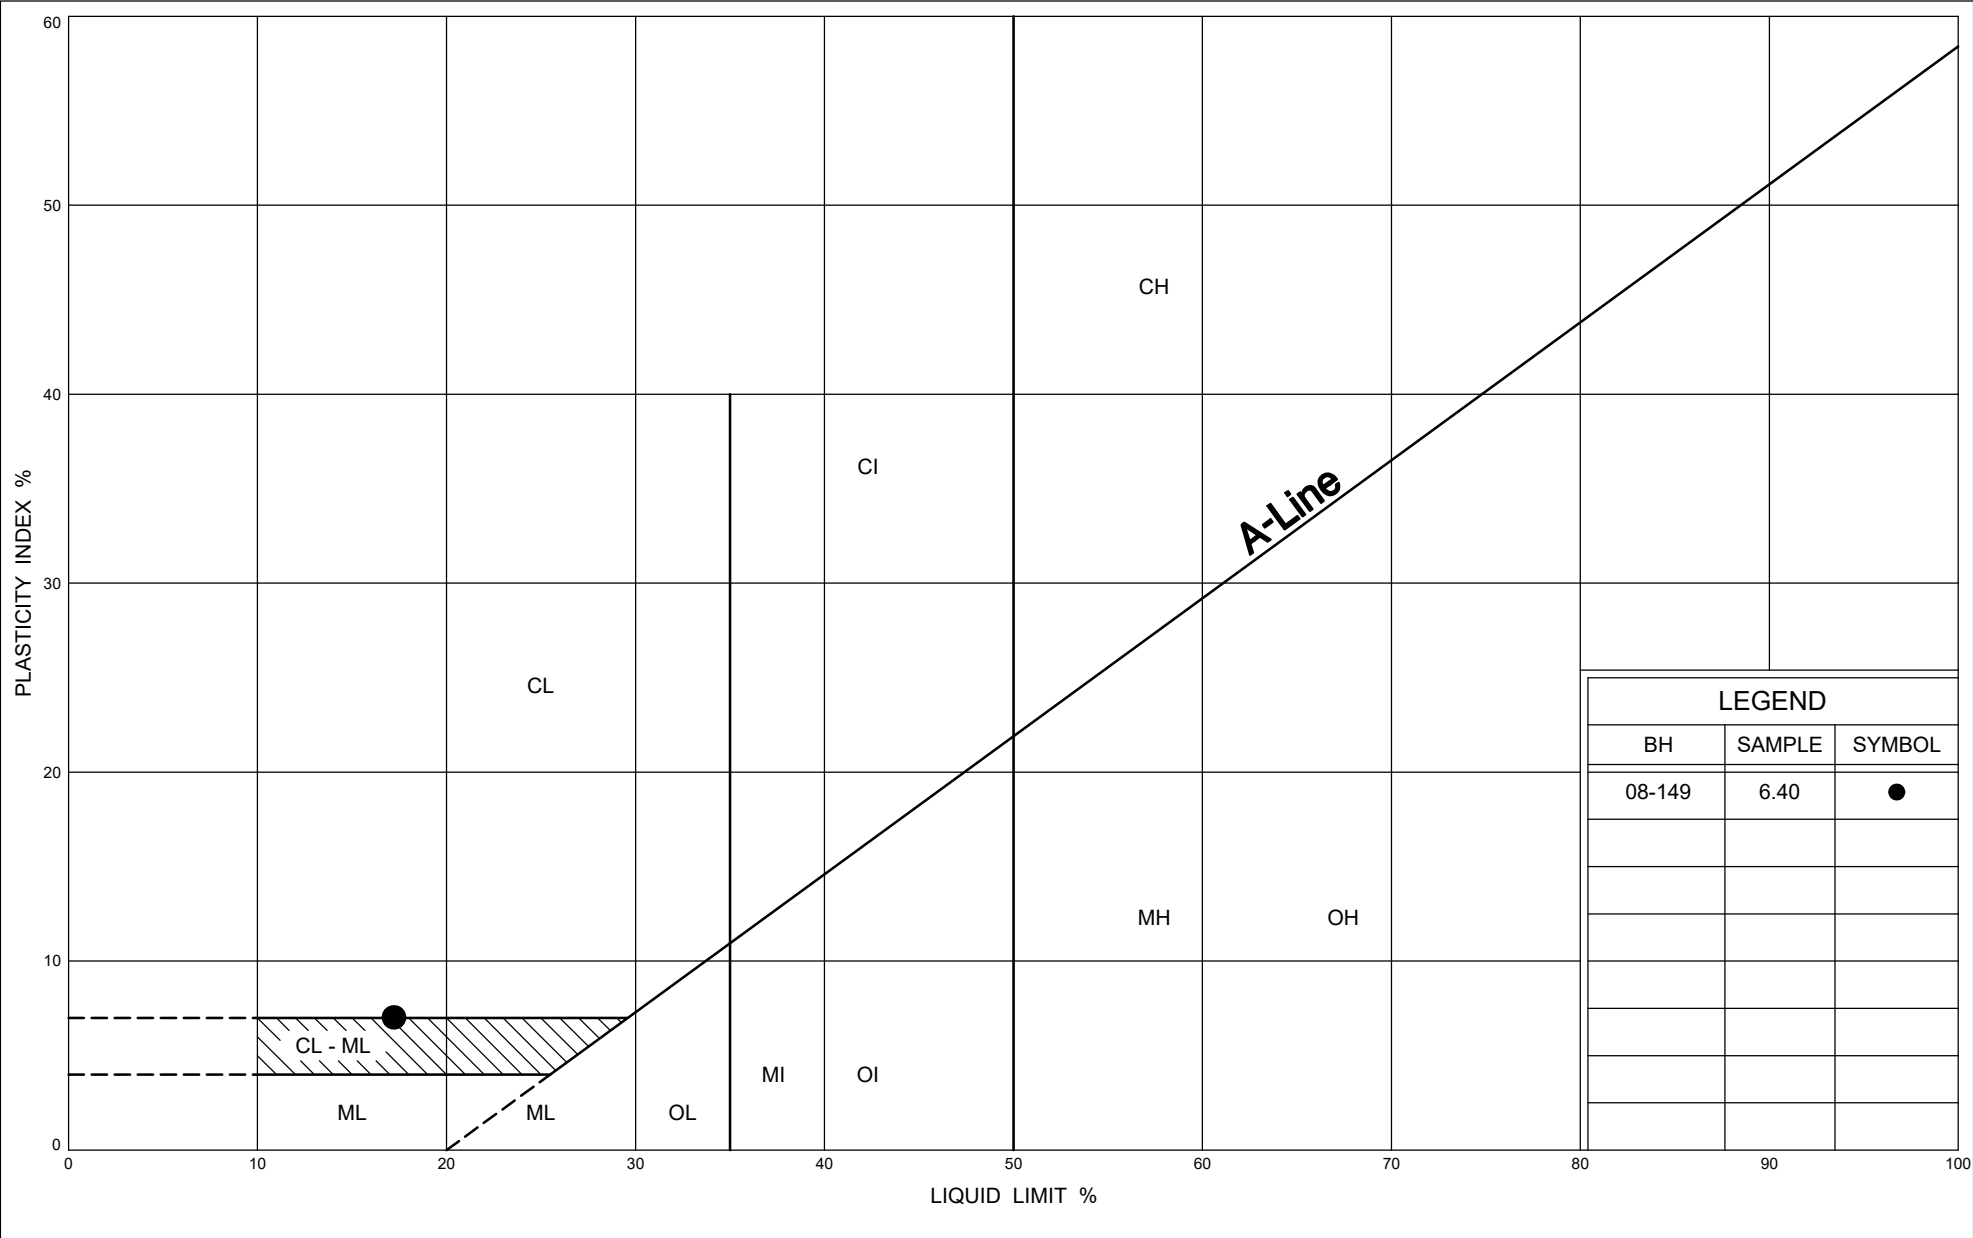FIG No C4

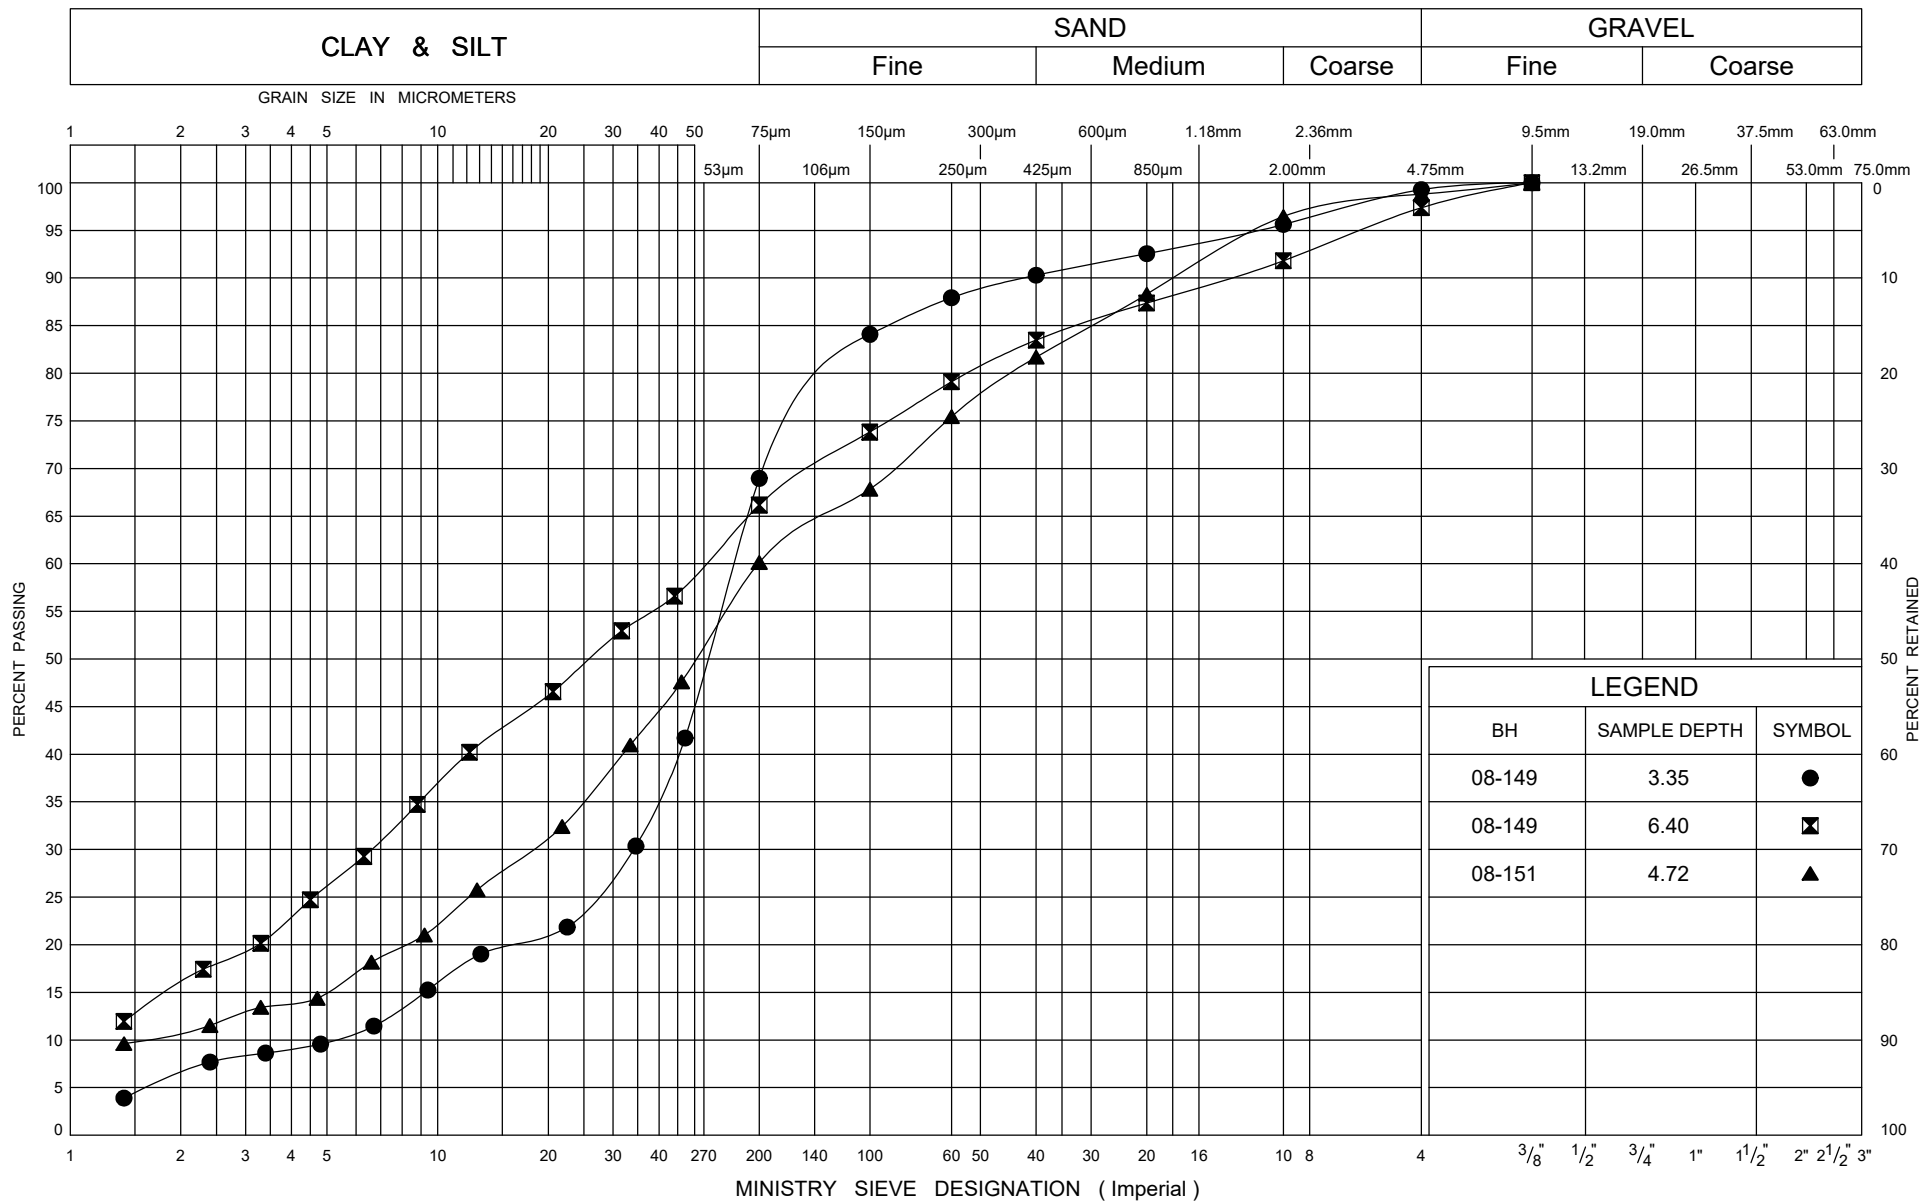
GWP 408-88-00

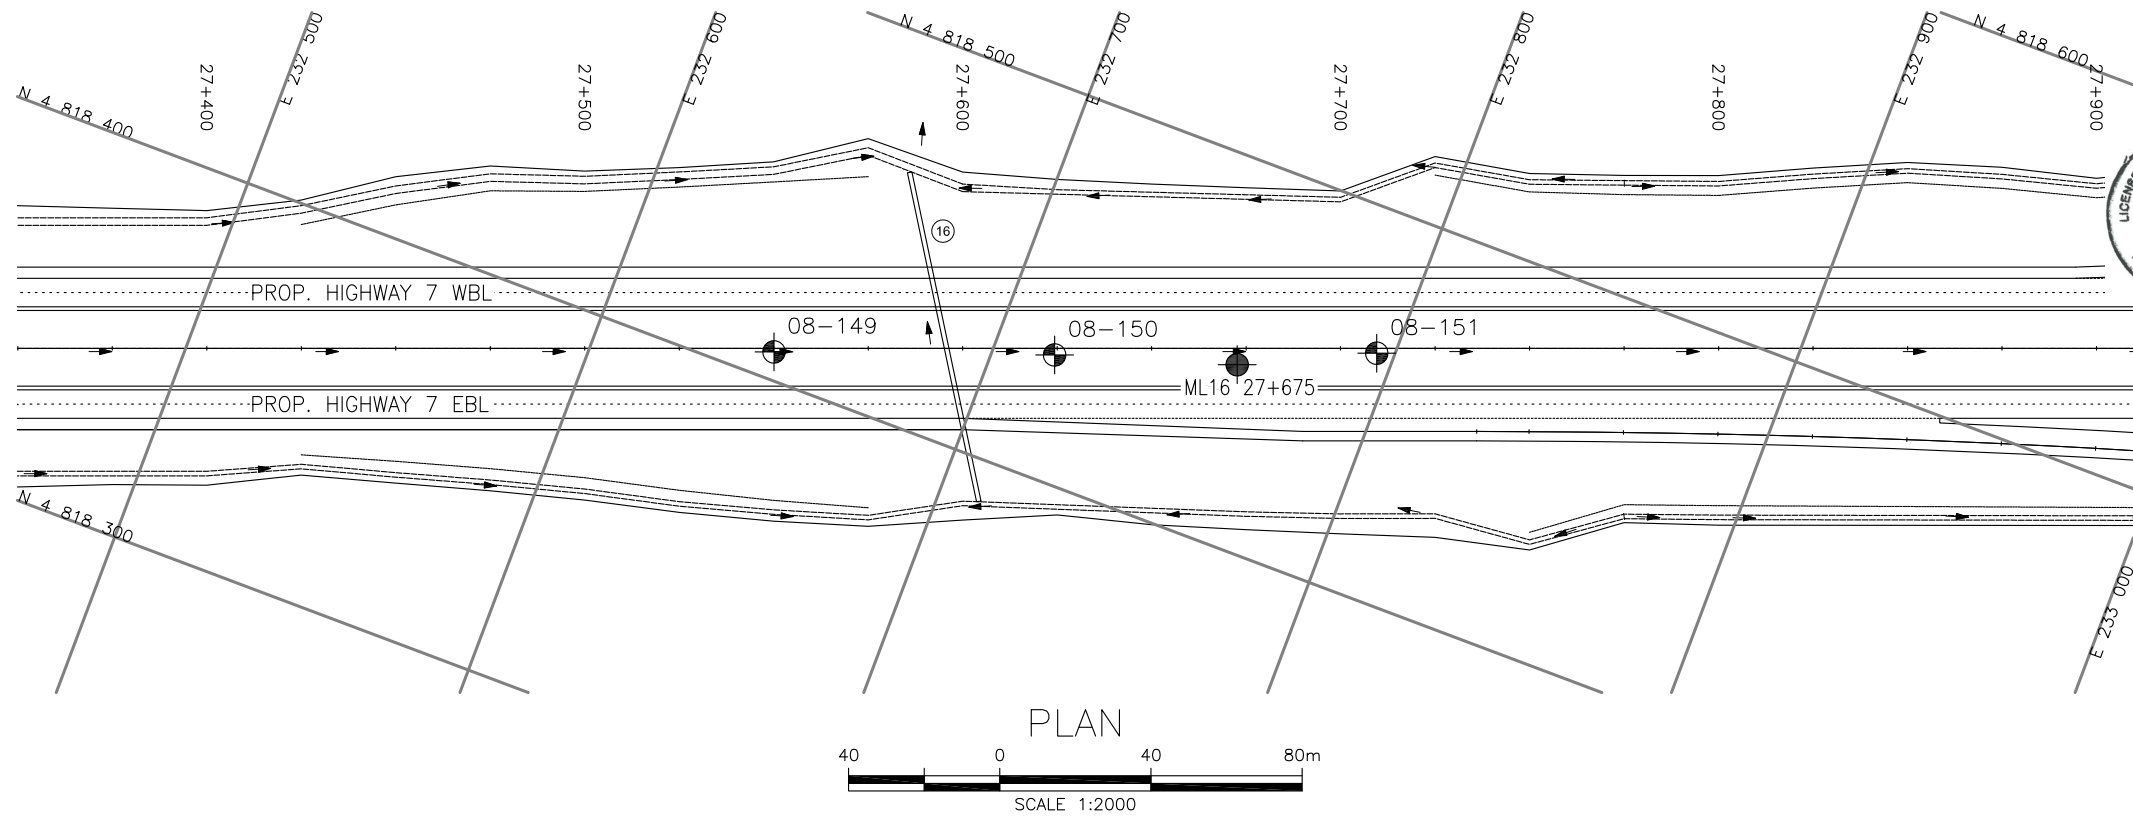


FIG No C5
GWP 408-88-00



ONTARIO MOT GRAIN SIZE 3 MTO-11375(GINTDATA)\GPJ_ONTARIO MOT.GDT 3/12/20





METRIC
DIMENSIONS ARE IN METRES
AND/OR MILLIMETRES
UNLESS OTHERWISE SHOWN




CONT No
GWP No 408-88-00

HIGHWAY 7
MAINLINE FILL
27+350 TO 27+900
BOREHOLE LOCATIONS AND SOIL STRATA



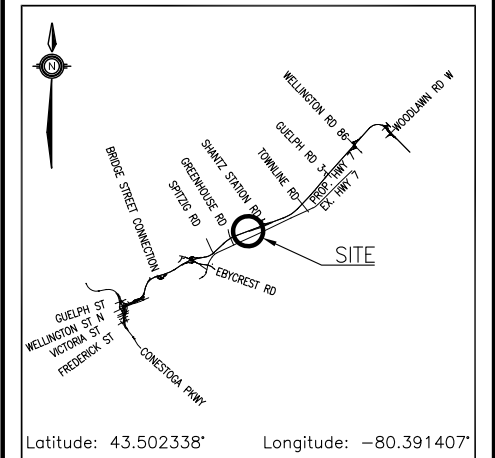THURBER ENGINEERING LTD.



KEYPLAN

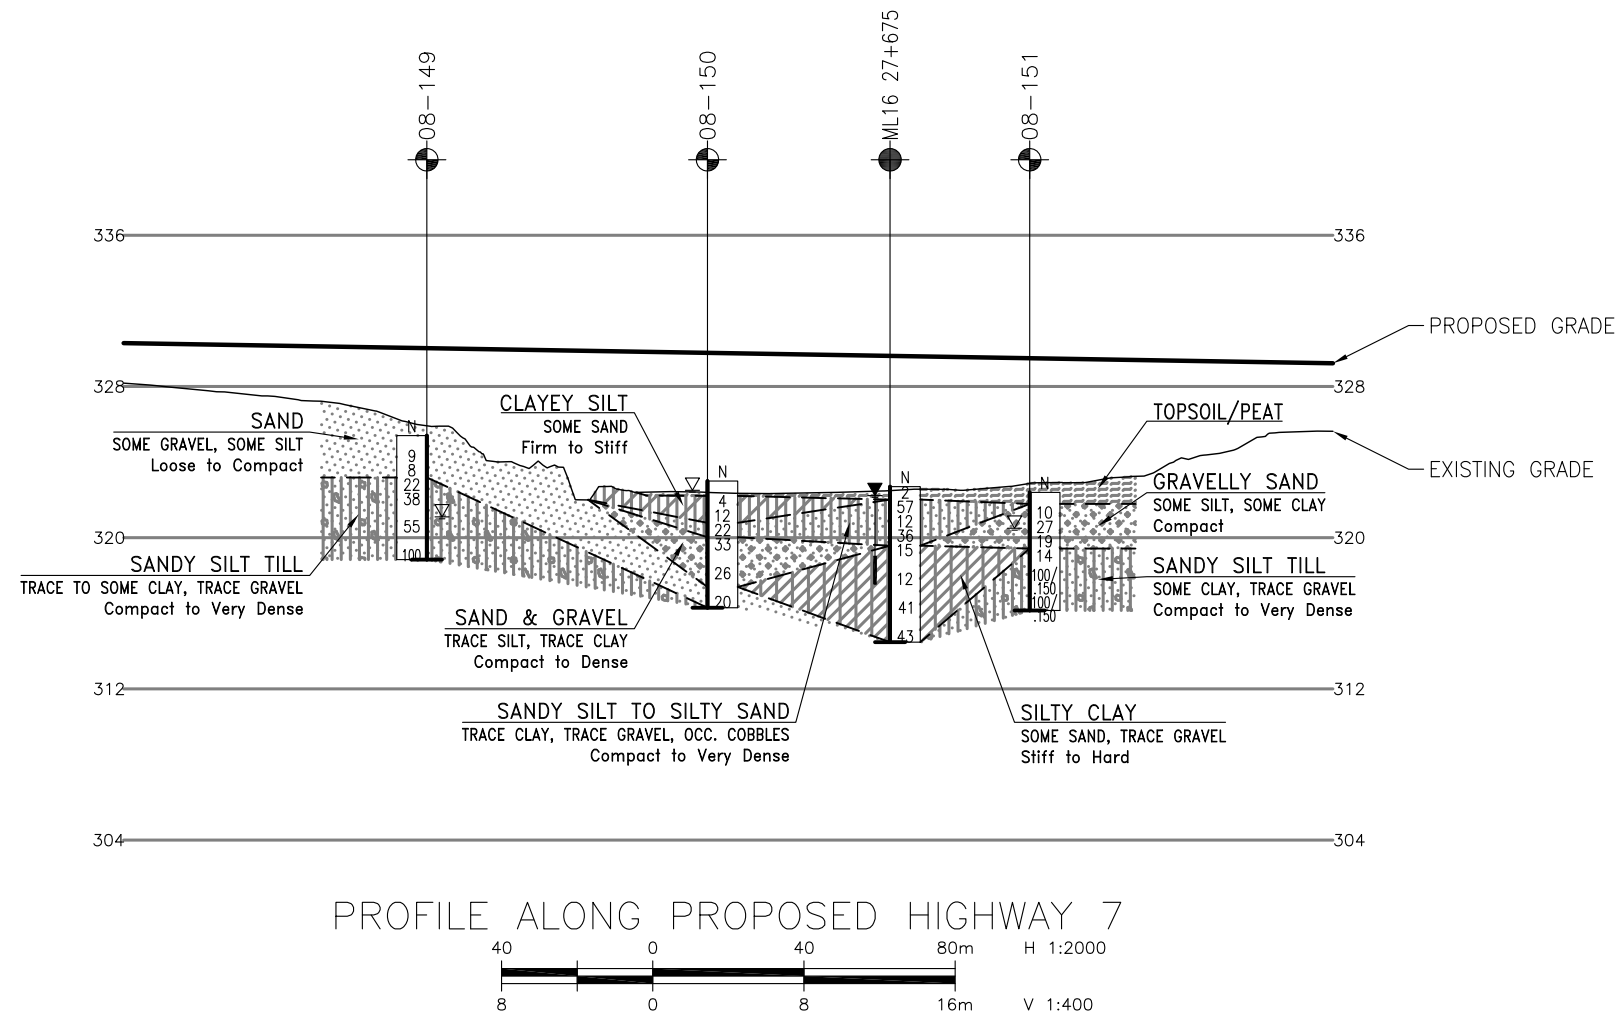
LEGEND

[illegible]

-NOTES-

- 1) The boundaries between soil strata have been established only at Borehole locations. Between Boreholes the boundaries are assumed from geological evidence.
- 2) This drawing is for subsurface information only. Surface details and features are for conceptual illustration.
- 3) Coordinate system is MTM NAD 83 Zone 10.

GEOCRES No. 40P09-067



PROFILE ALONG PROPOSED HIGHWAY 7

[illegible]



Appendix D.

Regional Road 30 (Shantz Station Road) S-W Ramp: Station 28+400 – 28+500 (08-156, 08-158, SH16-02)

RECORD OF BOREHOLE No 08-156

1 OF 1

METRIC

GWP# 408-88-00 LOCATION N 4 818 791.8 E 233 498.4 ORIGINATED BY LG
 DIST HWY 7 - New BOREHOLE TYPE Solid Stem Augers COMPILED BY AN
 DATUM Geodetic DATE 2008.12.02 - 2008.12.02 LATITUDE LONGITUDE CHECKED BY MEF

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT				PLASTIC LIMIT NATURAL MOISTURE CONTENT LIQUID LIMIT			UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)			
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa				WATER CONTENT (%)							
332.7	GROUND SURFACE							20	40	60	80	100	W _P	W	W _L	GR	SA	SI	CL
0.0	Clayey SILT , trace sand, occasional rootlets, occasional organics Firm to Very Stiff Black to Brown Moist		1	SS	6														
331.5			2	SS	15														
1.2	SAND , trace silt to silty, trace gravel to gravelly Compact to Dense Brown to Grey Moist		3	SS	36														21 56 23 (SH+CL)
			4	SS	27														
			5	SS	26														8 66 26 (SH+CL)
			6	SS	80														
			7	SS	55														

+³, ×³: Numbers refer to Sensitivity 20 15 10 5 0 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No 08-158

1 OF 3

METRIC

GWP# 408-88-00 LOCATION N 4 818 713.0 E 233 462.6 ORIGINATED BY SLL
DIST HWY 7 - New BOREHOLE TYPE Hollow Stem Augers COMPILED BY WM
DATUM Geodetic DATE 2008.05.22 - 2008.05.23 LATITUDE LONGITUDE CHECKED BY RPR

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT				PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa ○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL × LAB VANE									WATER CONTENT (%)
330.0	GROUND SURFACE							20	40	60	80	100					
0.0	SAND , some gravel, some clay, occasional topsoil Dark Brown (FILL)													○			
329.5																	
0.5	Silty CLAY , some sand to sandy, trace gravel, occasional cobbles Stiff to Hard Brown to Grey Moist (TILL)		1	SS	14									○			
			2	SS	40									○			
			3	SS	67									○			
			4	SS	74									○	—		2 22 48 28
			5	SS	46									○			
			6	SS	83									○			
			7	SS	61									○	—		1 18 48 33
320.7	Layer of silt													○			1 16 77 6
9.3	Clayey SILT , trace sand, trace gravel Very Stiff to Hard Grey (TILL)		8	SS	20									○			

Continued Next Page

+³, ×³: Numbers refer to
Sensitivity

20
15
10

(%) STRAIN AT FAILURE

METRIC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	DYNAMIC CONE PENETRATION RESISTANCE PLOT			UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL			
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES		SHEAR STRENGTH kPa					WATER CONTENT (%)		
							○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL × LAB VANE					w _p w w _L		
	Continued From Previous Page					20 40 60 80 100								
316.7 13.3	Clayey SILT , trace sand, trace gravel Very Stiff to Hard Grey Moist (TILL)		9	SS	51							0 5 75 20		
			10	SS	125							0 7 77 16		
312.3 17.7	Silty CLAY , trace sand, trace gravel Hard Grey Moist (TILL)		11	SS	55									
			12	SS	31							1 6 35 58		
	Slow augering		13	SS	33									
	Sandy SILT , some clay, trace gravel Very Dense Grey Moist (TILL)		14	SS	100/ .175							4 42 40 14		
	Layer of clayey silt and sand													
			15	SS	100/									



+³, ×³: Numbers refer to Sensitivity

RECORD OF BOREHOLE No 08-158

3 OF 3

METRIC

GWP# 408-88-00 LOCATION N 4 818 713.0 E 233 462.6 ORIGINATED BY SLL
 DIST HWY 7 - New BOREHOLE TYPE Hollow Stem Augers COMPILED BY WM
 DATUM Geodetic DATE 2008.05.22 - 2008.05.23 LATITUDE LONGITUDE CHECKED BY RPR

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa ○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL × LAB VANE						
	Continued From Previous Page				.125									
308.6	Sandy SILT , some clay, trace gravel Very Dense Grey Moist (TILL)		16	SS	100/									
21.4	END OF BOREHOLE AT 21.4m, AUGER REFUSAL ON PROBABLE BEDROCK OR BOULDER. Piezometer installation consists of 25mm diameter Schedule 40 PVC pipe with a 1.52m slotted screen. WATER LEVEL READINGS DATE DEPTH(m) ELEV.(m) 2008.05.28 6.8 323.2 2008.06.02 8.8 321.2 2008.07.15 9.0 321.0 2008.08.20 6.8 323.2				.100									

RECORD OF BOREHOLE No SH16-02

1 OF 3

METRIC

GWP# 408-88-00 LOCATION Shantz Station Road, MTM NAD 83 Zone 10: N 4 818 751.2 E 233 451.1 ORIGINATED BY OA
 DIST HWY BOREHOLE TYPE Hollow Stem Augers/NQ Coring COMPILED BY MFA
 DATUM Geodetic DATE 2017.07.25 - 2017.07.26 LATITUDE 43.505276 LONGITUDE -80.382356 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)		
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa								
330.7	GROUND SURFACE						20	40	60	80	100	PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L		
0.0	Gravelly SAND , some silt Loose to Compact Brown Moist (FILL)		1	SS	20							○				
												○				
			2	SS	8							○				
			3	SS	11							○				
328.5																
2.2	Sandy Silty CLAY , trace gravel Very Stiff to Hard Brown to Grey Moist (TILL)		4	SS	16							○				
			5	SS	40							○				
			6	SS	27							○				
			7	SS	23							○				
			8	SS	38							○				
			9	SS	78							○				

20406080100

○ UNCONFINED + FIELD VANE
● QUICK TRIAXIAL × LAB VANE

204060

W_P W W_L

WATER CONTENT (%)

GR SA SI CL

8 29 29 34

Continued Next Page

+³, ×³: Numbers refer to Sensitivity
 20
 15
 10
 (%) STRAIN AT FAILURE

METRIC

Continued Next Page

+³, ×³: Numbers refer to Sensitivity


3 OF 3


GWP#	408-88-00	LOCATION	Shantz Station Road, MTM NAD 83 Zone 10: N 4 818 751.2 E 233 451.1			ORIGINATED BY	OA			
DIST		HWY		BOREHOLE TYPE	Hollow Stem Augers/NQ Coring			COMPILED BY	MFA	
DATUM	Geodetic		DATE	2017.07.25 - 2017.07.26	LATITUDE	43.505276	LONGITUDE	-80.382356	CHECKED BY	JPL

[illegible]

ONTMT4S2 2020LIBRARY(MTO) - COPY.GLB MTO-11375(GINTDATA).GPJ 3/5/24

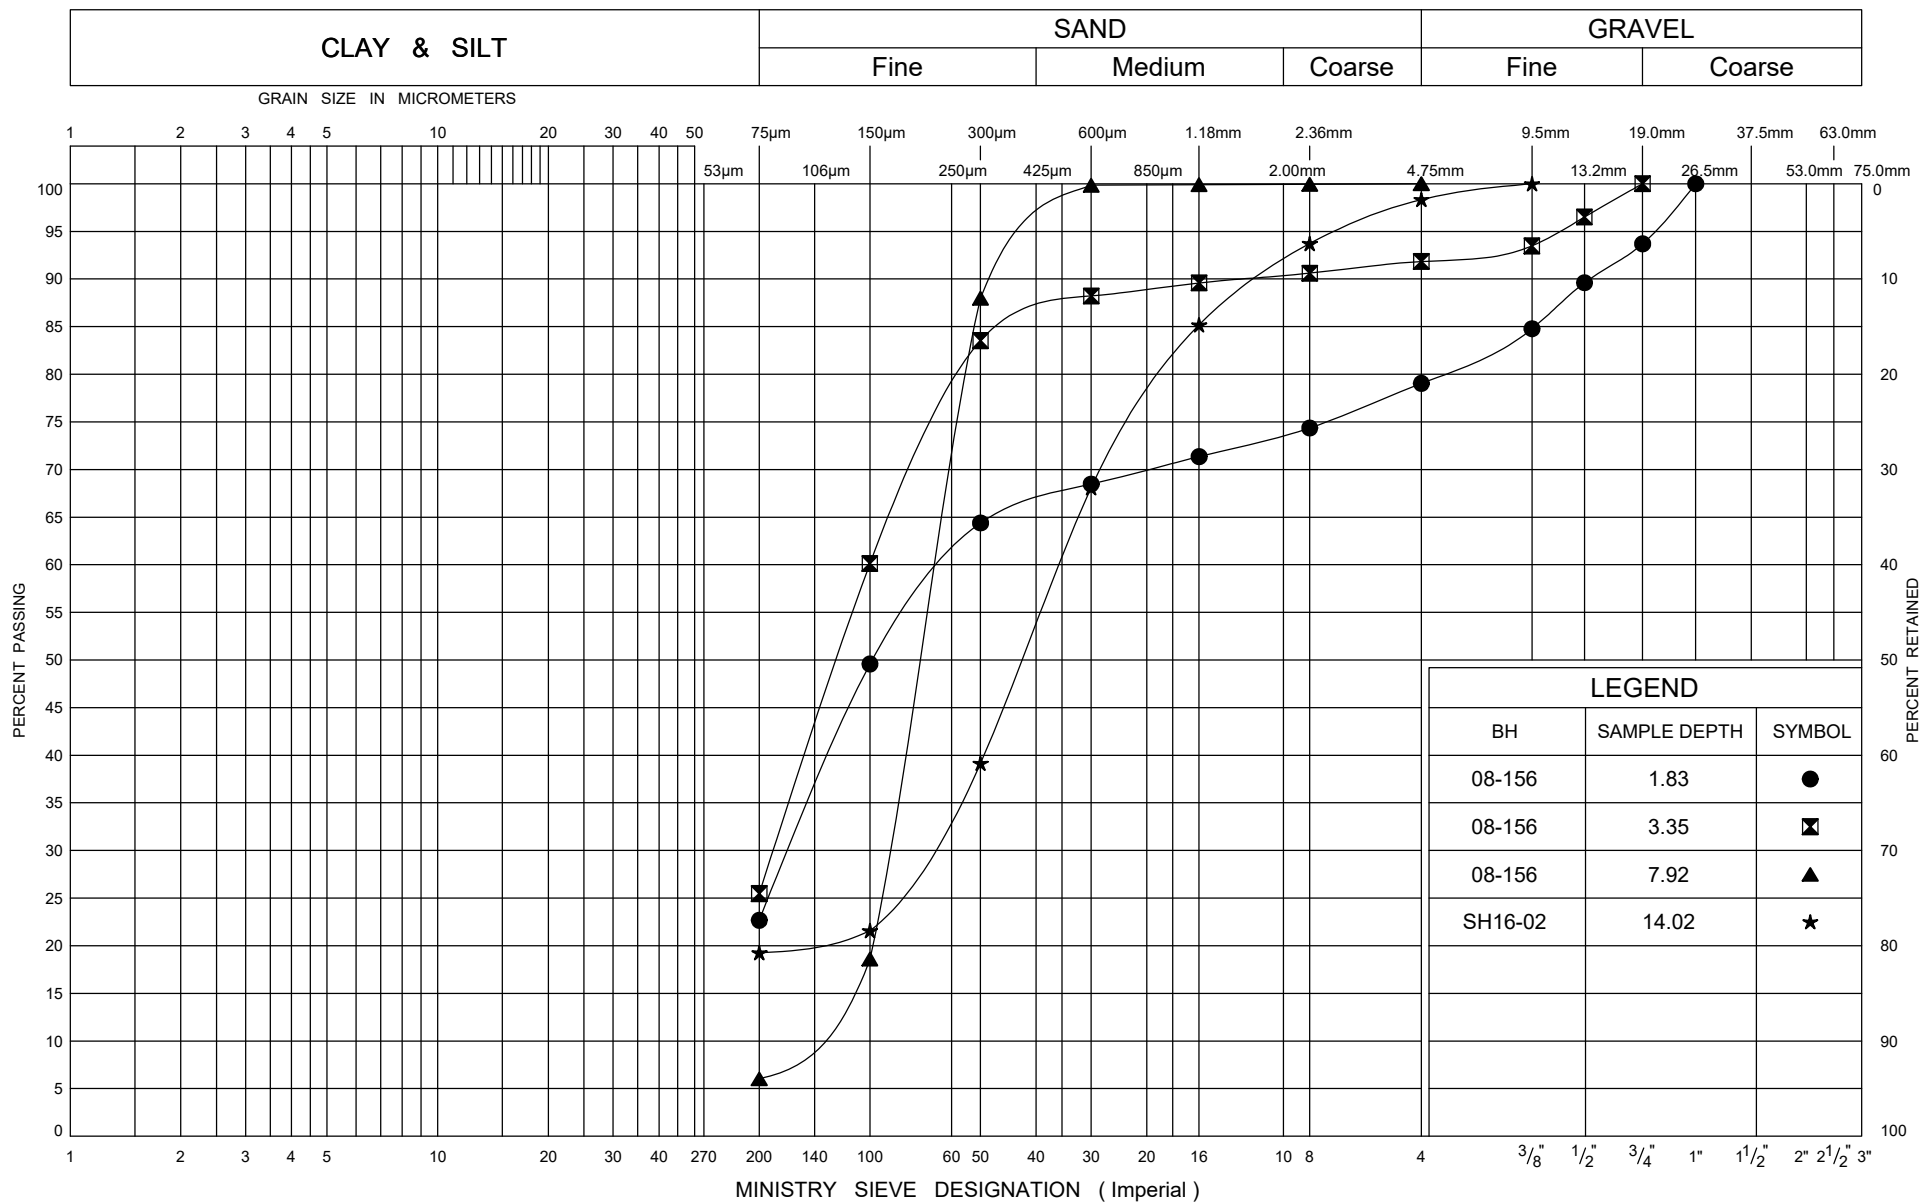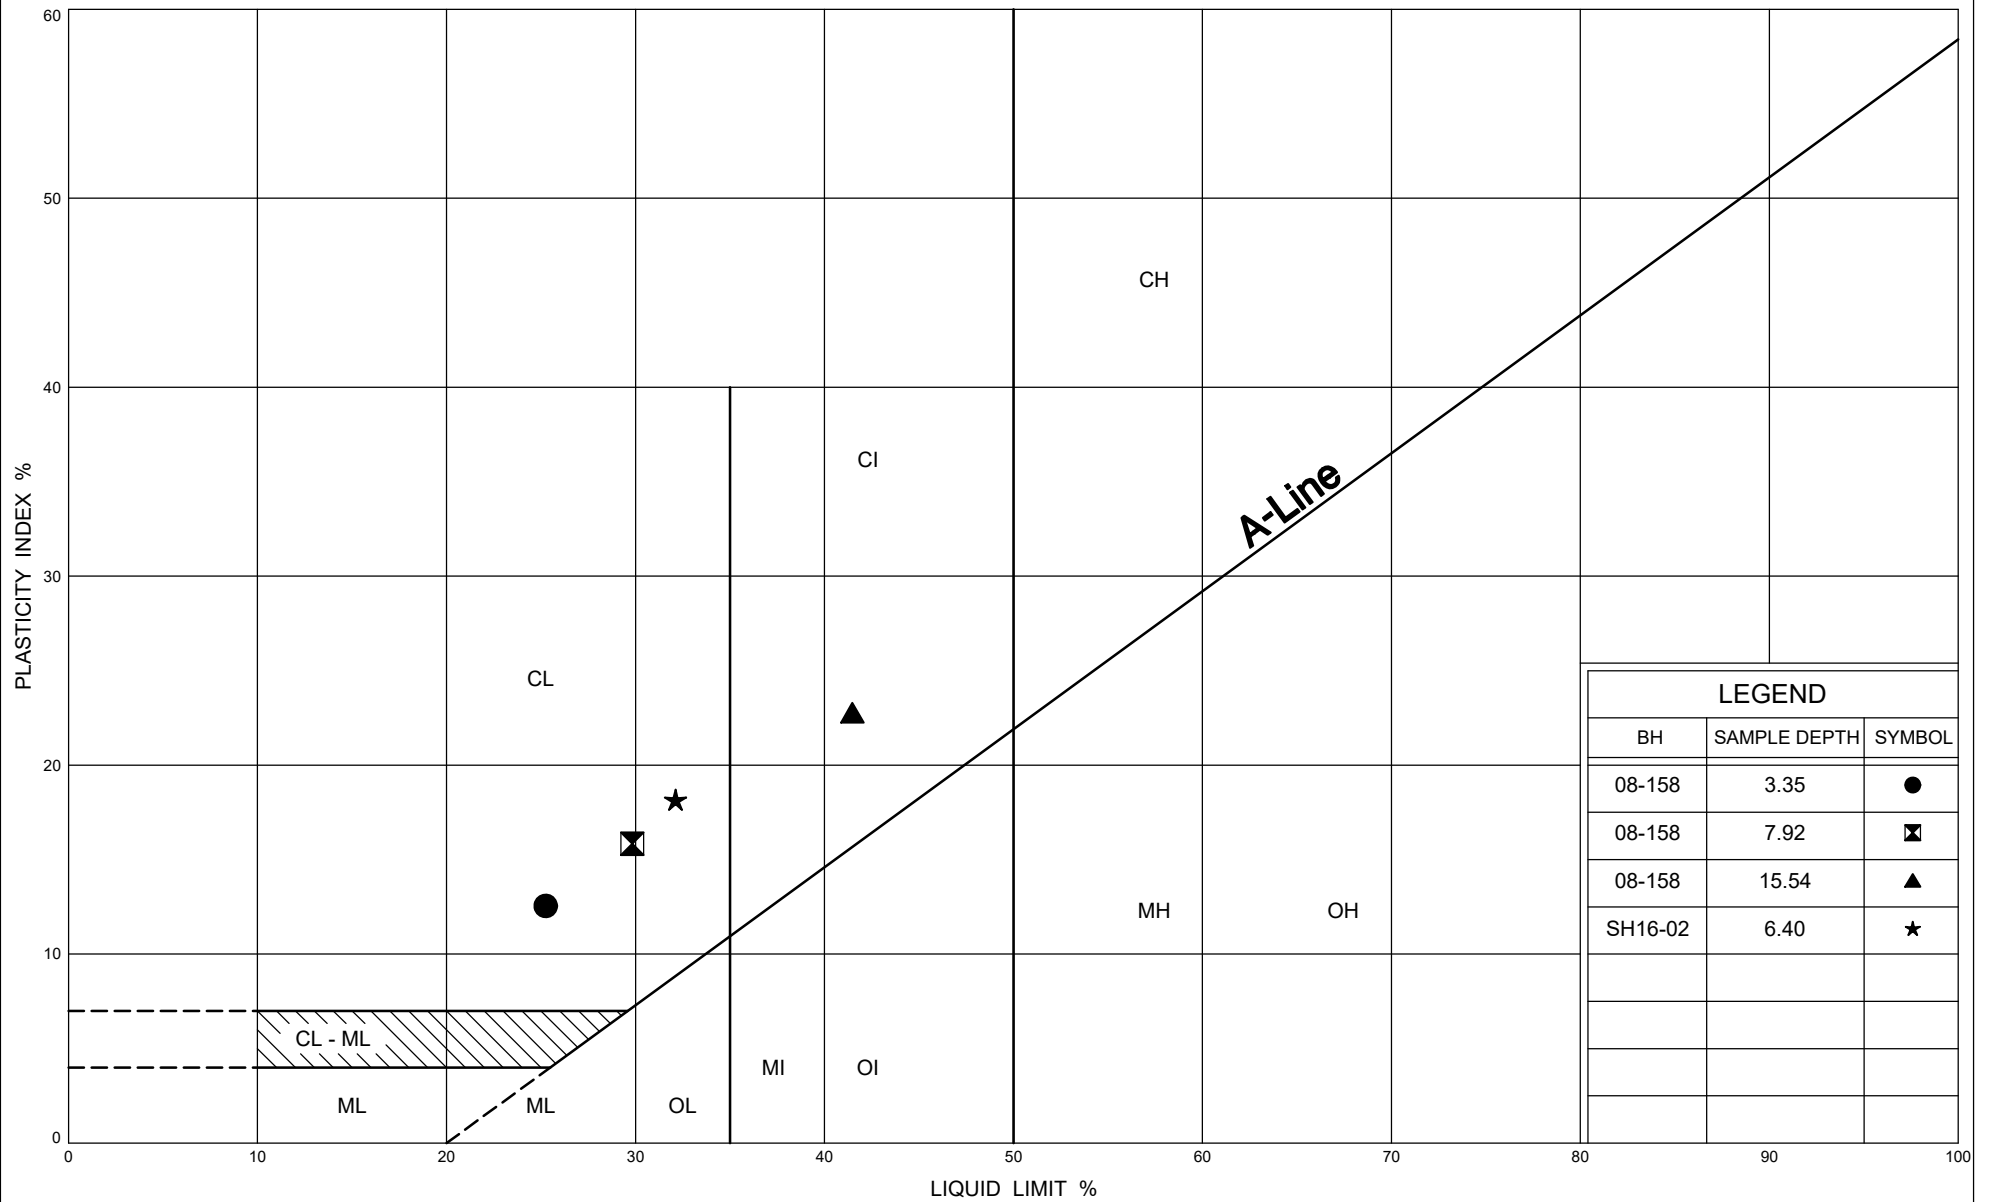+³, ×³: Numbers refer to Sensitivity






Ministry of
Transportation

PLASTICITY CHART

Silty CLAY TILL

FIG No D2

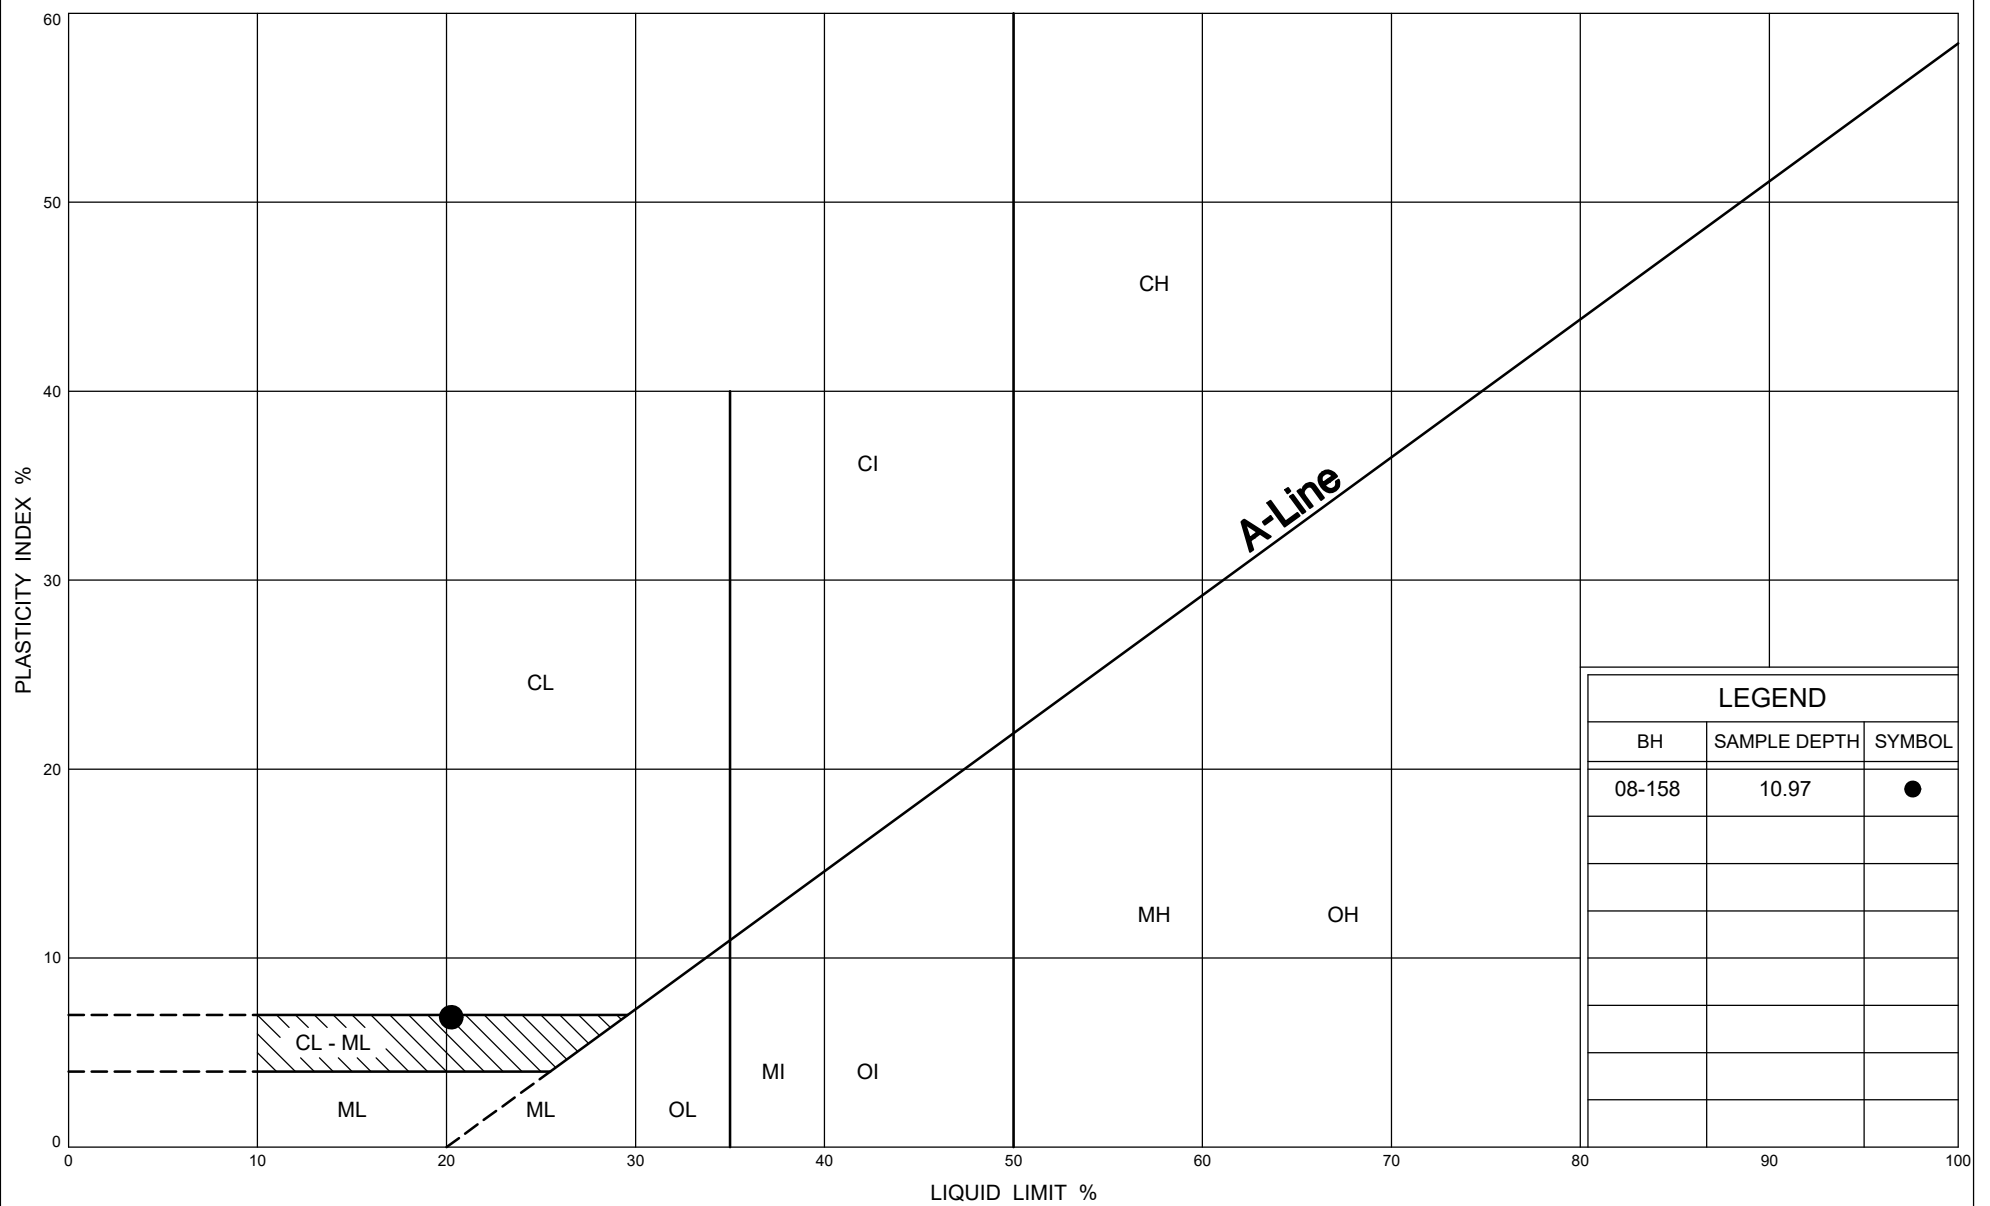GWP 408-88-00




Ministry of
Transportation


PLASTICITY CHART


Clayey SILT TILL

FIG No D3

GWP 408-88-00

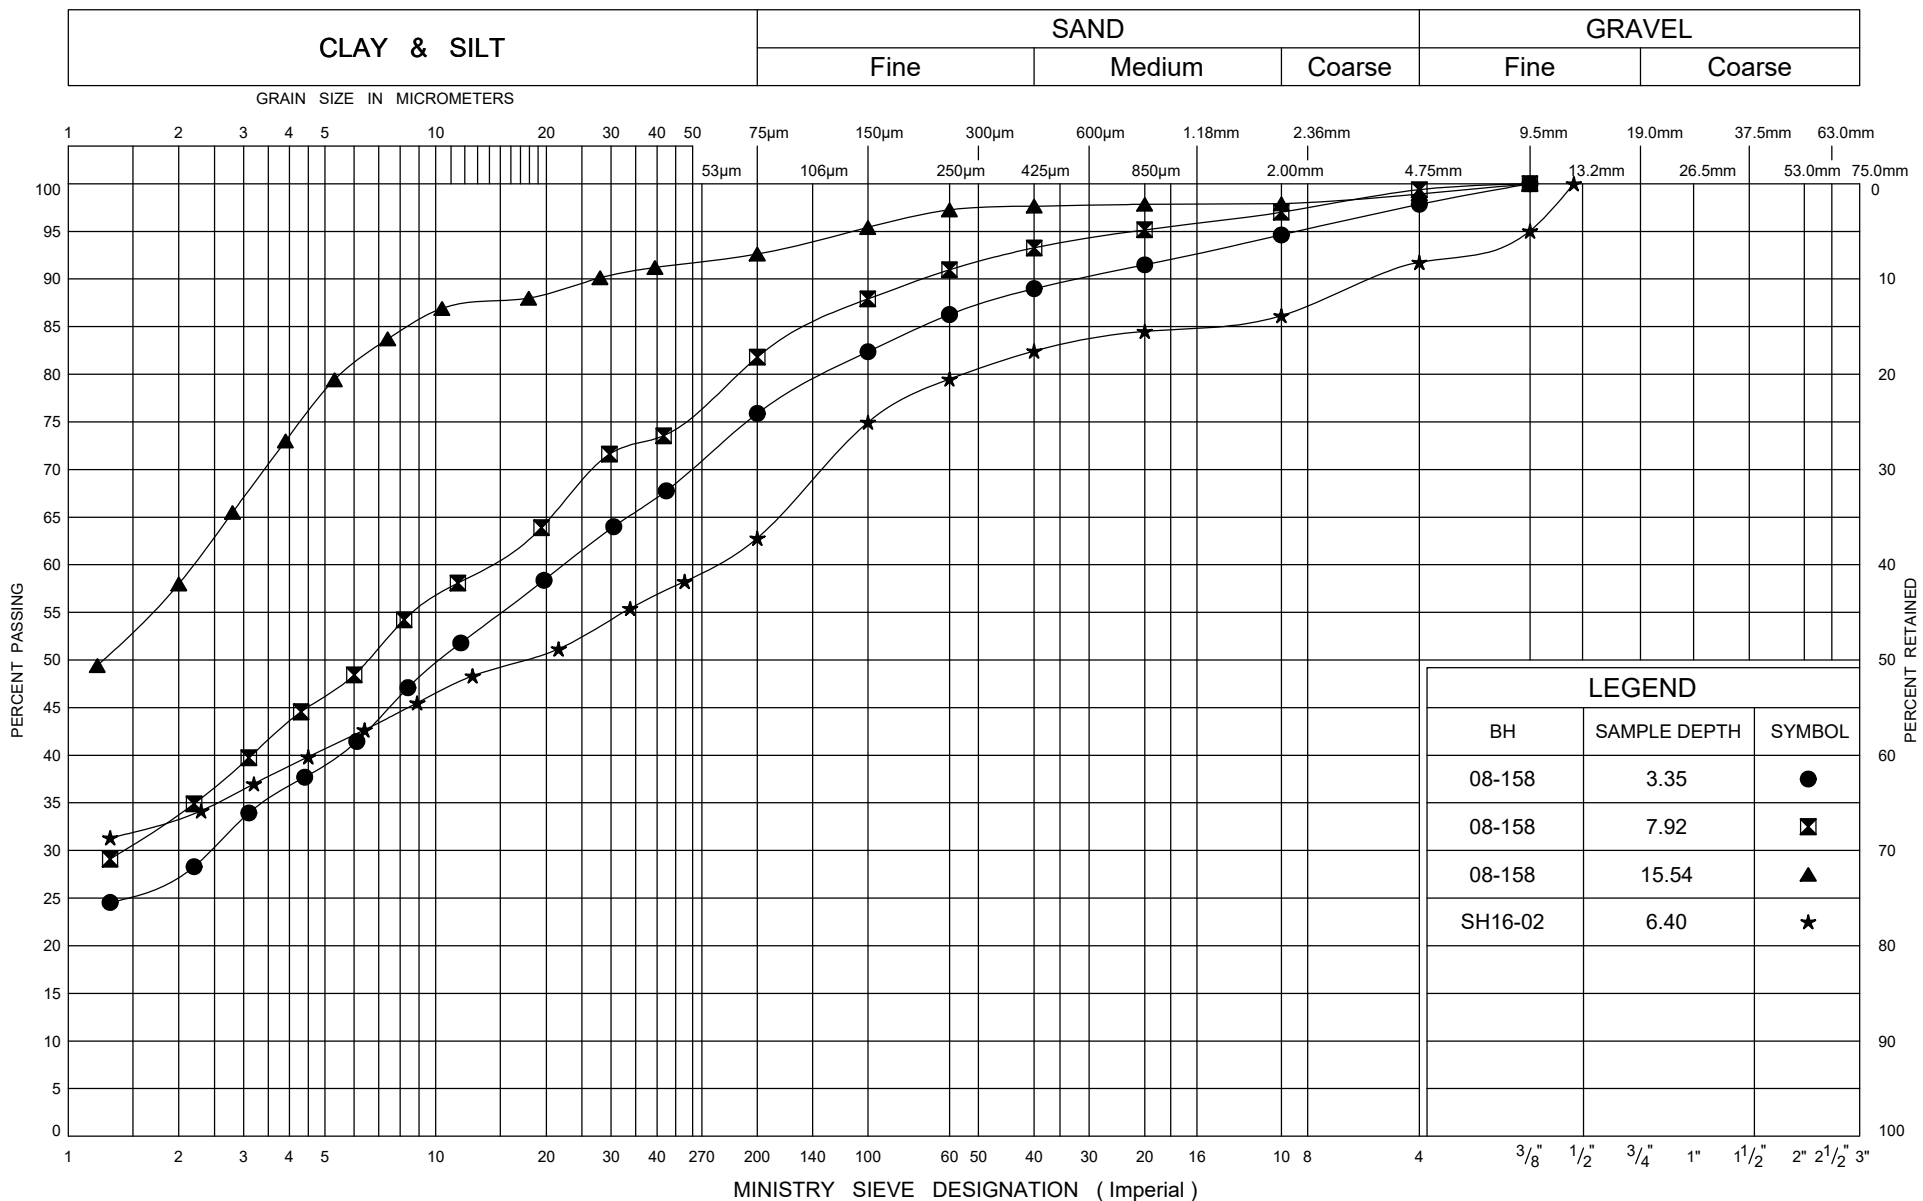

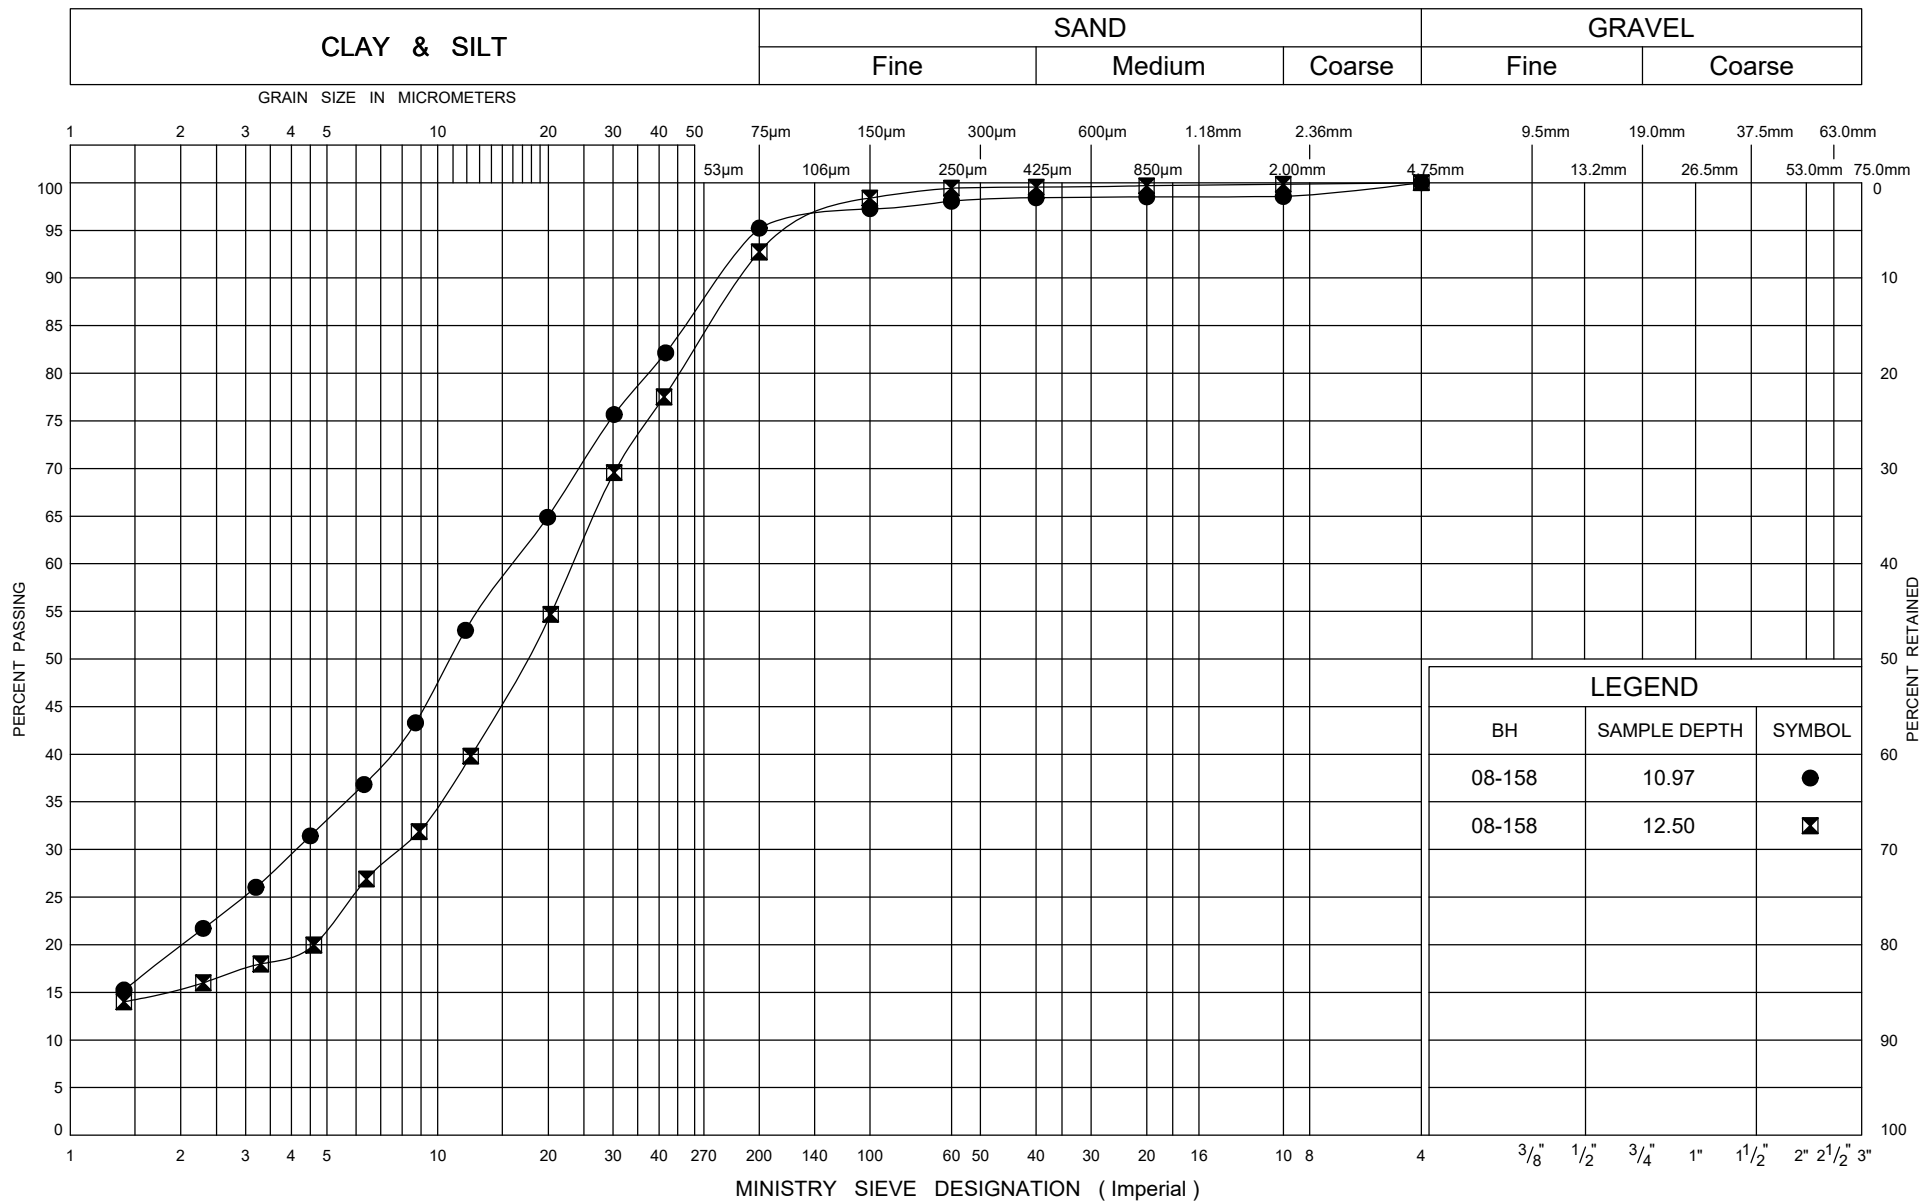

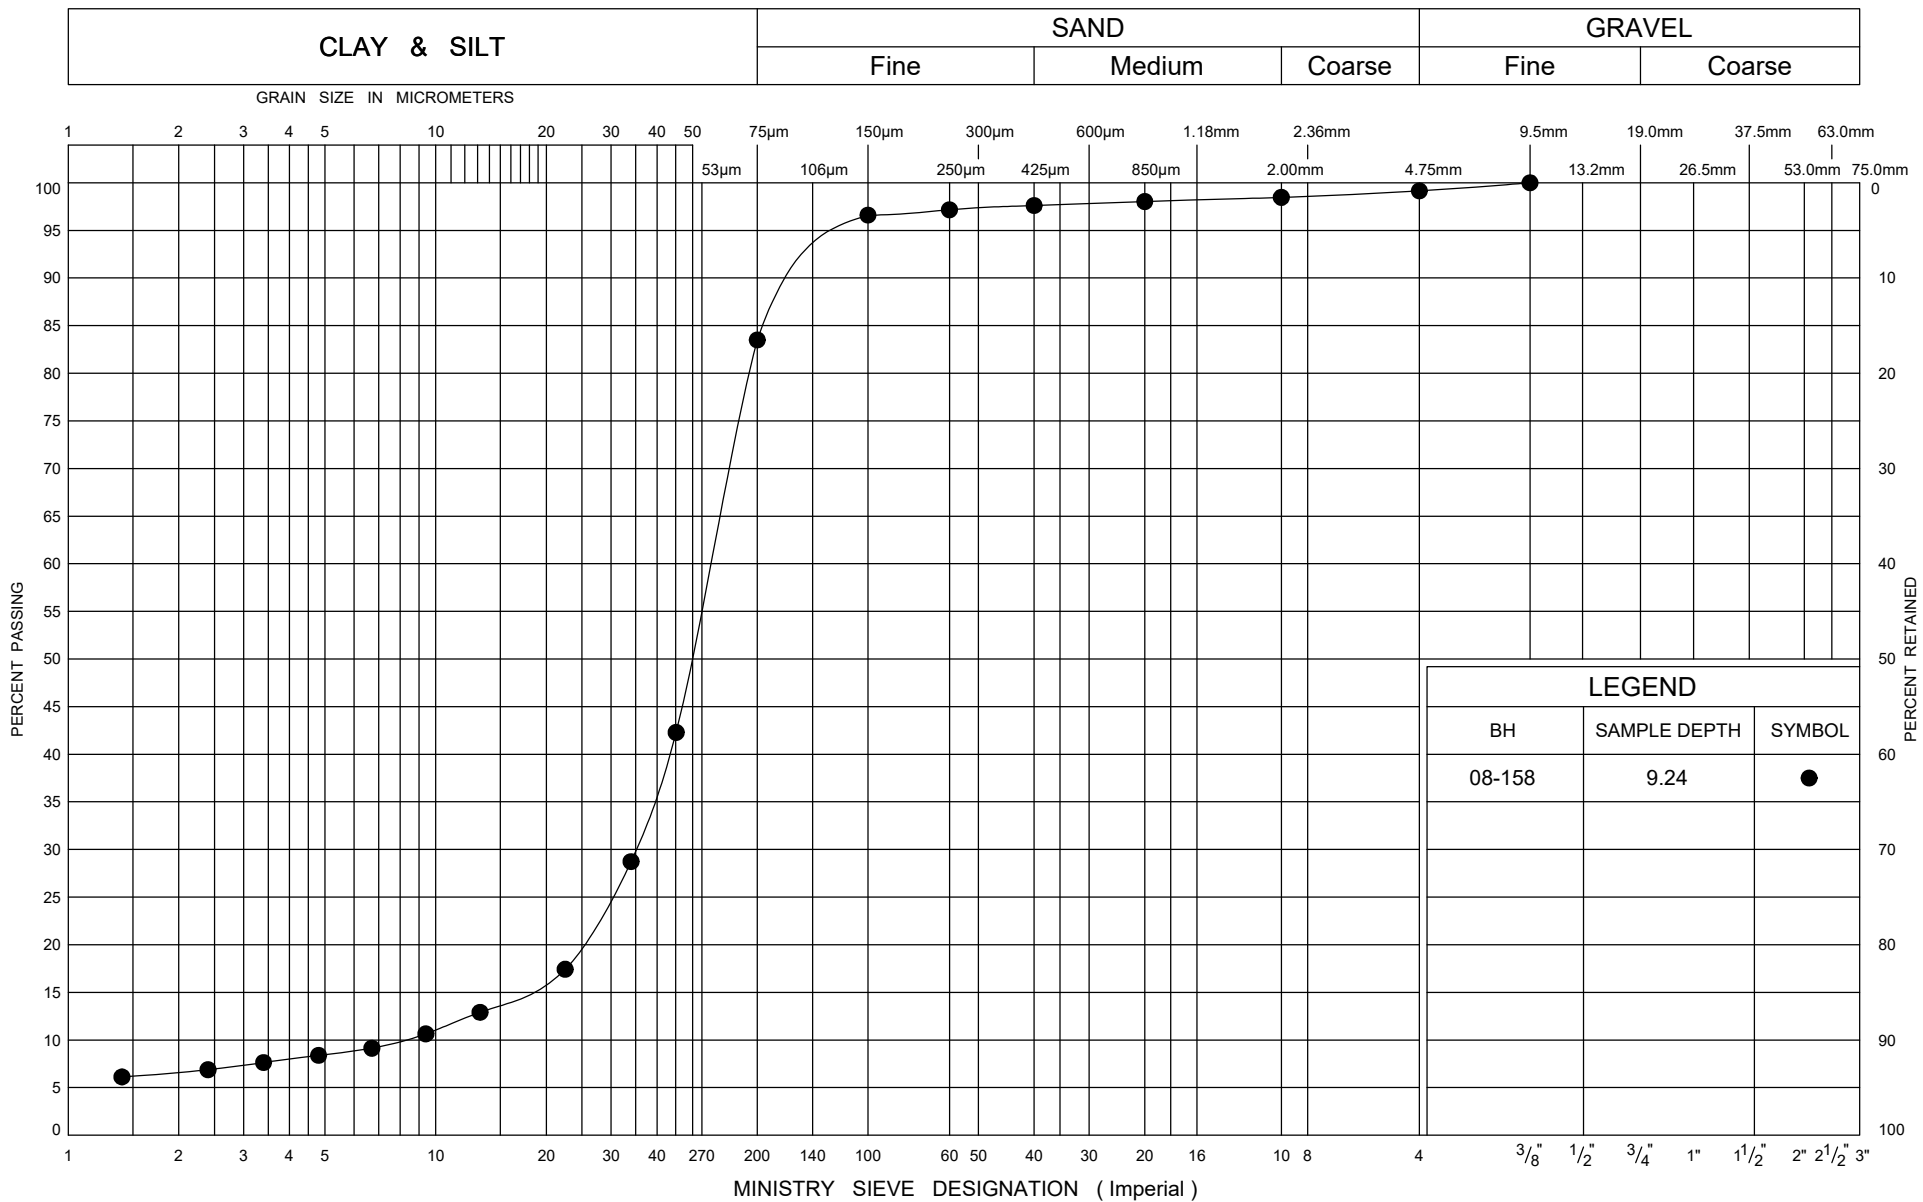



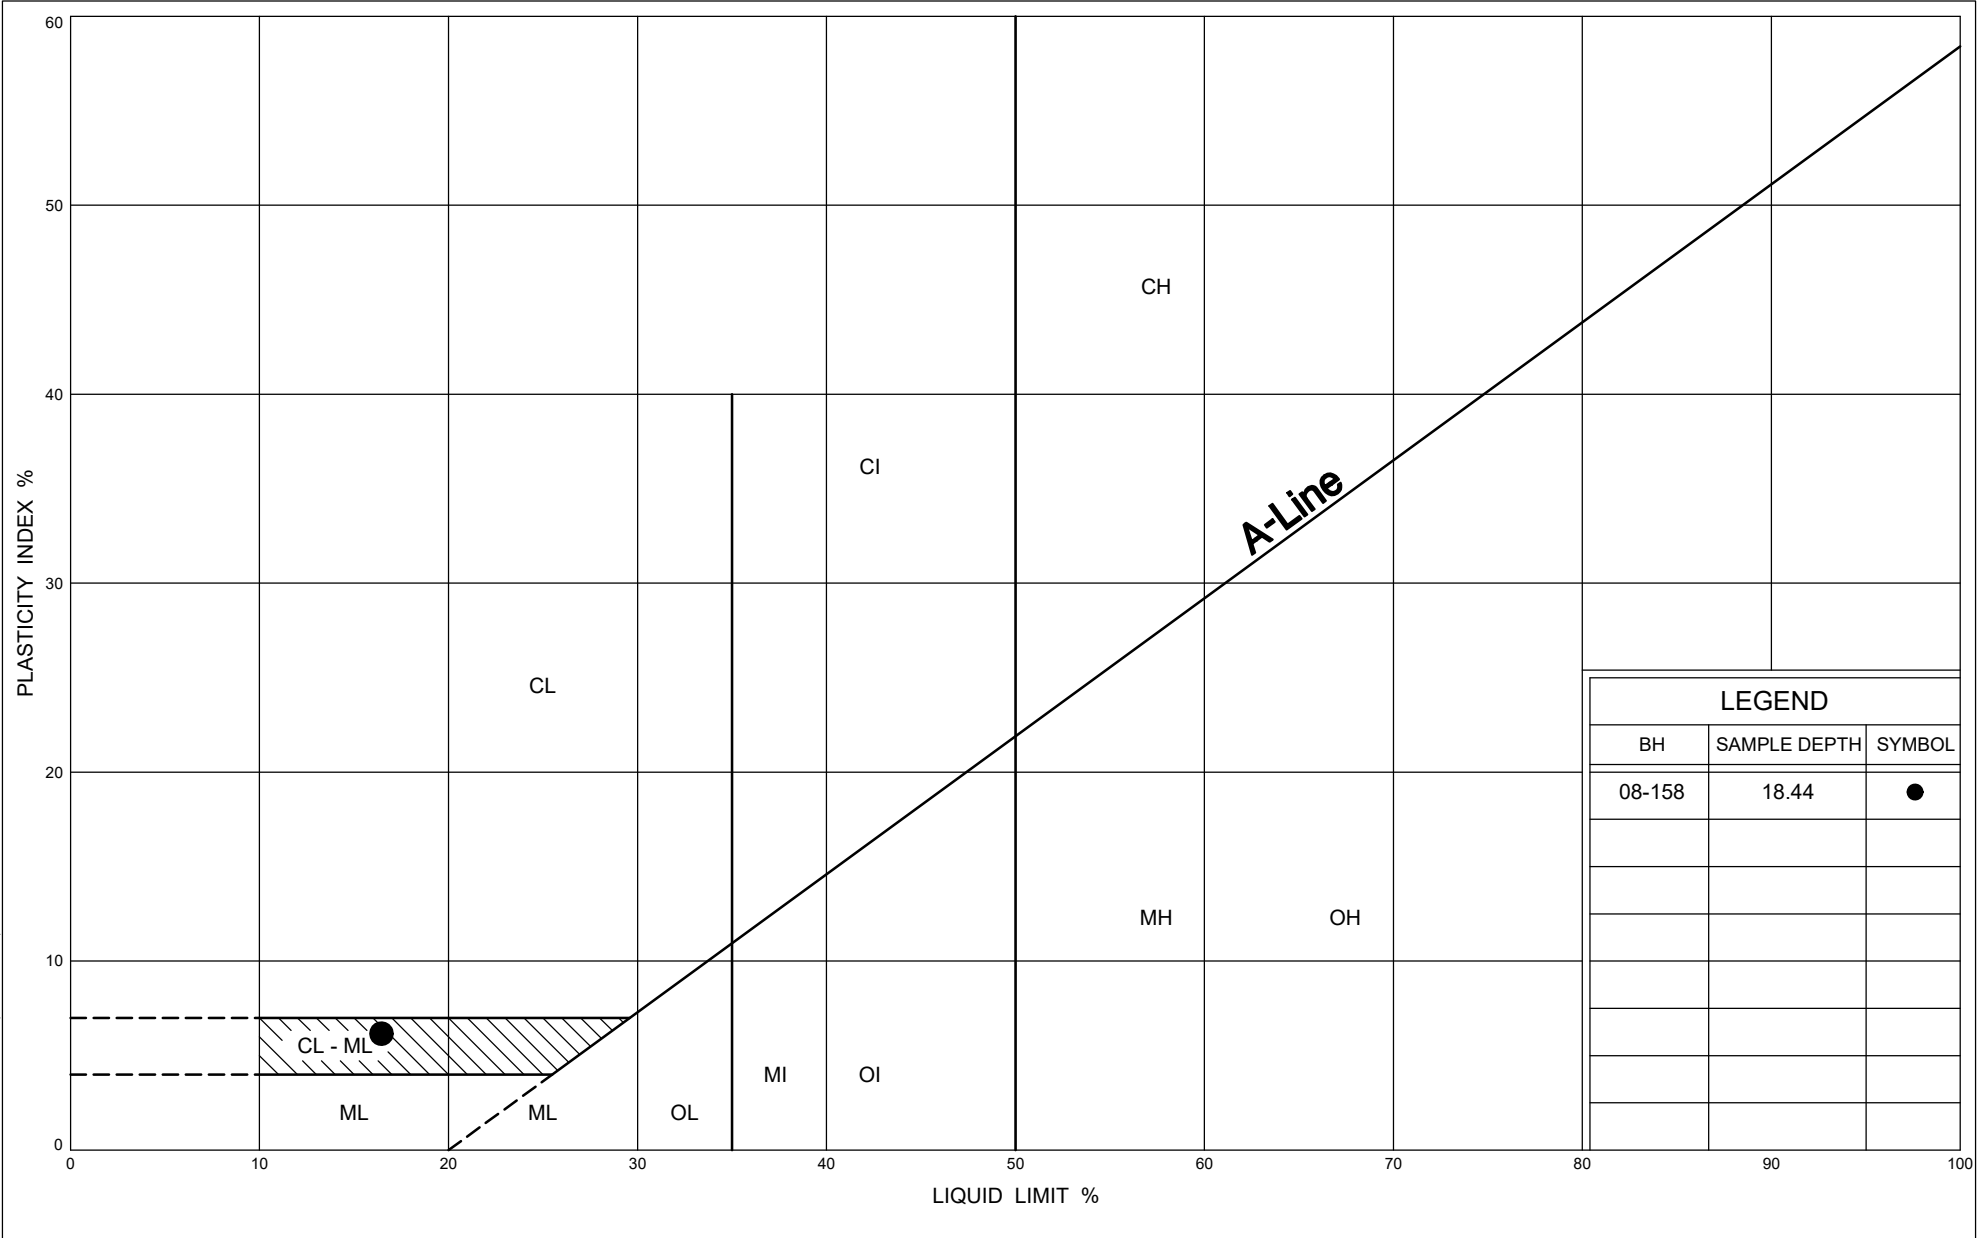




FIG No D8

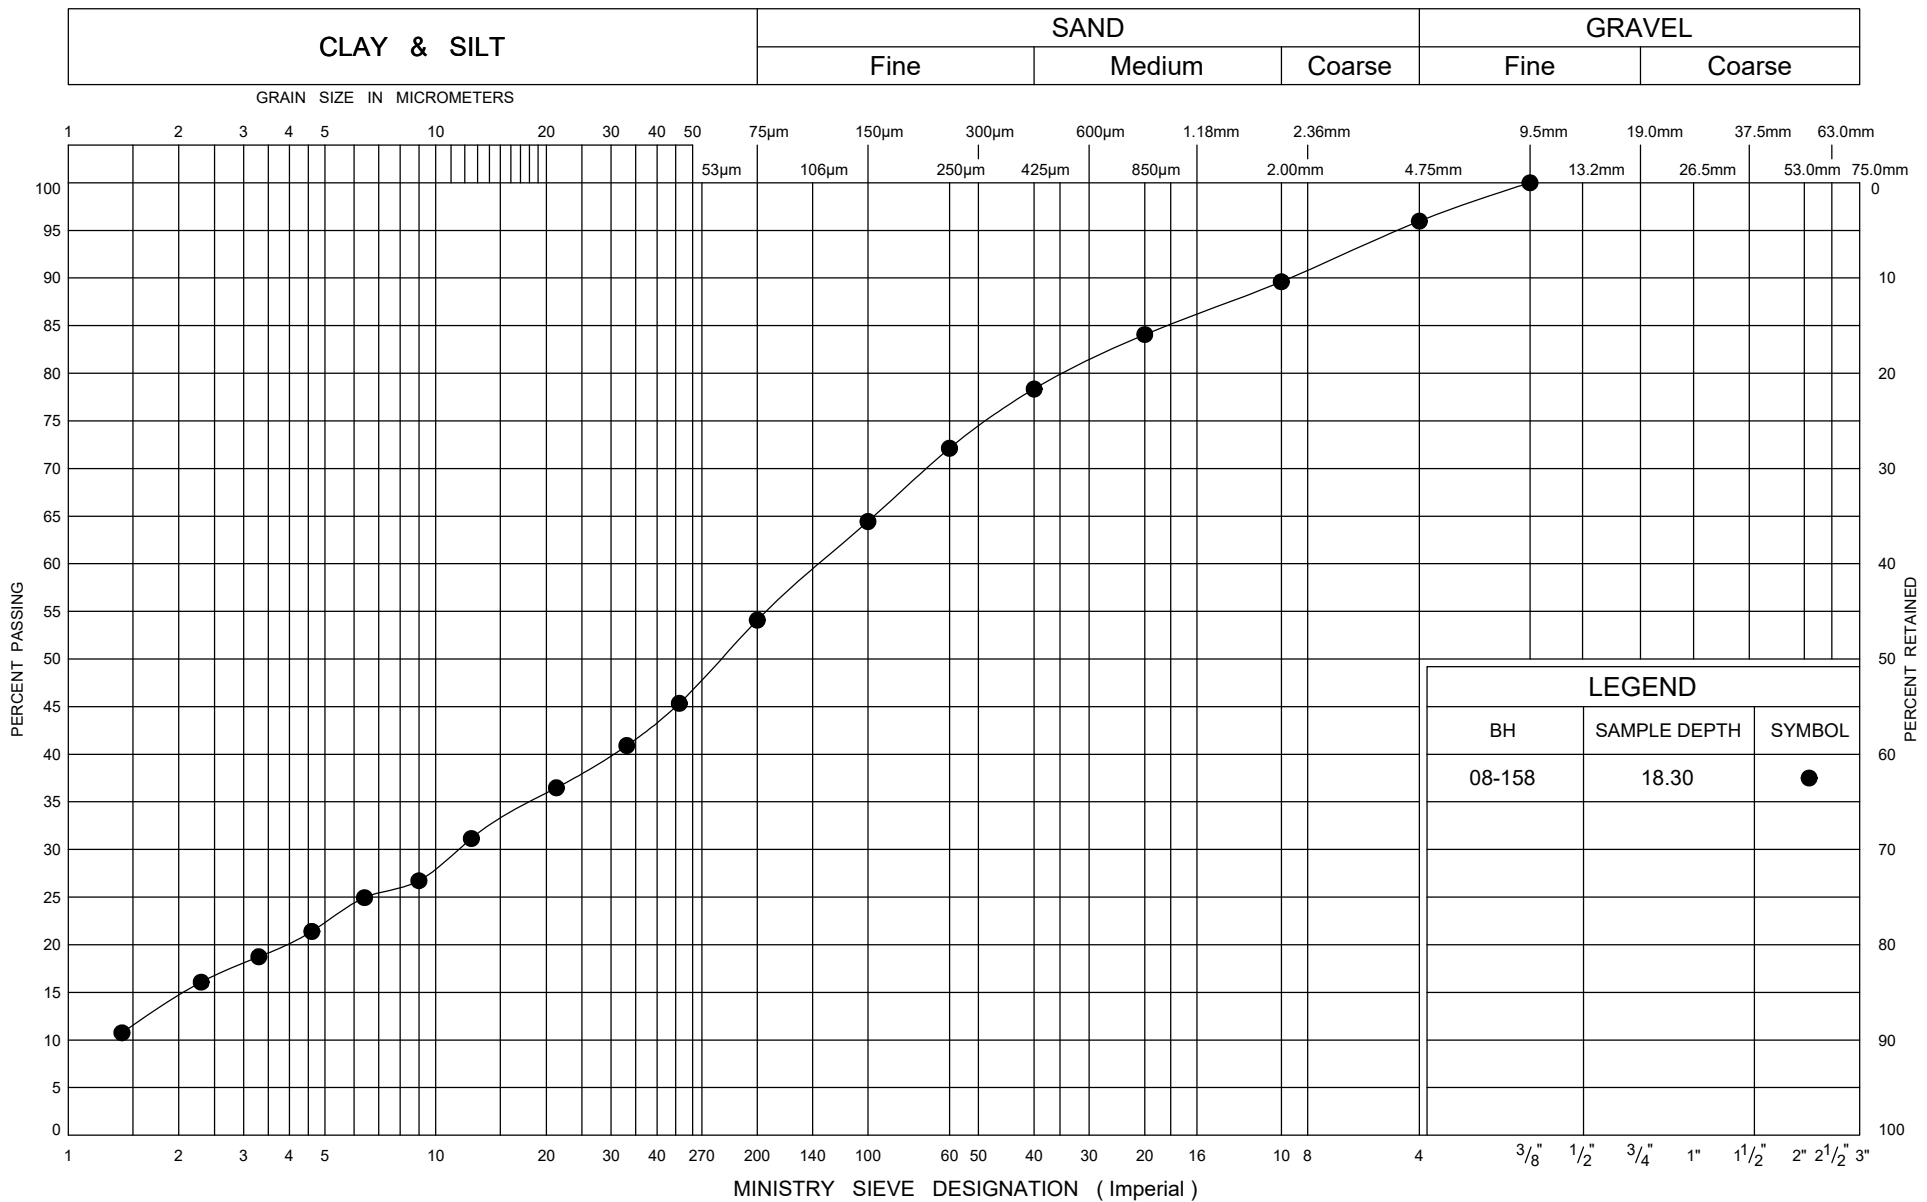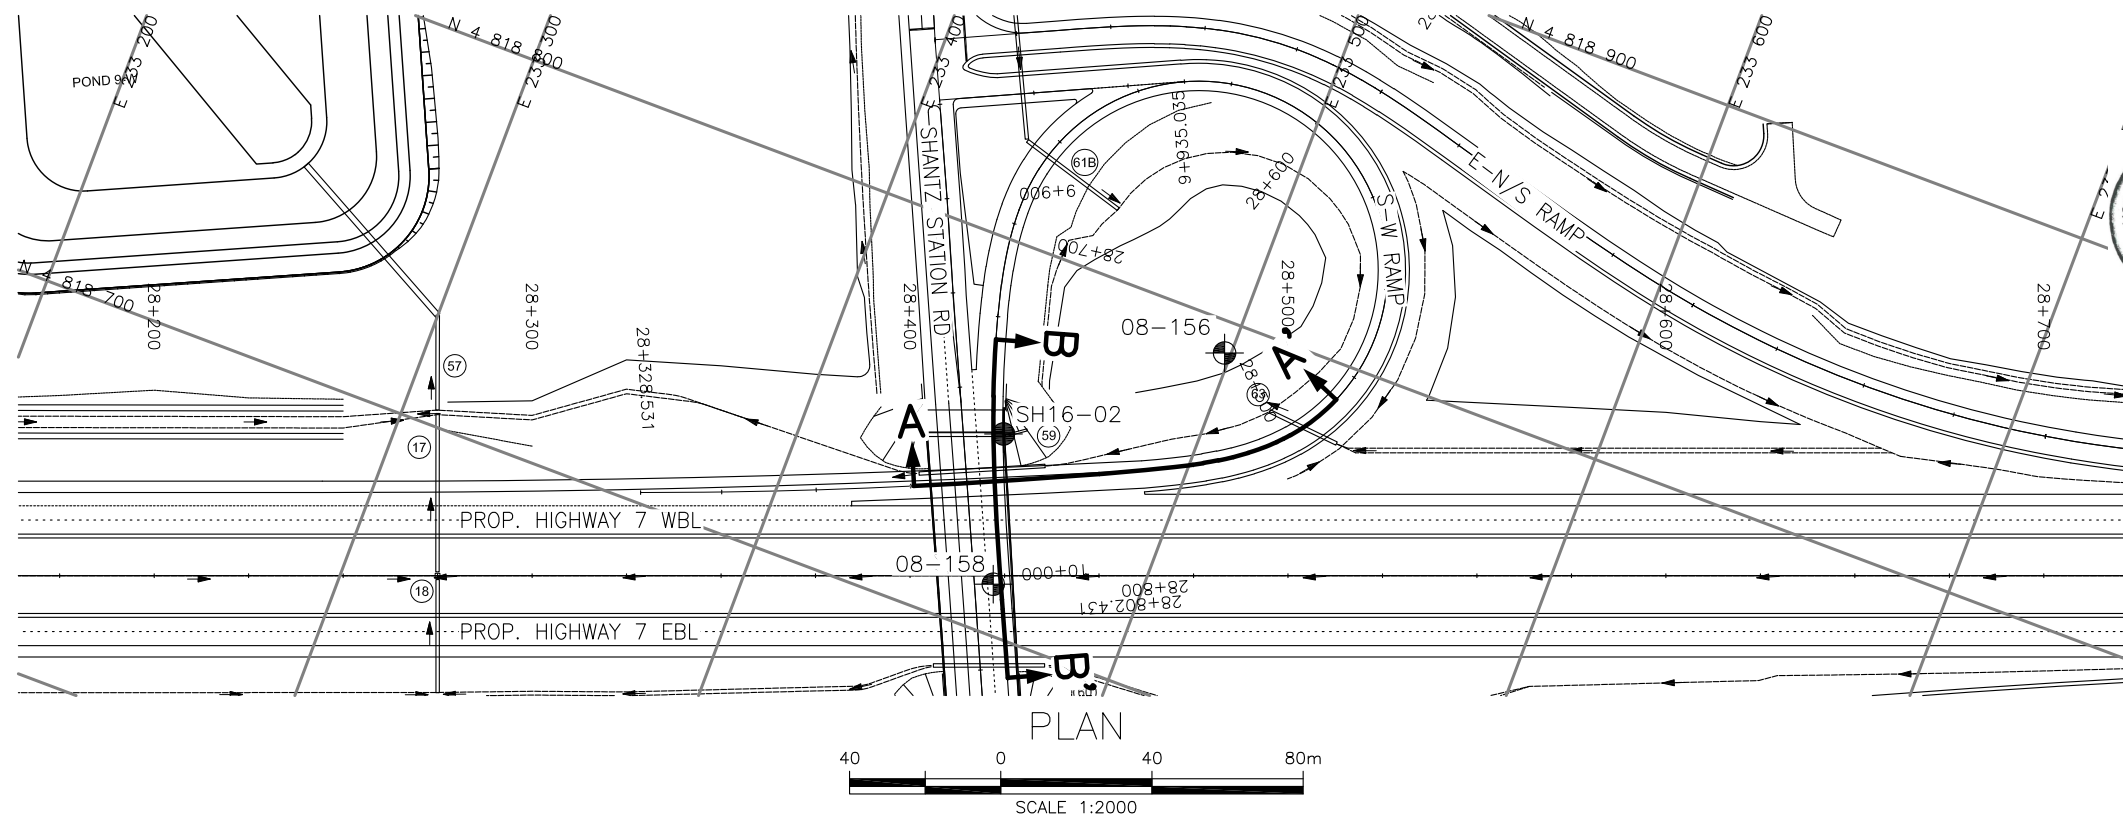GWP 408-88-00






METRIC

DIMENSIONS ARE IN METRES
AND/OR MILLIMETRES
UNLESS OTHERWISE SHOWNCONT No
GWP No 408-88-00REGIONAL ROAD 30
(SHANTZ STATION ROAD)
S-W RAMP CUT/FILL
BOREHOLE LOCATIONS AND SOIL STRATA

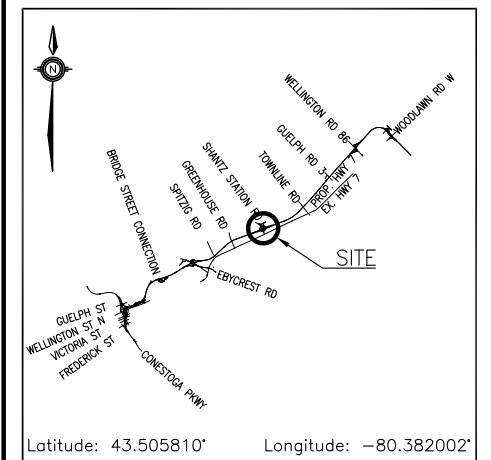THURBER ENGINEERING LTD.



KEYPLAN

LEGEND


	Borehole (Current Investigation)
	Borehole (2008 Investigation)
N	Blows /0.3m (Std Pen Test, 475J/blow)
CONE	Blows /0.3m (60° Cone, 475J/blow)
PH	Pressure, Hydraulic
	Water Level
	Head Artesian Water
	Piezometer
90%	Rock Quality Designation (RQD)
A/R	Auger Refusal

NO	ELEVATION	NORTHING	EASTING
SH16-02	330.7	4 818 751.2	233 451.1
08-156	332.7	4 818 791.8	233 498.4
08-158	330.0	4 818 713.0	233 462.6



-NOTES-

- The boundaries between soil strata have been established only at Borehole locations. Between Boreholes the boundaries are assumed from geological evidence.
- This drawing is for subsurface information only. Surface details and features are for conceptual illustration.
- Coordinate system is MTM NAD 83 Zone 10.

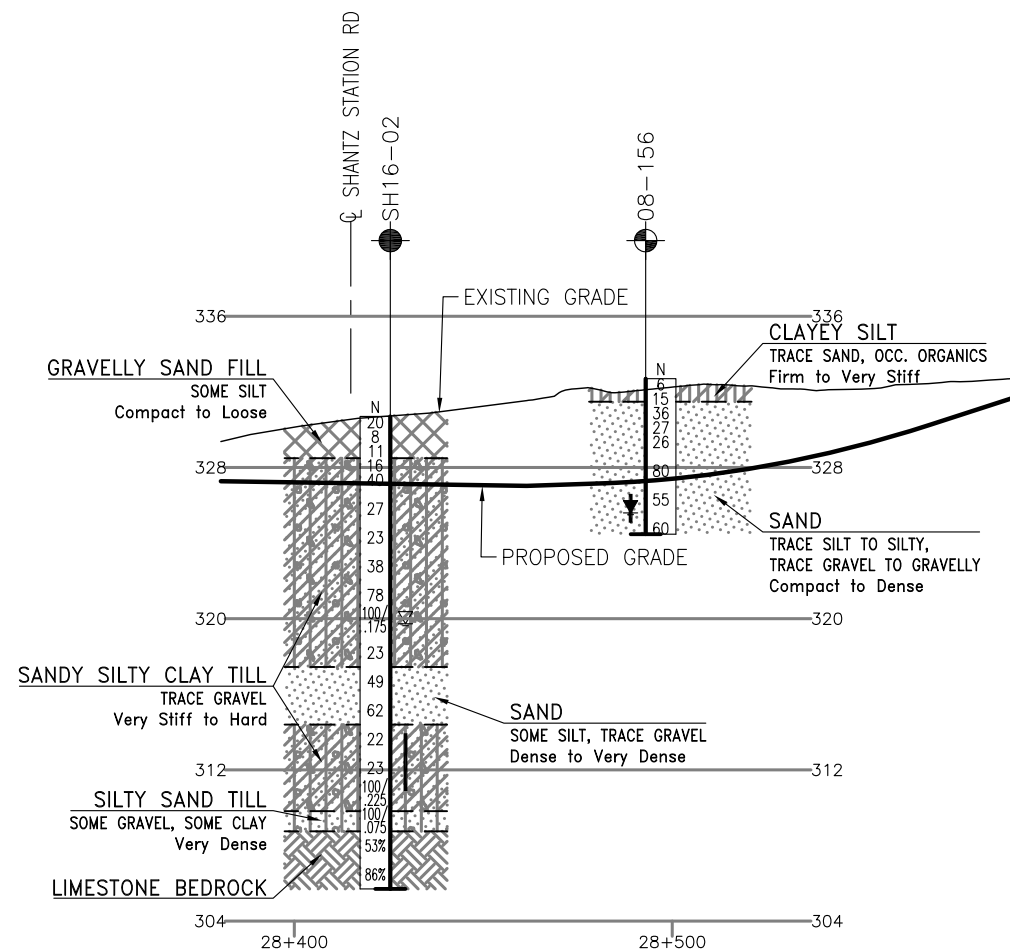
GEOCRES No. 40P09-067



PROFILE A-A' ALONG PROPOSED S-W RAMP

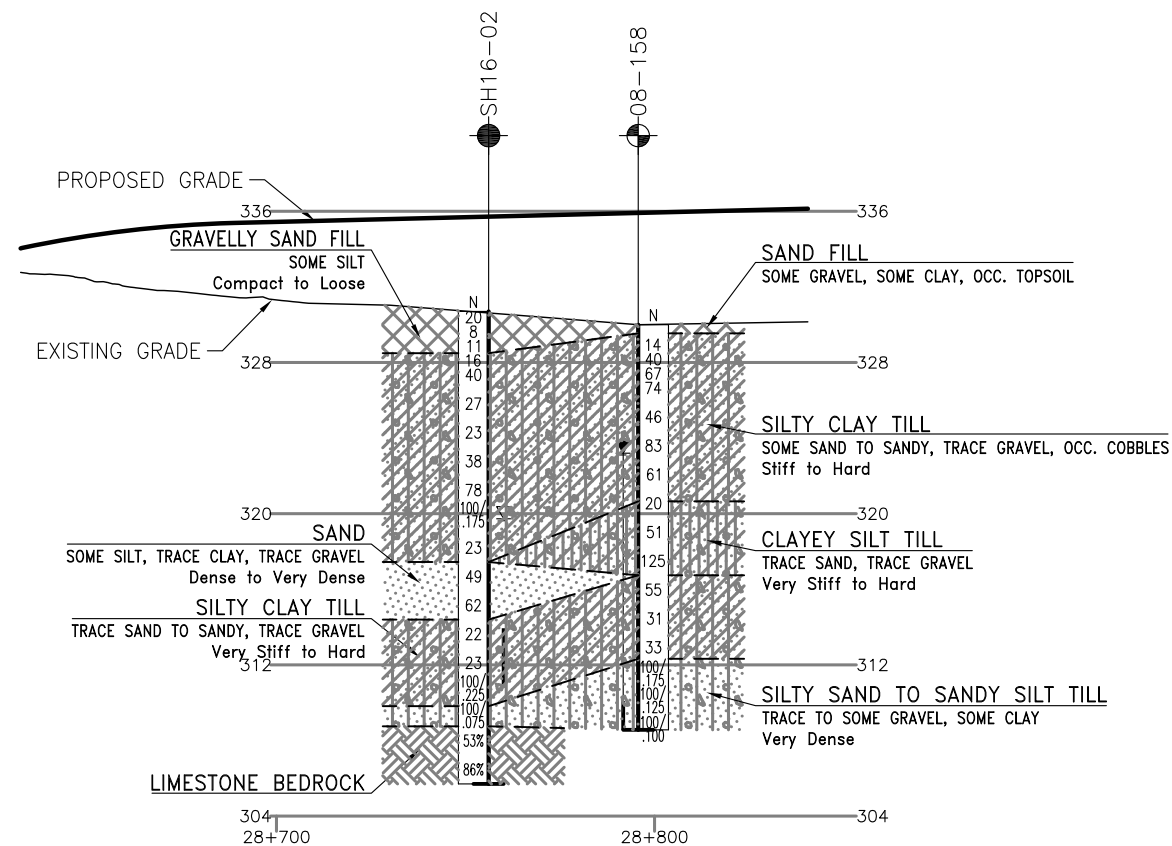

PROFILE B-B' ALONG PROPOSED S-W RAMP



REVISIONS	DATE	BY	DESCRIPTION

DESIGN	MKE	CHK	PKC	CODE	LOAD	DATE	FEB 2024
DRAWN	MFA	CHK	MKE	SITE	STRUCT	DWG	1



Appendix E.

Highway 7: Station 29+950 – 30+150 (08-171, ML16 29+950, ML16 30+000, ML16 30+150)

RECORD OF BOREHOLE No 08-171

1 OF 1

METRIC

GWP# 408-88-00 LOCATION N 4 819 340.3 E 235 014.0 ORIGINATED BY ARA
 DIST HWY 7 - New BOREHOLE TYPE Solid Stem Augers COMPILED BY AN
 DATUM Geodetic DATE 2008.05.20 - 2008.05.20 LATITUDE LONGITUDE CHECKED BY RPR

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa							
								○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL × LAB VANE							
329.8	GROUND SURFACE						20	40	60	80	100	PLASTIC LIMIT w _p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L	
0.0	TOPSOIL: (200mm)														
0.2	Silty SAND , trace clay Loose Brown Moist		1	SS	5										
328.6			2	SS	5										
1.2	Sandy SILT , trace gravel, trace clay Compact to Very Dense Brown Moist (TILL)														
			3	SS	15										
			4	SS	34										
			5	SS	50/ 0.100										
325.2															
4.6	END OF BOREHOLE AT 4.6m.		6	SS	50/ 0.05										

+³, ×³: Numbers refer to Sensitivity 20 15 10 5 0 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No ML16 29+950 1 OF 1 METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 819 271.8 E 234 884.7 ORIGINATED BY BL
 DIST HWY 7 BOREHOLE TYPE Solid Stem Augers COMPILED BY MP
 DATUM Geodetic DATE 2018.06.26 - 2018.06.26 LATITUDE 43.510097 LONGITUDE -80.364697 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT			PLASTIC LIMIT NATURAL MOISTURE CONTENT LIQUID LIMIT			UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)			
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa			WATER CONTENT (%)							
								○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL × LAB VANE										
331.3	GROUND SURFACE							20	40	60	80	100						
0.0	TOPSOIL: (375mm)																	
330.9			1	SS	12		331											
0.4	Sandy SILT , some clay, trace gravel Loose to Very Dense Brown to Grey Moist to Wet (TILL)																	
			2	SS	4		330											
			3	SS	7		329											6 42 37 15
			4	SS	30		328											
			5	SS	99		327											
			6	SS	100/ 0.275		326											
			7	SS	67		325											0 45 41 14
324.6	END OF BOREHOLE AT 6.7m. BOREHOLE CAVED TO 5.5m AND WATER LEVEL AT 3.8m UPON COMPLETION. BOREHOLE BACKFILLED WITH BENTONITE HOLEPLUG AND AUGER CUTTINGS TO SURFACE.																	
6.7																		

ONTMT452 2020LIBRARY(MTO) - COPY.GLB MTO-11375(GINTDATA).GPJ 7/6/23

RECORD OF BOREHOLE No ML16 30+000 1 OF 1 METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 819 291.5 E 234 927.3 ORIGINATED BY BL
DIST HWY 7 BOREHOLE TYPE Solid Stem Augers COMPILED BY MP
DATUM Geodetic DATE 2018.06.28 - 2018.06.28 LATITUDE 43.510278 LONGITUDE -80.364172 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa						
								20 40 60 80 100						
								20 40 60 80 100						
330.3	GROUND SURFACE													
0.0	TOPSOIL: (250mm)													
330.1														
0.3	Sandy SILT , some clay, trace gravel Compact to Very Dense Brown Moist to Wet (TILL)		1	SS	15		330							
			2	SS	20		329							1 40 43 16
			3	SS	14		328							
			4	SS	35		327							
			5	SS	54		326							
							325							
			6	SS	86		324							
							323							
			7	SS	83									


ONTMT452 2020LIBRARY(MTO) - COPY.GLB MTO-11375(GINTDATA).GPJ 7/6/23


RECORD OF BOREHOLE No ML16 30+150 1 OF 1 METRIC



GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 819 351.9 E 235 071.0 ORIGINATED BY BL
DIST HWY 7 BOREHOLE TYPE Solid Stem Augers COMPILED BY MP
DATUM Geodetic DATE 2018.01.28 - 2018.01.28 LATITUDE 43.510835 LONGITUDE -80.362404 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT NATURAL MOISTURE CONTENT LIQUID LIMIT			UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)							
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa ○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL × LAB VANE					WATER CONTENT (%) w _p w w _L				GR	SA	SI	CL				
331.6	GROUND SURFACE							20	40	60	80	100												
0.0	TOPSOIL: (125mm)							20	40	60	80	100												
0.1	Silty SAND , trace clay, trace gravel Compact Brown Moist		1	SS	25		331							○					7	50	34	9		
			2	SS	15									○										
329.8							330							○										
1.8	Sandy SILT , some clay, trace gravel, occasional cobbles Compact to Very Dense Brown Moist (TILL)		3	SS	24									○										
													○											
			4	SS	99		329							○										
														○										
			5	SS	100/ 0.250									○										
			6	SS	100/ 0.100		327								○									
							326																	

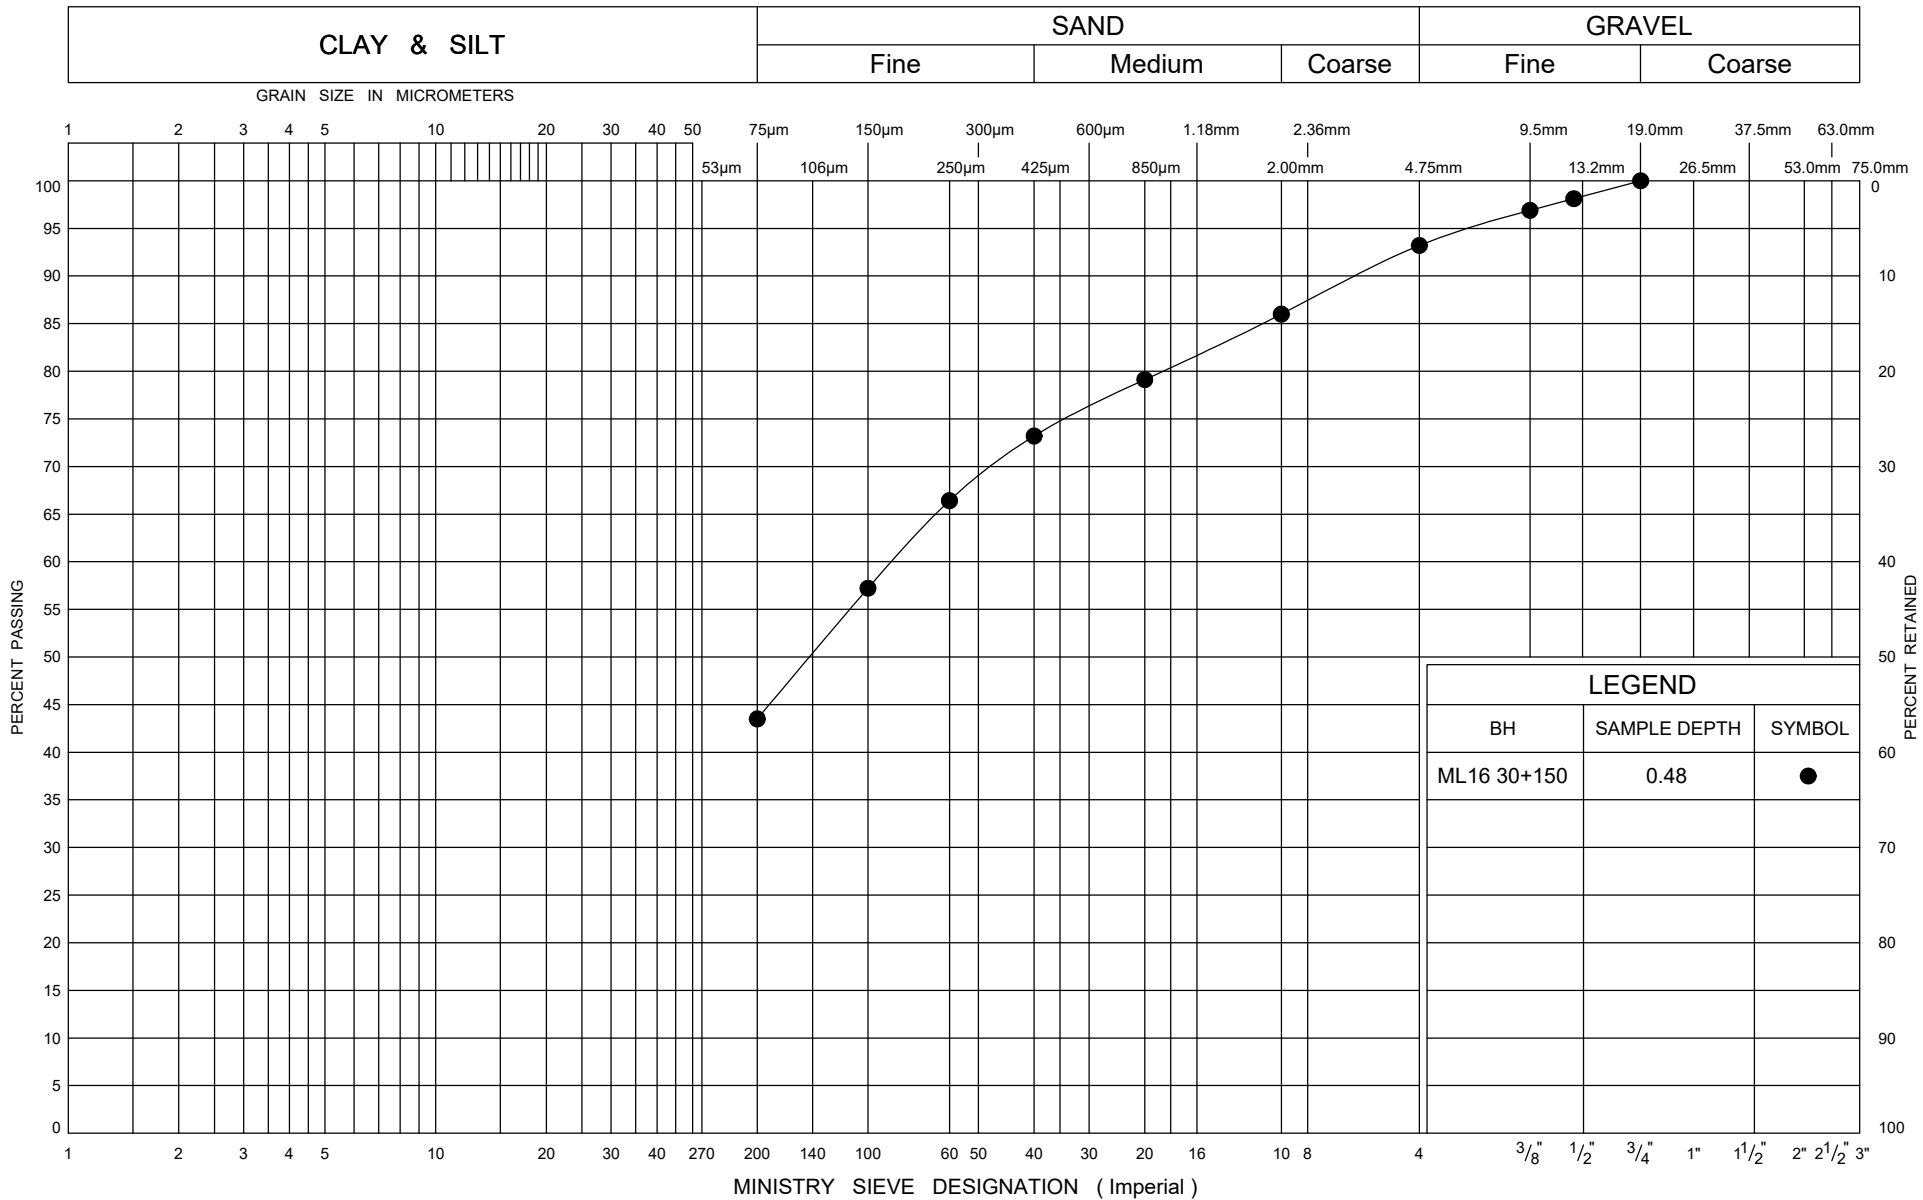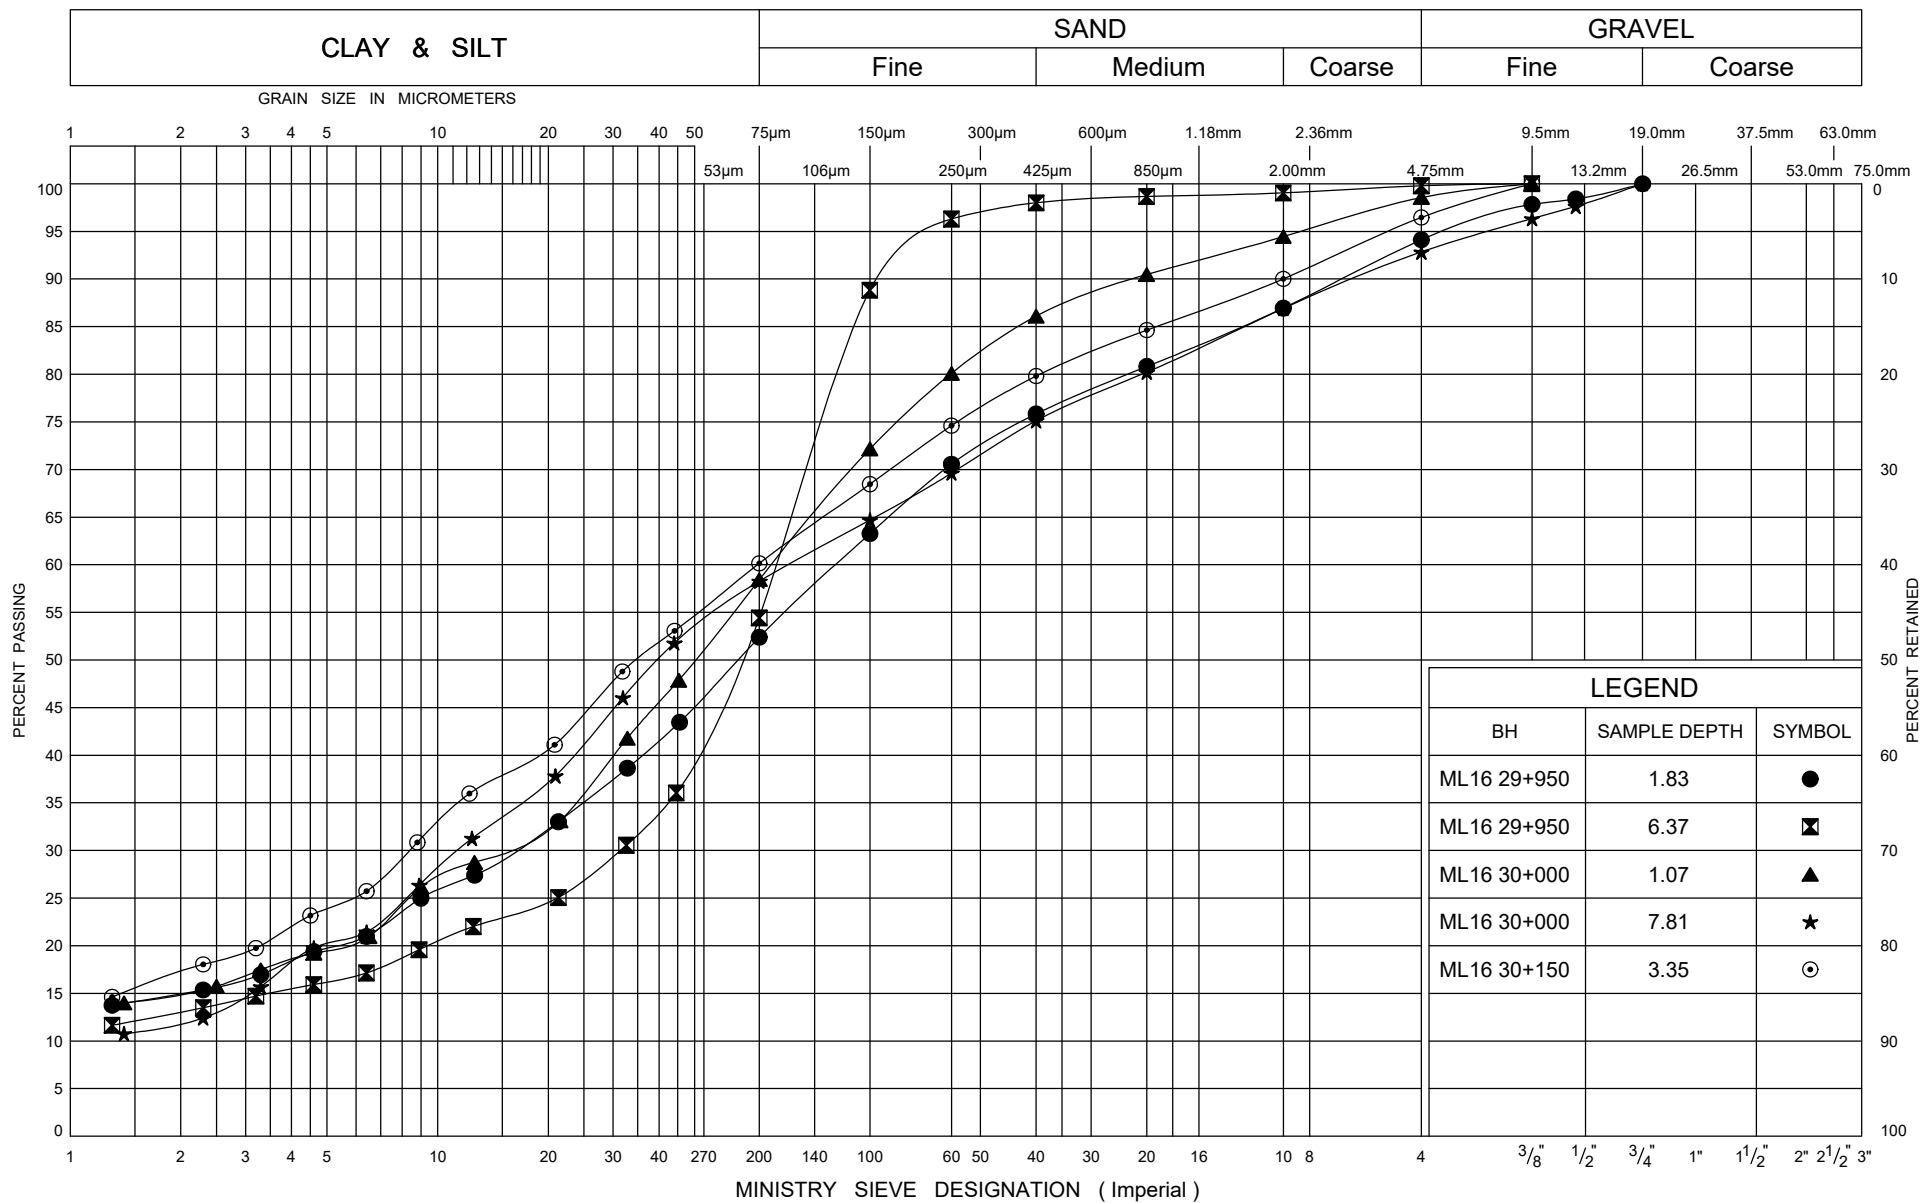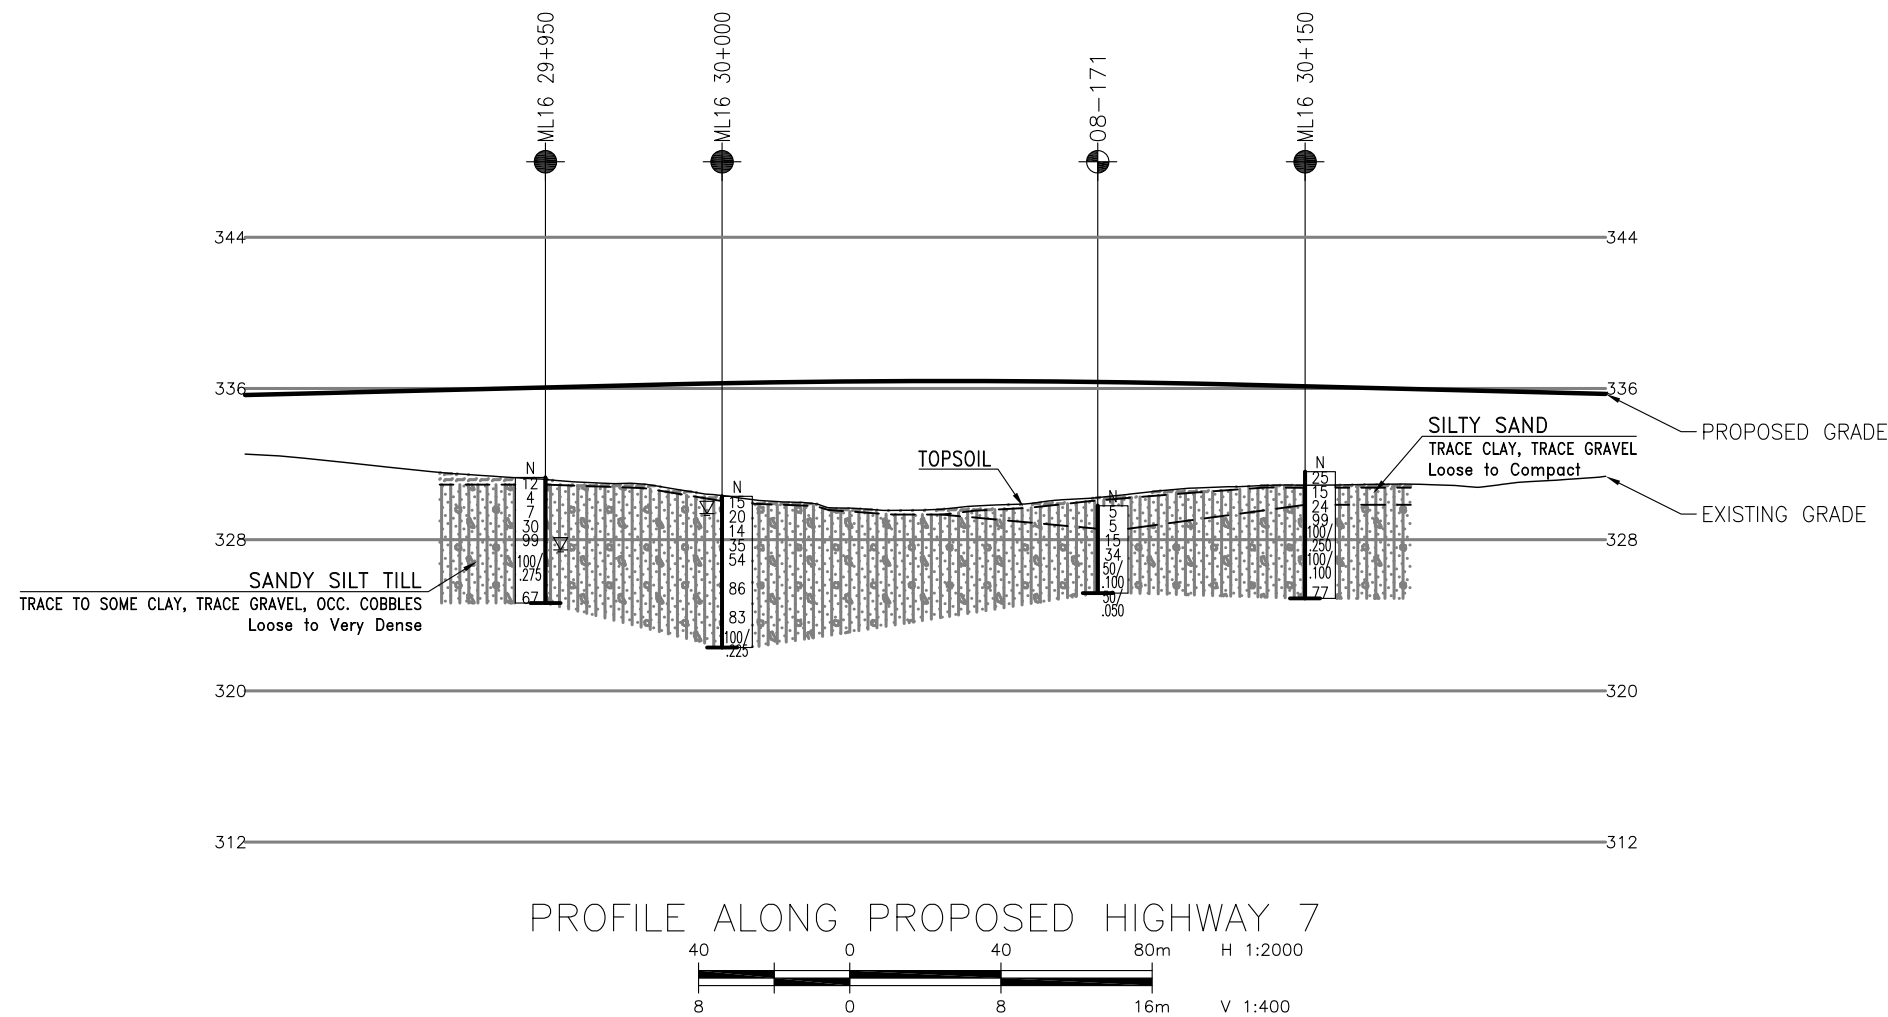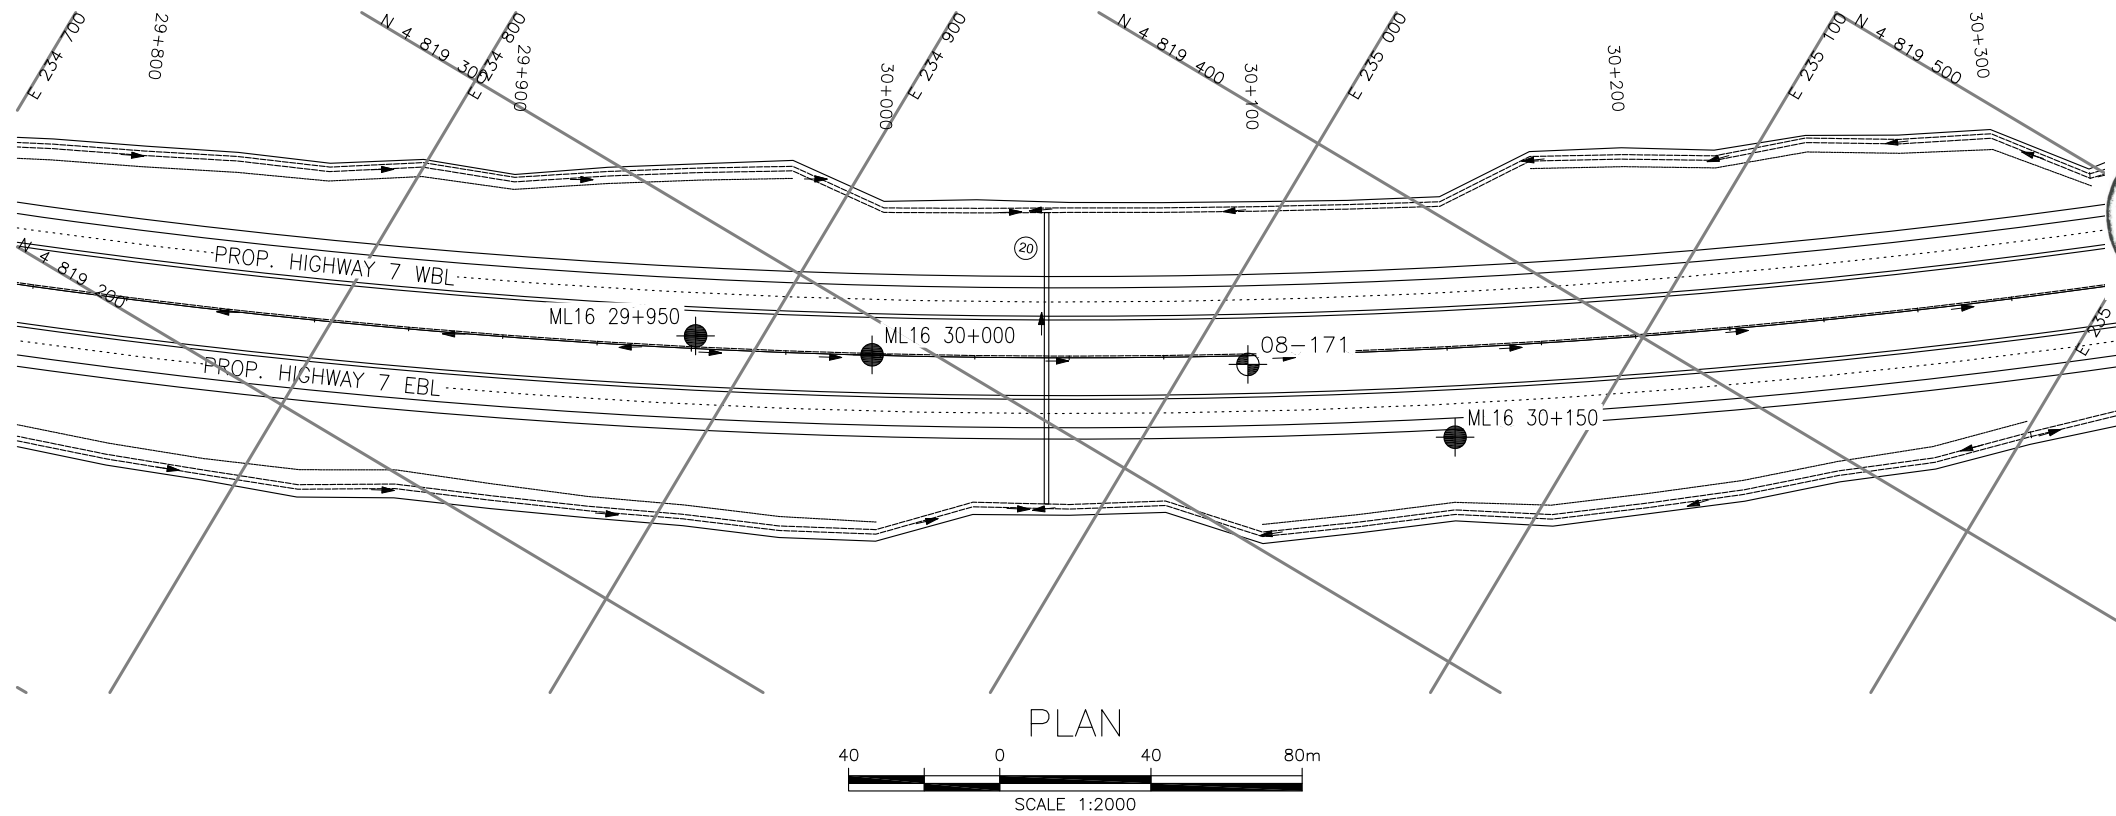+³, ×³: Numbers refer to Sensitivity 20 15 10 5 (%) STRAIN AT FAILURE







METRIC
DIMENSIONS ARE IN METRES
AND/OR MILLIMETRES
UNLESS OTHERWISE SHOWN




CONT No
GWP No 408-88-00

HIGHWAY 7
MAINLINE FILL
29+950 TO 30+150
BOREHOLE LOCATIONS AND SOIL STRATA



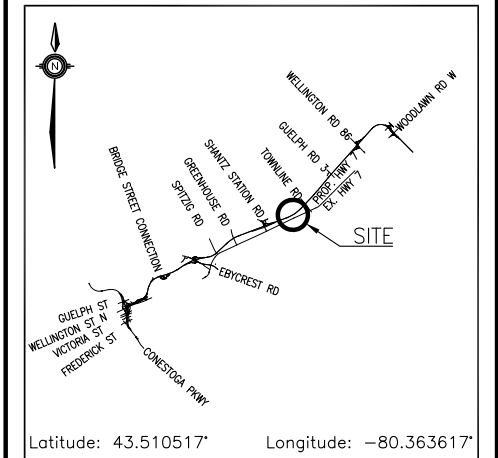THURBER ENGINEERING LTD.



KEYPLAN

LEGEND

[illegible]

-NOTES-

- 1) The boundaries between soil strata have been established only at Borehole locations. Between Boreholes the boundaries are assumed from geological evidence.
- 2) This drawing is for subsurface information only. Surface details and features are for conceptual illustration.
- 3) Coordinate system is MTM NAD 83 Zone 10.

GEOCRES No. 40P09-067

[illegible]



Appendix F.

Regional Road 30 (Shantz Station Road) – N/S-E Ramp: Station 28+420 – 28+600 (08-159)

RECORD OF BOREHOLE No 08-159

1 OF 3

METRIC

GWP# 408-88-00 LOCATION N 4 818 686.0 E 233 462.0 ORIGINATED BY SLL
 DIST HWY 7 - New BOREHOLE TYPE Hollow Stem Augers COMPILED BY WM
 DATUM Geodetic DATE 2008.06.03 - 2008.06.03 LATITUDE LONGITUDE CHECKED BY RPR

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT			UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa					
329.2	GROUND SURFACE							20 40 60 80 100		PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	
0.0	TOPSOIL: (200mm)							20 40 60 80 100		WATER CONTENT (%)			
0.2	Silty CLAY , trace gravel, occasional topsoil staining Stiff Brown Moist (FILL)		1	SS	11		329						
327.8							328						
1.4	Silty CLAY , some sand, trace gravel Hard Brown Moist (TILL)		2	SS	63		327						
			3	SS	42								0 15 40 45
			4	SS	64		326						
325.1							325						
4.1	Sandy SILT , some clay, trace to some gravel Very Dense Grey Moist (TILL)		5	SS	100/ .150		324						5 41 40 14
323.6							323						
5.6	Silty CLAY , trace sand Very Stiff to Hard Grey Moist (TILL)		6	SS	47								0 6 39 55
							322						
			7	SS	29		321						
	Occasional sand seams						320						0 3 68 29
			8	SS	46								

Continued Next Page

+³, ×³: Numbers refer to
Sensitivity

20
15
10
(%) STRAIN AT FAILURE

METRIC

SOIL PROFILE					
ELEV DEPTH	DESCRIPTION	STRAT PLOT	SAMPLES	GROUND WATER CONDITIONS	DYNAMIC CONE PENETRATION RESISTANCE PLOT
			NUMBER TYPE "N" VALUES		<div><div><div>20406080100</div><div>○ UNCONFINED + FIELD VANE</div><div>● QUICK TRIAXIAL × LAB VANE</div></div><div>PLASTIC LIMIT NATURAL MOISTURE CONTENT LIQUID LIMIT</div><div>w_P — w — w_L</div><div>WATER CONTENT (%)</div><div>204060</div></div>
	Continued From Previous Page				
313.5 15.7	<p>Silty CLAY, trace sand to sandy, trace gravel Very Stiff to Hard Grey Moist (TILL) Layer of silt till (700mm)</p>		9 SS 100/.150		319
					318
			10 SS 28		317
					316
			11 SS 23		315
					314
			12 SS 50		313
	<p>Silty SAND, some gravel, trace clay Very Dense Grey Wet (TILL)</p>		13 SS 50/.075		312
					311
			14 SS 100/.050		310
309.2					

+³, ×³: Numbers refer to Sensitivity

RECORD OF BOREHOLE No 08-159


3 OF 3

METRIC

GWP# 408-88-00 LOCATION N 4 818 686.0 E 233 462.0 ORIGINATED BY SLL
 DIST HWY 7 - New BOREHOLE TYPE Hollow Stem Augers COMPILED BY WM
 DATUM Geodetic DATE 2008.06.03 - 2008.06.03 LATITUDE _____ LONGITUDE _____ CHECKED BY RPR

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT	NATURAL MOISTURE CONTENT	LIQUID LIMIT	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa									
20.0	Continued From Previous Page END OF BOREHOLE AT 20.0m. AUGER REFUSAL ON PROBABLE BEDROCK OR BOULDER. BOREHOLE DRY UPON COMPLETION OF DRILLING. BOREHOLE BACKFILLED WITH GROUT TO 15.0m, HOLEPLUG TO 3.0m, THEN AUGER CUTTINGS TO SURFACE.		15	SS	100/ .025												

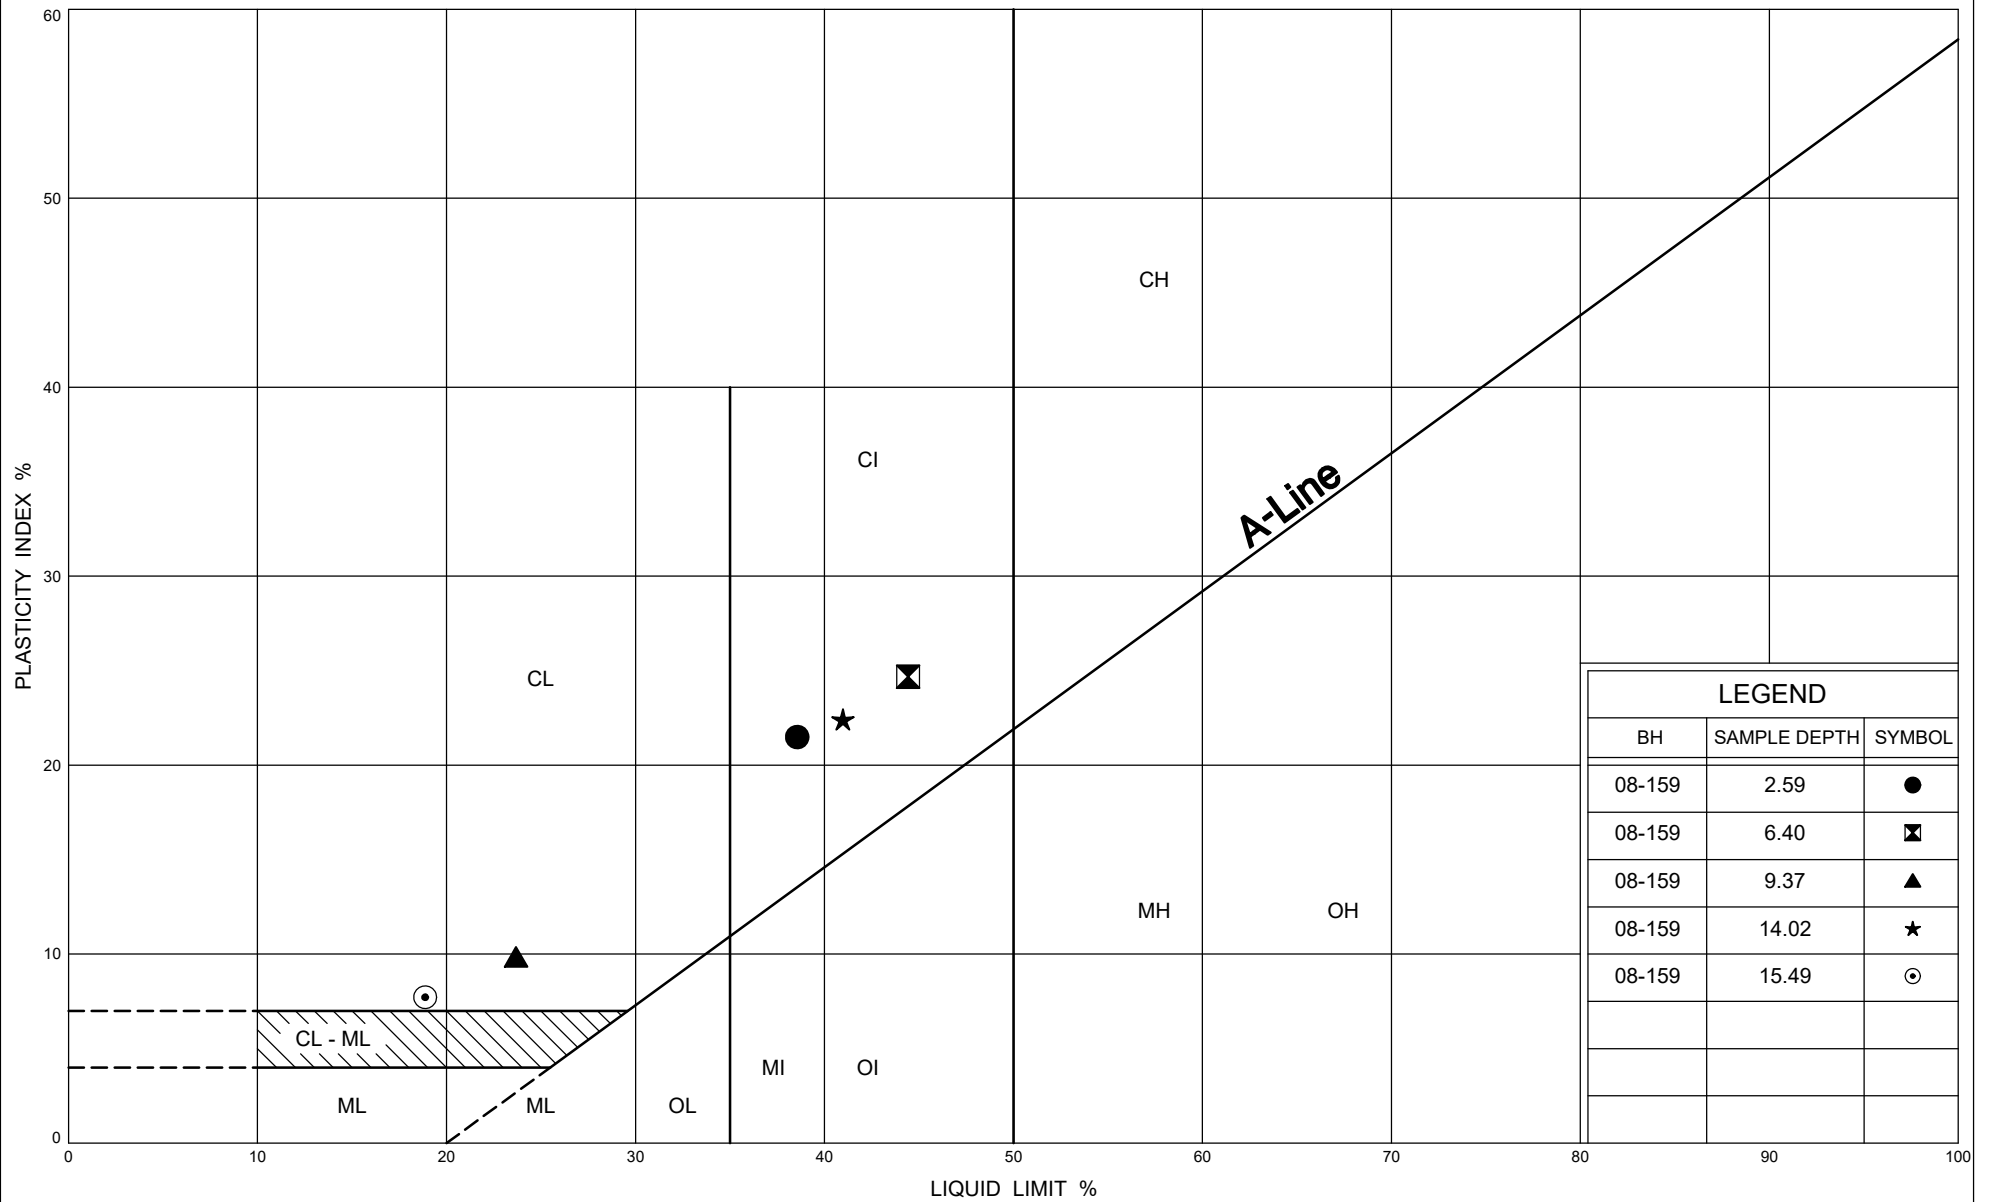ONTMT452 2020LIBRARY(MTO) - COPY.GLB MTO-11375(GINTDATA).GPJ 7/6/23



Ministry of
Transportation

PLASTICITY CHART

Silty CLAY TILL

FIG No F1

GWP 408-88-00



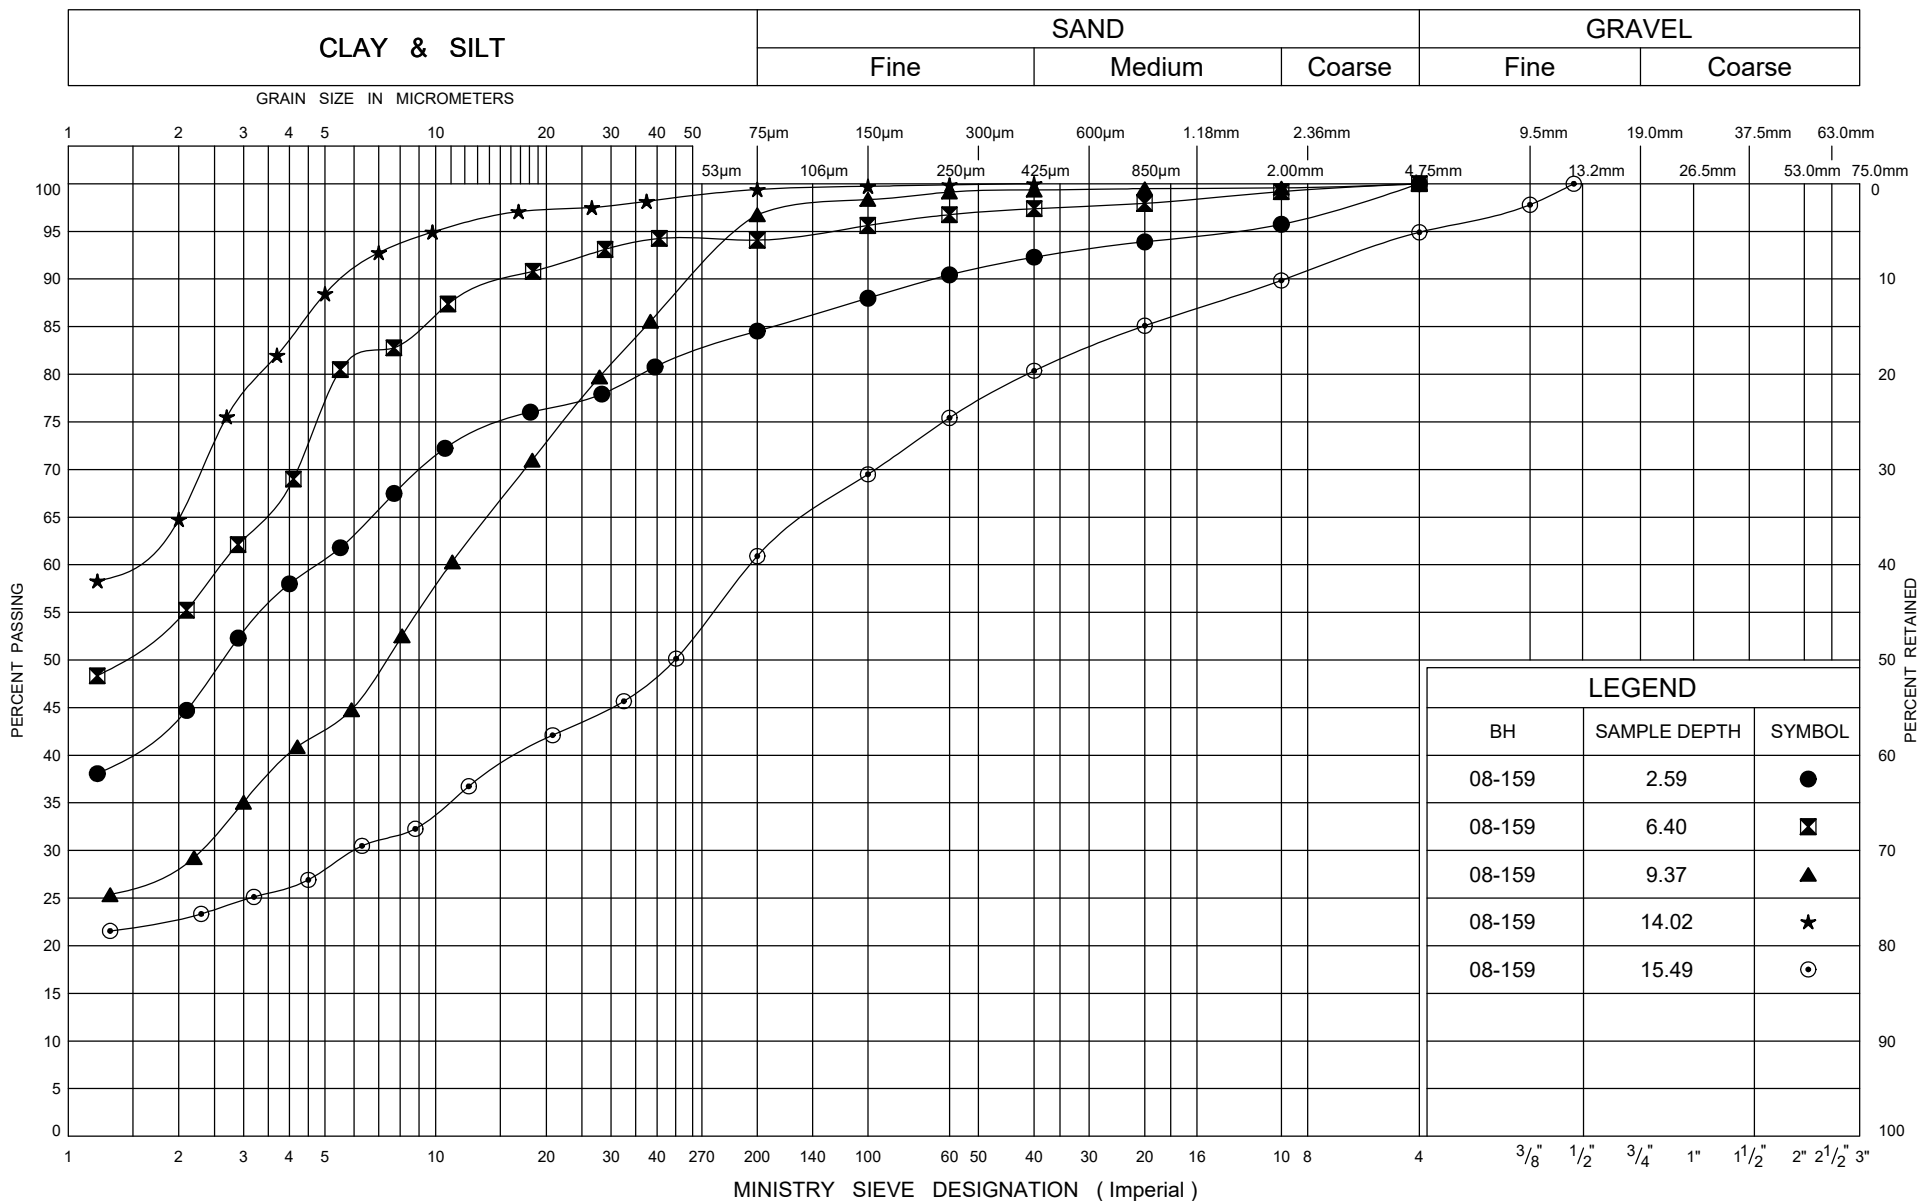
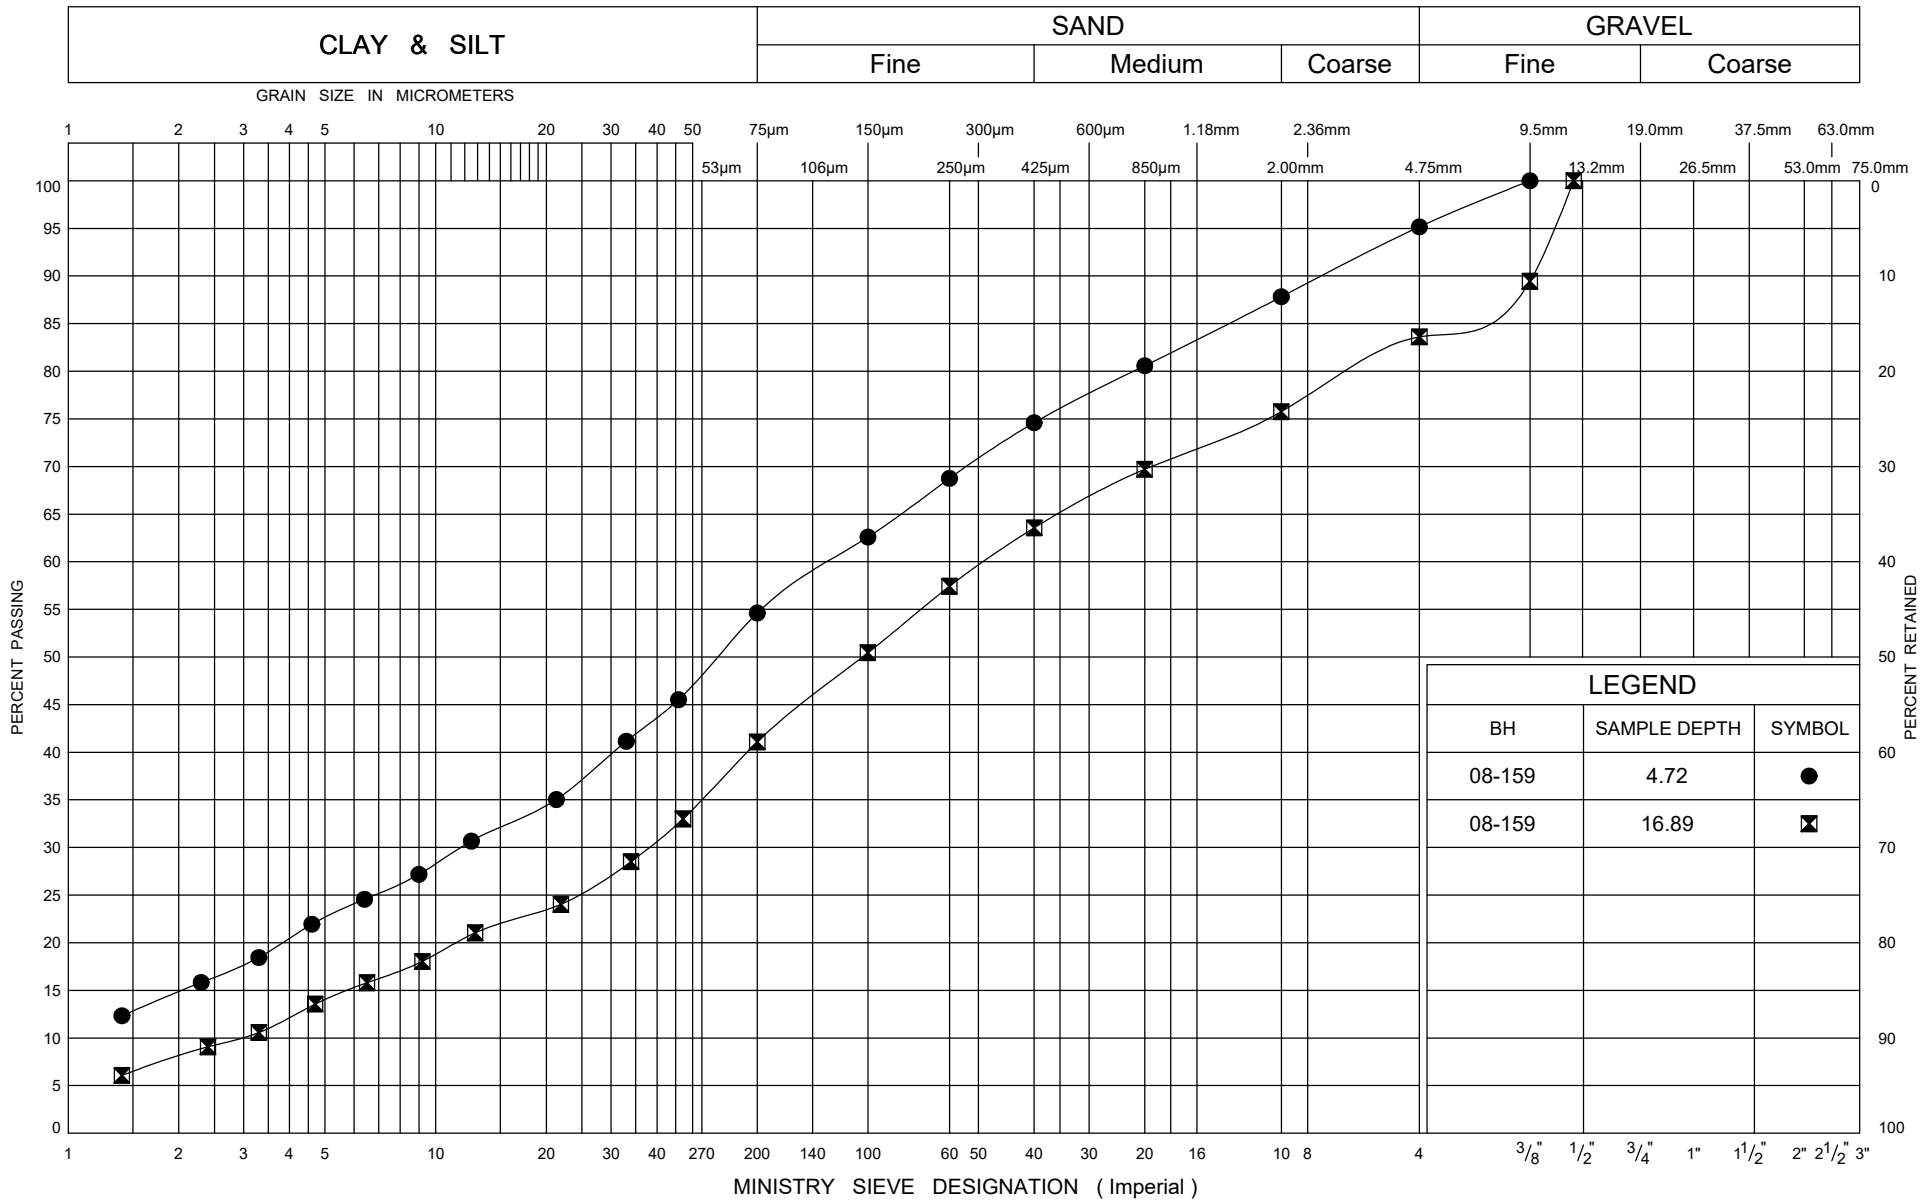




FIG No F3
GWP 408-88-00

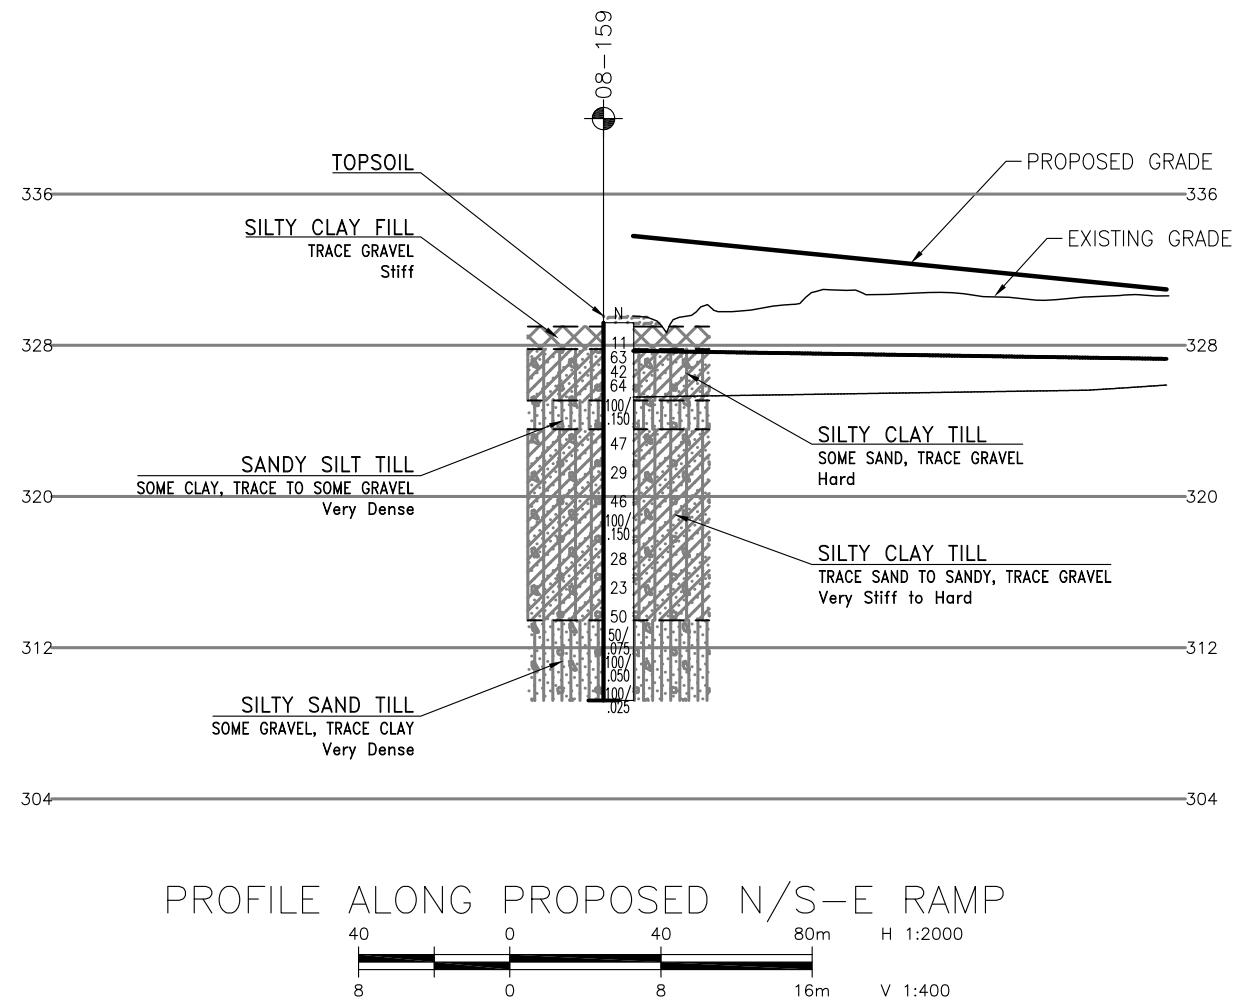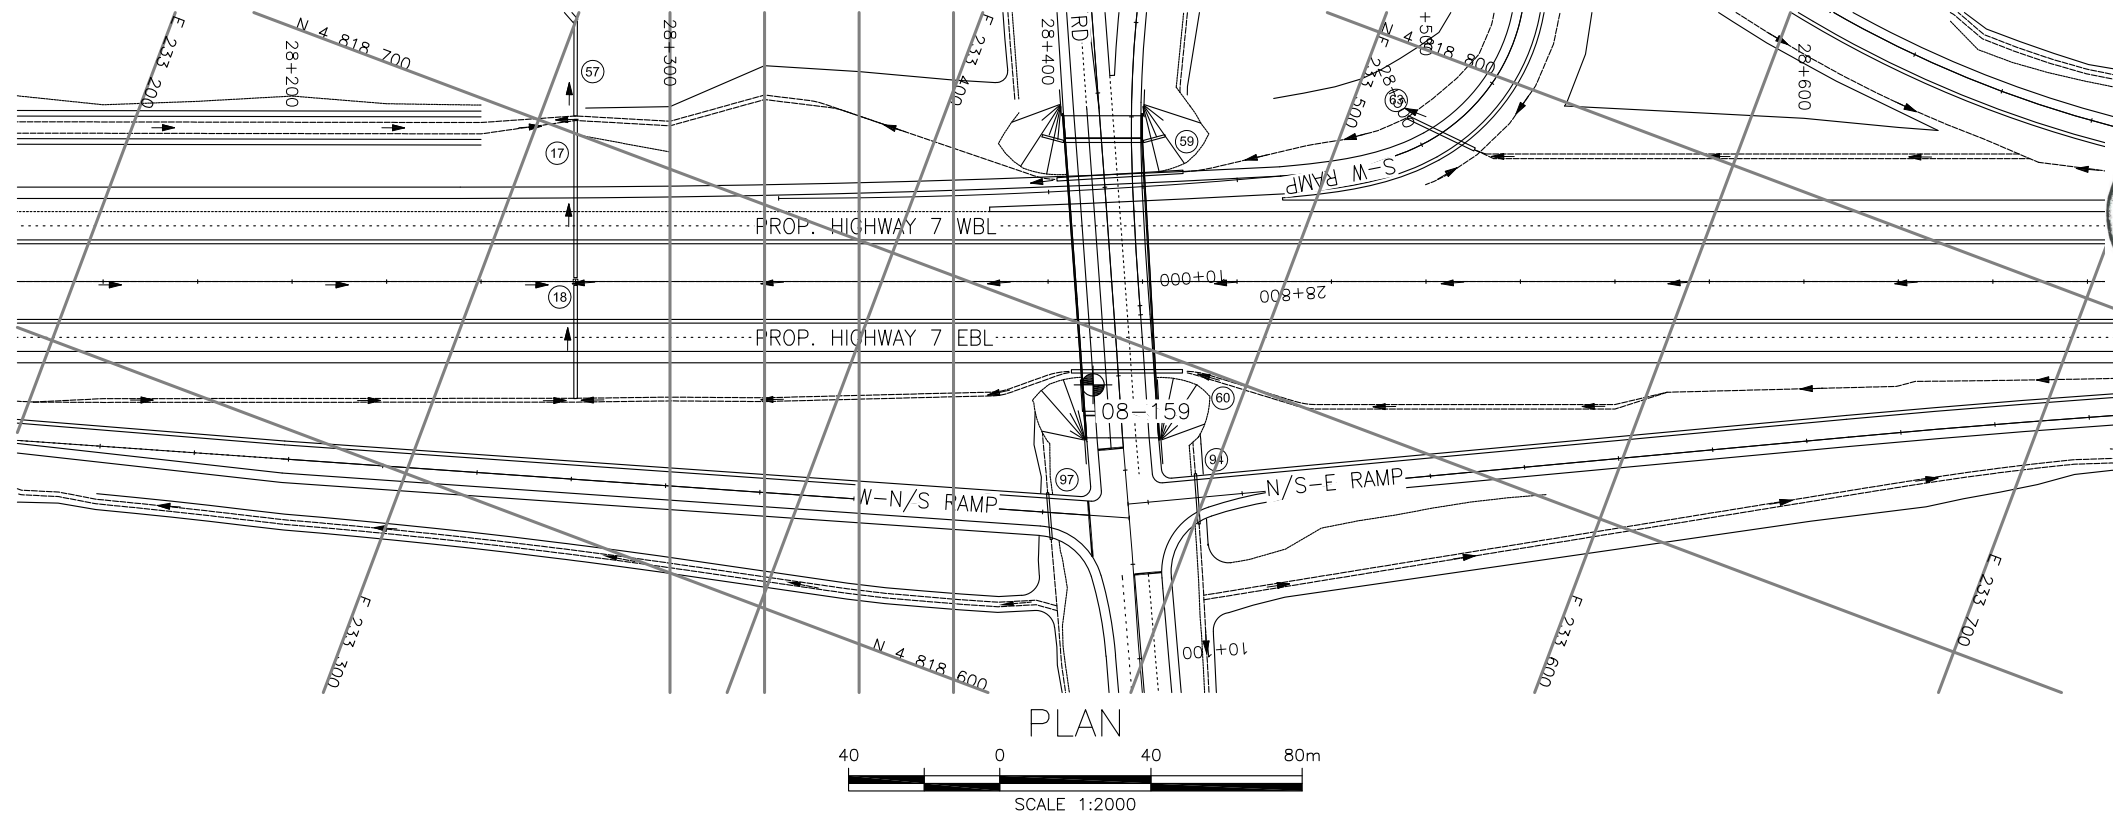ONTARIO MOT GRAIN SIZE 3 MTO-11375(GINTDATA)\GPJ_ONTARIO MOT.GDT 7/6/23





METRIC
DIMENSIONS ARE IN METRES
AND/OR MILLIMETRES
UNLESS OTHERWISE SHOWN



CONT No
GWP No 408-88-00

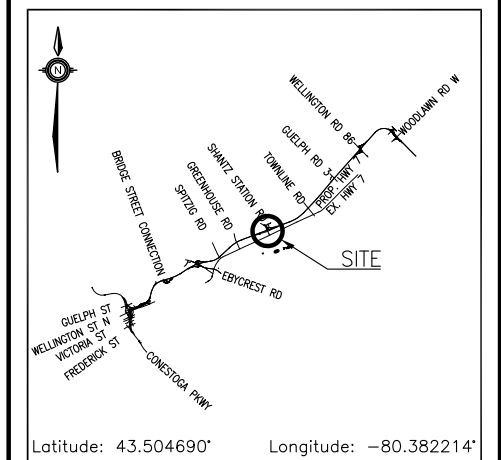
REGIONAL ROAD 30
(SHANTZ STATION ROAD)
N/S-E RAMP CUT/FILL
BOREHOLE LOCATIONS AND SOIL STRATA



SHEET








THURBER ENGINEERING LTD.



KEYPLAN

LEGEND

	Borehole (Current Investigation)
	Borehole (2008 Investigation)
N	Blows /0.3m (Std Pen Test, 475J/blow)
CONE	Blows /0.3m (60° Cone, 475J/blow)
PH	Pressure, Hydraulic
	Water Level
	Head Artesian Water
	Piezometer
90%	Rock Quality Designation (RQD)
A/R	Auger Refusal

-NOTES-

- 1) The boundaries between soil strata have been established only at Borehole locations. Between Boreholes the boundaries are assumed from geological evidence.
- 2) This drawing is for subsurface information only. Surface details and features are for conceptual illustration.
- 3) Coordinate system is MTM NAD 83 Zone 10.

GEOCRES No. 40P09-067

[illegible]



Appendix G.

Regional Road 30 (Shantz Station Road) – E-N/S Ramp: Station 28+625 – 28+675 (08-153)

RECORD OF BOREHOLE No 08-153

1 OF 1

METRIC


GWP# 408-88-00 LOCATION N 4 818 869.9 E 233 564.1 ORIGINATED BY LG
DIST HWY 7 - New BOREHOLE TYPE Solid Stem Augers COMPILED BY AN
DATUM Geodetic DATE 2008.12.02 - 2008.12.02 LATITUDE LONGITUDE CHECKED BY MEF

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT NATURAL MOISTURE CONTENT LIQUID LIMIT			UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)						
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE			"N" VALUES	SHEAR STRENGTH kPa		WATER CONTENT (%)			GR	SA	SI	CL			
331.1	GROUND SURFACE						20 40 60 80 100	○ UNCONFINED + FIELD VANE	W _P W W _L										
0.0	Sandy silty CLAY , occasional rootlets Stiff Black Moist (FILL)		1	SS	10														
330.3																			
0.8	Silty CLAY , some sand to sandy, trace gravel Very Stiff to Hard Brown Moist (TILL)		2	SS	19														
			3	SS	39														
			4	SS	100										2	34	47	17	
			5	SS	50/ 0.125														
			6	SS	77											0	18	40	42
324.6			7	SS	100/ 0.200														
6.4	END OF BOREHOLE AT 6.4m. Piezometer installation consists of 19mm diameter Schedule 40 PVC pipe with a 1.52m slotted screen. WATER LEVEL READINGS DATE DEPTH(m) ELEV.(m) 2009.01.09 3.2 327.9 2009.02.02 2.0 329.1																		

+³, ×³: Numbers refer to
Sensitivity

20
15
10

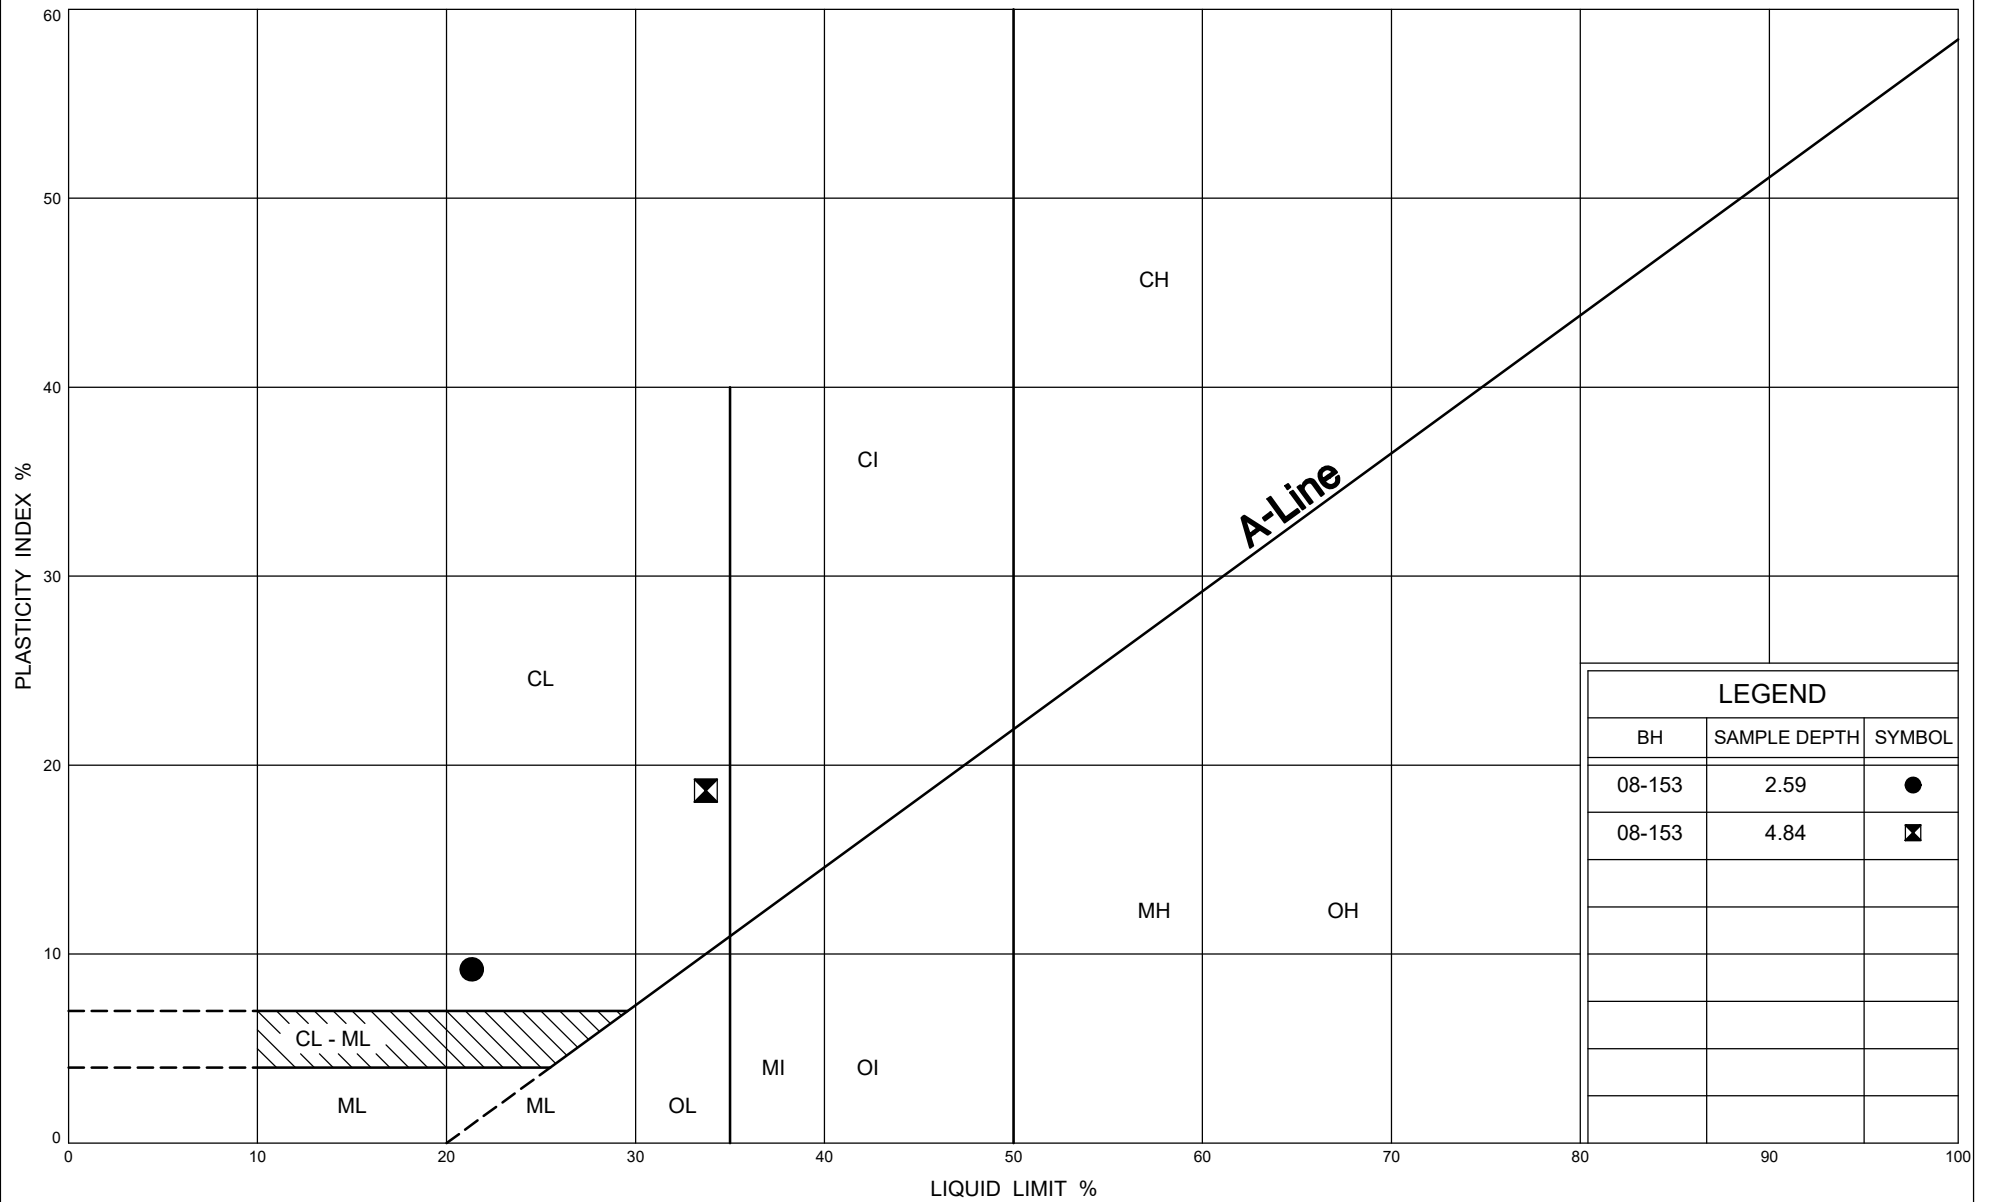(%) STRAIN AT FAILURE




Ministry of
Transportation

PLASTICITY CHART

Silty CLAY TILL

FIG No G1

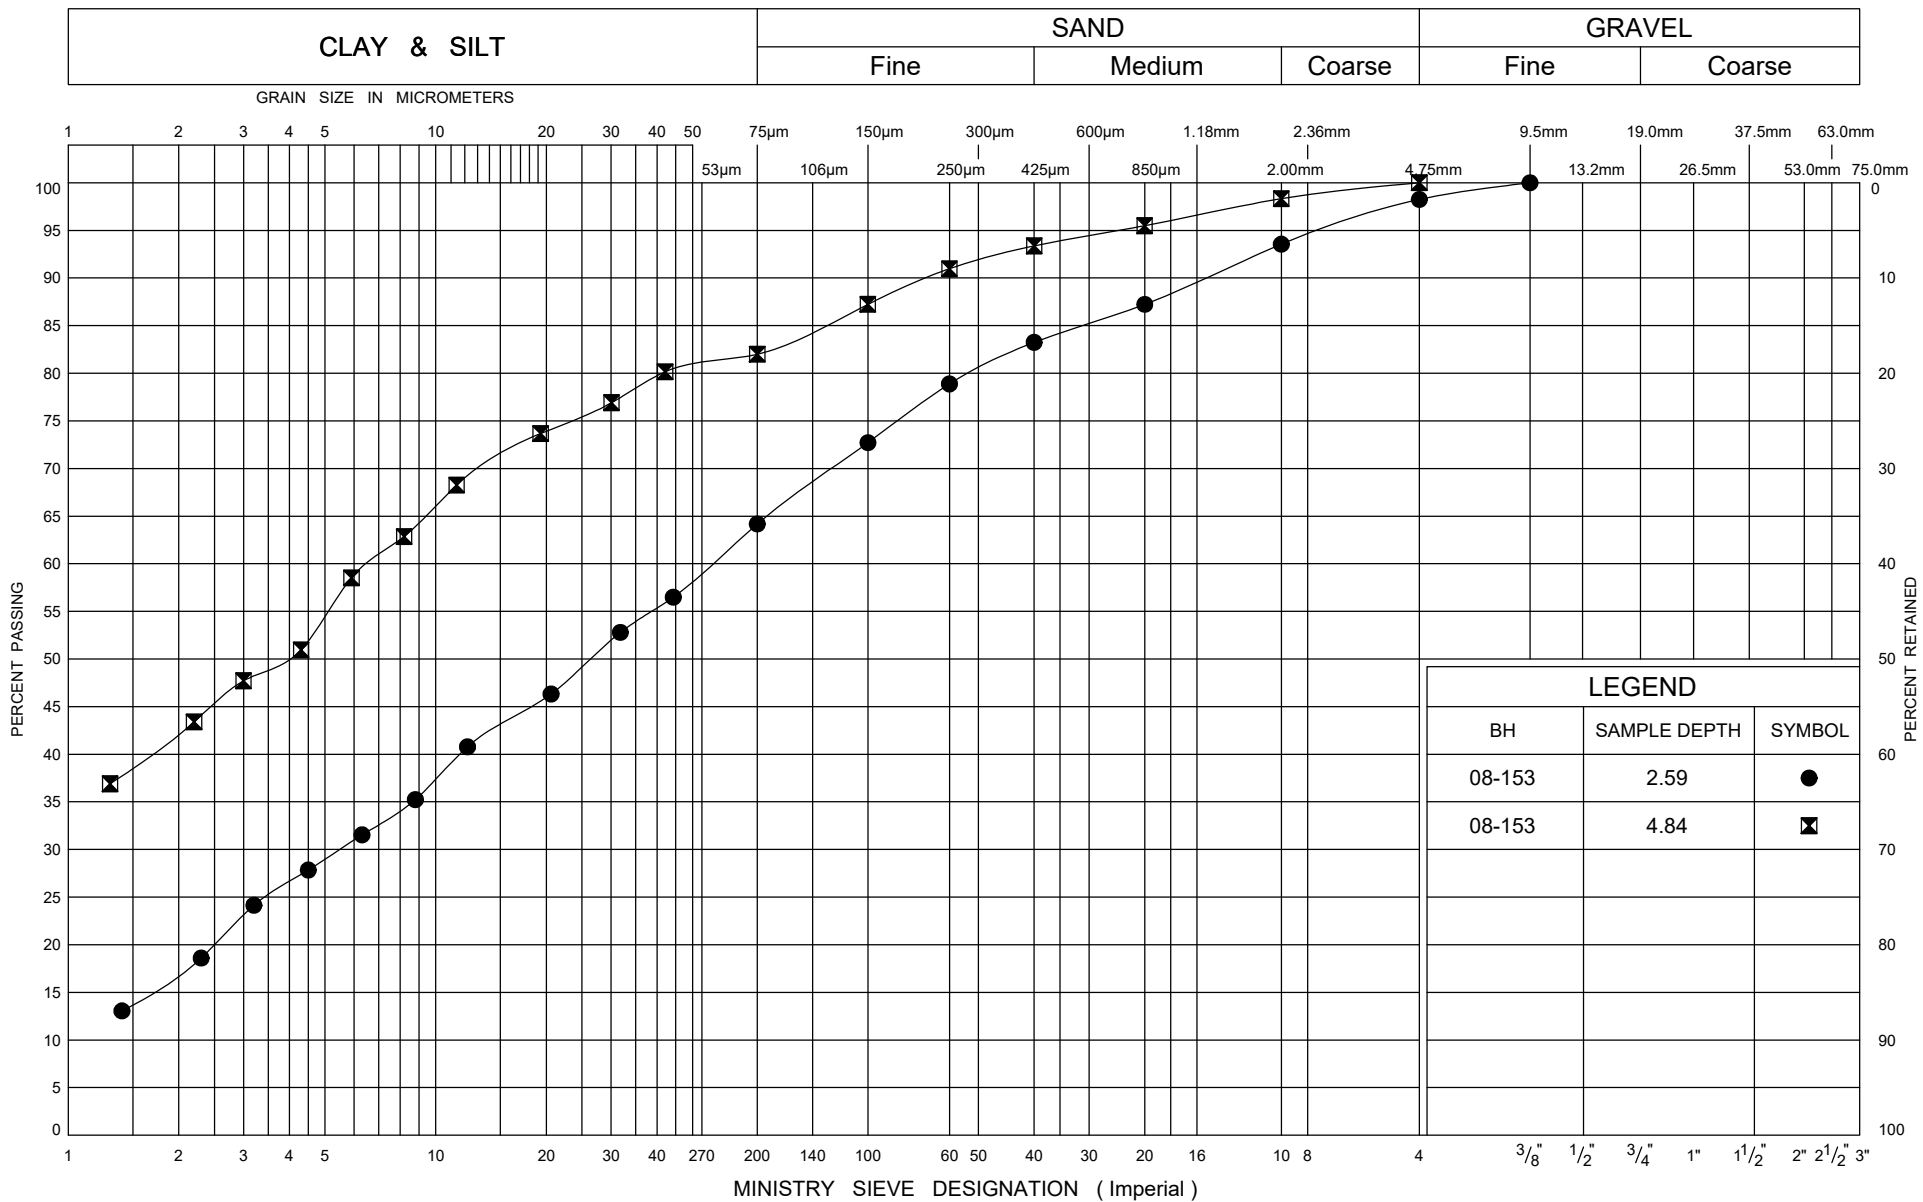GWP 408-88-00





Appendix H.

Regional Road 30 (Shantz Station Road): Station 8+850 – 9+925 (08-152, SH16 09+880)

RECORD OF BOREHOLE No 08-152

1 OF 1

METRIC

GWP# 408-88-00 LOCATION N 4 818 786.0 E 233 381.2 ORIGINATED BY SLL
 DIST HWY 7 - New BOREHOLE TYPE Hollow Stem Augers COMPILED BY WM
 DATUM Geodetic DATE 2008.05.30 - 2008.05.30 LATITUDE LONGITUDE CHECKED BY RPR

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT				PLASTIC LIMIT W P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa ○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL × LAB VANE									WATER CONTENT (%)
327.6	GROUND SURFACE							20	40	60	80	100					
0.0	TOPSOIL: (175mm)							20	40	60	80	100					
0.2	SAND, some silt, occasional rootlets Compact Dark Brown Wet		1	SS	17		327							○			
326.2																	
1.4	SILT, some sand to sandy, some clay, trace gravel Compact to Very Dense Brown Moist (TILL)		2	SS	27		326							○			
	Layer of gravelly silty sand, occasional cobbles		3	SS	90		325							○			30 53 17 (SI+CL)
	Layer of silty sand		4	SS	24		324							○			0 54 36 10
			5	SS	75		323							○			0 17 79 4
							322										
			6	SS	30		321							○			
320.9	END OF BOREHOLE AT 6.7m. BOREHOLE BACKFILLED WITH BENTONITE BENSEAL AND AUGER CUTTING TO SURFACE.																
6.7																	

+³, ×³: Numbers refer to Sensitivity 20 15 10 5 0 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No SH16 09+880

1 OF 1

METRIC

GWP# 408-88-00 LOCATION Shantz Station Road, MTM NAD 83 Zone 10: N 4 818 822.3 E 233 406.9 ORIGINATED BY OA
 DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MFA
 DATUM Geodetic DATE 2017.06.30 - 2017.06.30 LATITUDE LONGITUDE CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa							
								○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL × LAB VANE							
330.8	GROUND SURFACE						20	40	60	80	100	PLASTIC LIMIT	NATURAL MOISTURE CONTENT	LIQUID LIMIT	
0.0	Gravelly SAND , some silt Compact Brown to Grey Moist (FILL)		1	SS	29							○			
			2	SS	30							○			
329.4															
1.4	Sandy SILT , trace clay Compact to Dense Brown to Grey Moist to Wet (TILL)		3	SS	22							○			
			4	SS	44							○			
			5	SS	37							○			
			6	SS	44							○			
325.6															
5.2	END OF BOREHOLE AT 5.2m. WATER LEVEL AT 4.6m UPON COMPLETION. BOREHOLE BACKFILLED WITH BENTONITE AND AUGER CUTTINGS TO SURFACE.														

ONTMT452 2020LIBRARY(MTO) - COPY.GLB MTO-11375(GINTDATA).GPJ 8/2/23



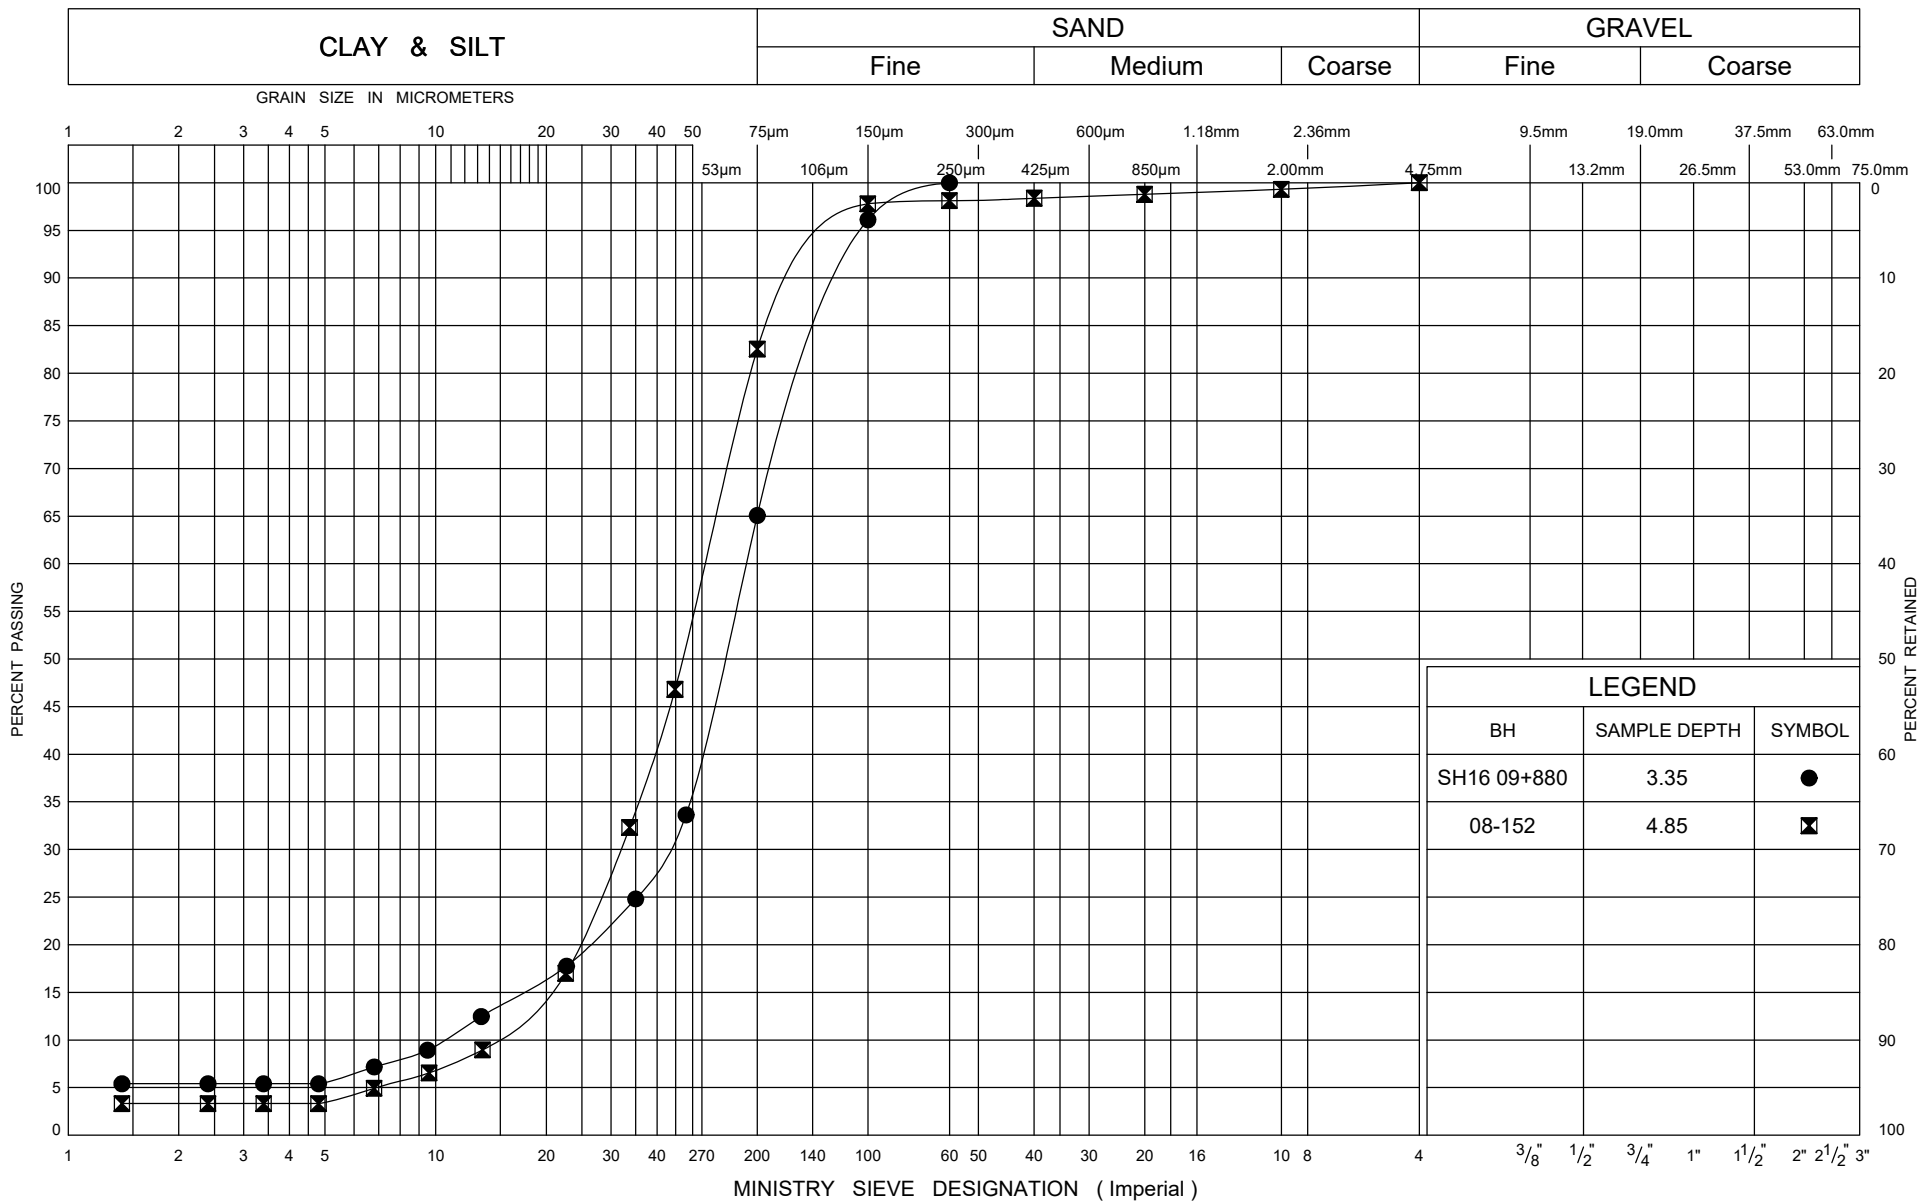




FIG No H2
GWP 408-88-00

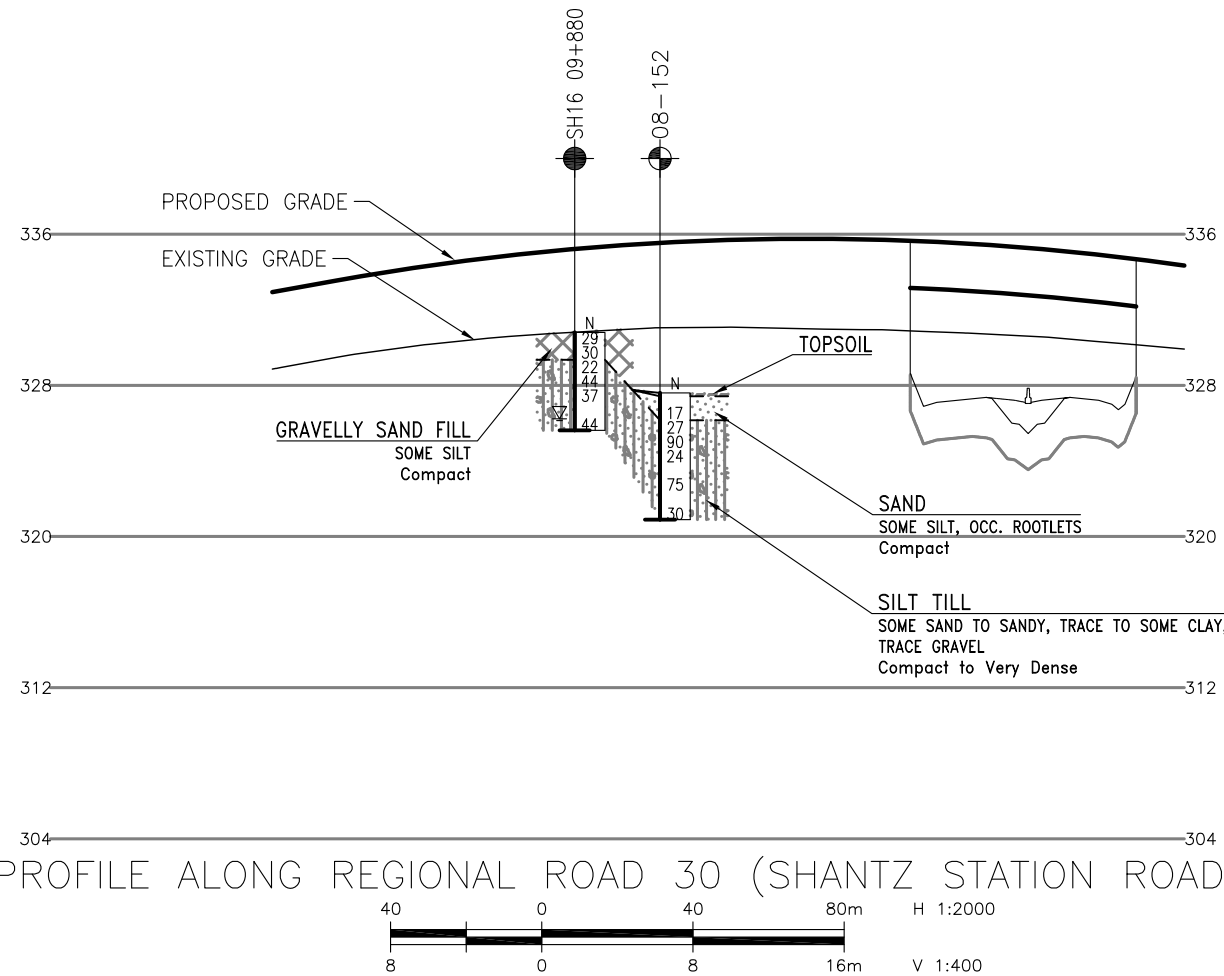

FIG No H3
GWP 408-88-00

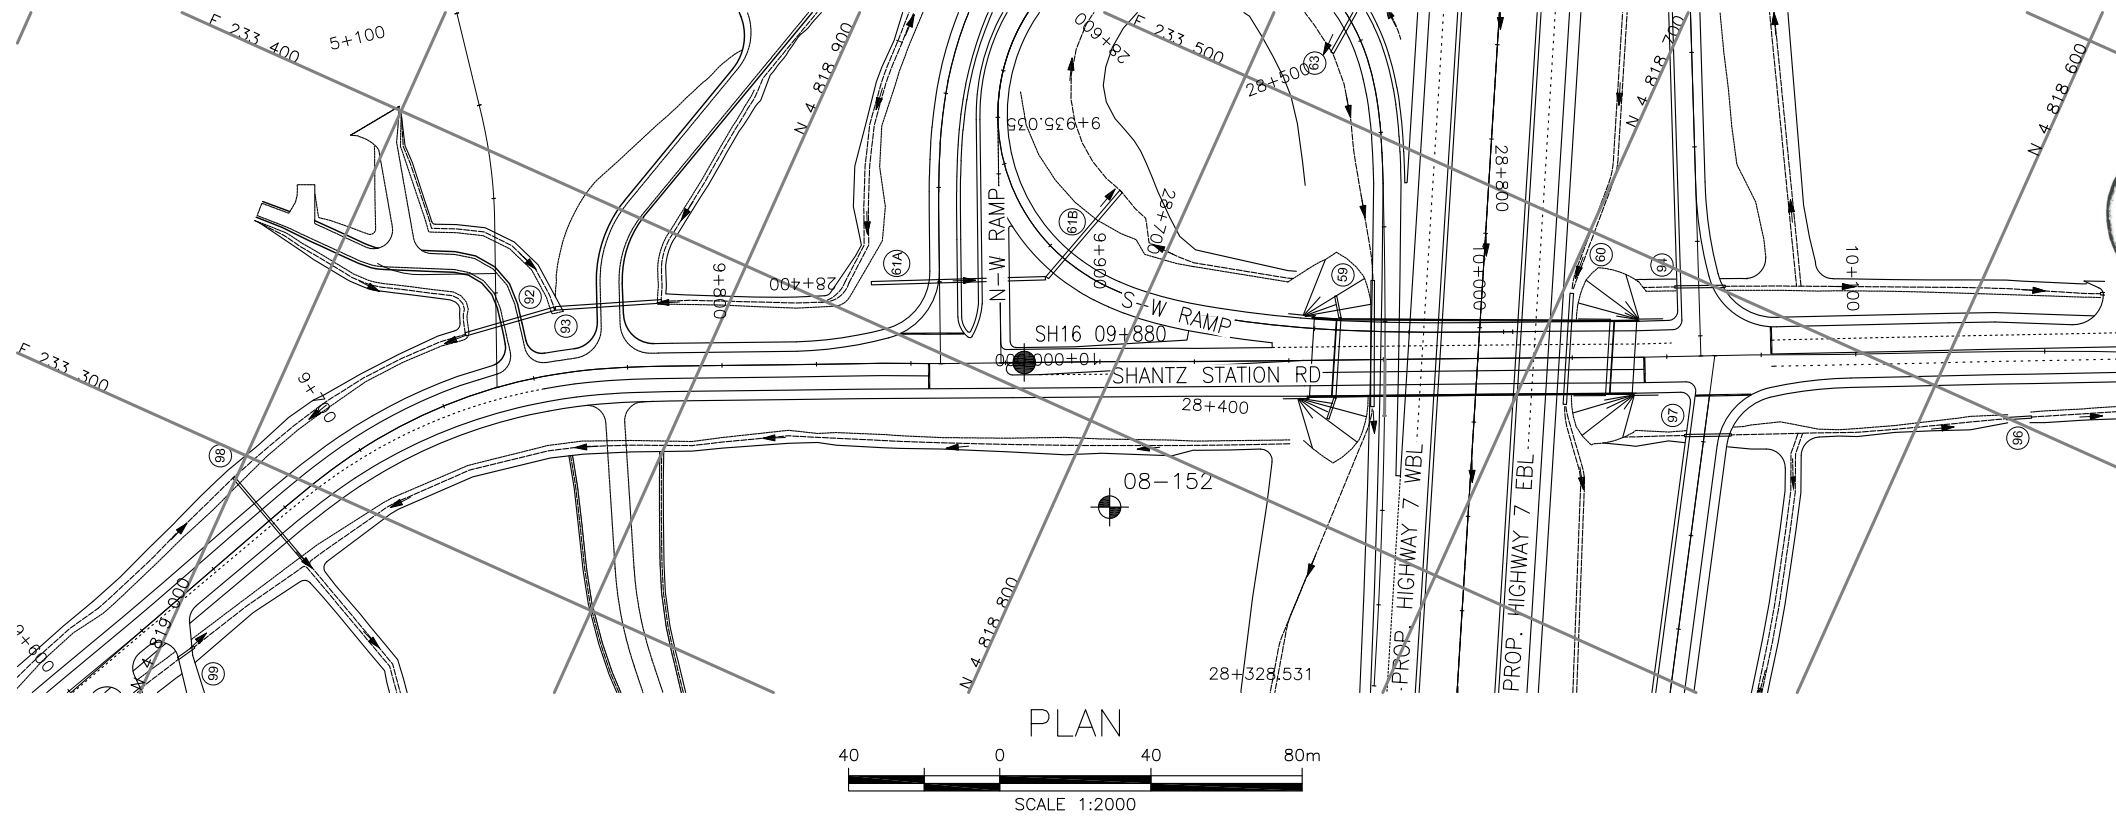

METRIC
DIMENSIONS ARE IN METRES
AND/OR MILLIMETRES
UNLESS OTHERWISE SHOWN



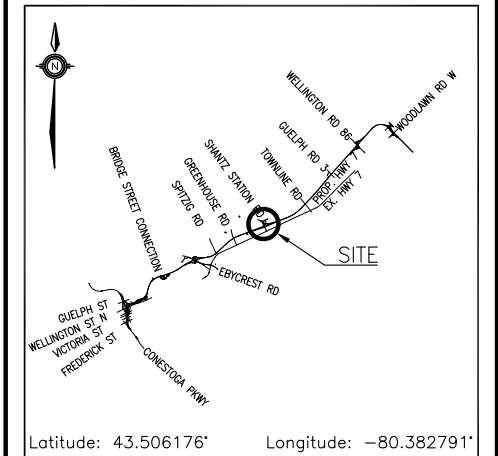
CONT No
GWP No 408-88-00

REGIONAL ROAD 30
(SHANTZ STATION ROAD)

BOREHOLE LOCATIONS AND SOIL STRATA








THURBER ENGINEERING LTD.



KEYPLAN

LEGEND

	Borehole (Current Investigation)
	Borehole (2008 Investigation)
N	Blows /0.3m (Std Pen Test, 475J/blow)
CONE	Blows /0.3m (60° Cone, 475J/blow)
PH	Pressure, Hydraulic
	Water Level
	Head Artesian Water
	Piezometer
90%	Rock Quality Designation (RQD)
A/R	Auger Refusal

NO	ELEVATION	NORTHING	EASTING
SH16 09+880	330.8	4 818 822.3	233 406.9
08-152	327.6	4 818 786.0	233 381.2

-NOTES-

- 1) The boundaries between soil strata have been established only at Borehole locations. Between Boreholes the boundaries are assumed from geological evidence.
- 2) This drawing is for subsurface information only. Surface details and features are for conceptual illustration.
- 3) Coordinate system is MTM NAD 83 Zone 10.

GEOCRES No. 40P09-067

[illegible]



Appendix I.

**Highway 7: Station 29+200 – 29+400 (ML16 29+200, ML16 29+250, ML16 29+300,
ML16 29+350, ML16 29+400)**

RECORD OF BOREHOLE No ML16 29+200 1 OF 1 METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 818 990.1 E 234 196.1 ORIGINATED BY BL
DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MP
DATUM Geodetic DATE 2018.06.26 - 2018.06.26 LATITUDE 43.507497 LONGITUDE -80.373176 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)			
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa									
334.6	GROUND SURFACE							20	40	60	80	100	PLASTIC LIMIT w _p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L		
0.0	TOPSOIL: (300mm)																
334.3			1	SS	7		334										2 43 39 16
0.3	Clayey SILT , and sand, trace gravel Firm to Stiff Brown Moist (TILL)		2	SS	10		333										6 36 39 19
			3	SS	15		332										
332.4			4	SS	53		331										
2.2	Sandy Silty CLAY , trace gravel, occasional cobbles Hard Brown Moist (TILL)		5	SS	100/ 0.275		330										2 34 43 21
	Auger grinding at 3.8m		6	SS	93		329										
			7	SS	100/ 0.250												
328.1																	
6.5	END OF BOREHOLE AT 6.5m. BOREHOLE DRY UPON COMPLETION. BOREHOLE BACKFILLED WITH AUGER CUTTINGS TO SURFACE.																

ONTMT452 2020LIBRARY(MTO) - COPY.GLB MTO-11375(GINTDATA).GPJ 7/6/23

RECORD OF BOREHOLE No ML16 29+250 1 OF 2 METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 819 007.0 E 234 236.6 ORIGINATED BY BL
 DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MP
 DATUM Geodetic DATE 2018.06.26 - 2018.06.26 LATITUDE 43.507653 LONGITUDE -80.372677 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa							
								20 40 60 80 100							
								○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL × LAB VANE							
					WATER CONTENT (%)										
					W P W W L										
335.4	GROUND SURFACE														
0.0	TOPSOIL: (450mm)		1	SS	7		335								
334.9															
0.5	Silty CLAY , trace sand, trace gravel Firm to Very Stiff Brown Moist		2	SS	7		334								
			3	SS	21		333								1 8 34 57
			4	SS	28		332								
			5	SS	24		331								
331.3							330								
4.1	Sandy Silty CLAY , trace gravel, occasional cobbles Hard Brown Moist (TILL)		6	SS	58		329								
							328								
	Auger grinding at 6.1m		7	SS	64		327								
			8	SS	54										1 26 42 31
	Auger grinding at 8.7m														
326.0			9	SS	100/										
9.3	END OF BOREHOLE AT 9.3m. BOREHOLE DRY UPON COMPLETION. BOREHOLE BACKFILLED WITH				0.050										

Continued Next Page

+³, ×³: Numbers refer to
Sensitivity

20
15
10
(%) STRAIN AT FAILURE

2 OF 2

ORIGINATED BY BL

COMPILED BY ME



CHECKED BY JP

 γ
kN/m³

+³, ×³: Numbers refer to Sensitivity

RECORD OF BOREHOLE No ML16 29+300 1 OF 2 METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 819 024.7 E 234 283.7 ORIGINATED BY BL
 DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MP
 DATUM Geodetic DATE 2018.06.26 - 2018.06.26 LATITUDE 43.507816 LONGITUDE -80.372097 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)							
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa													
								○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL × LAB VANE													
336.0	GROUND SURFACE							20	40	60	80	100	PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	WATER CONTENT (%)	GR	SA	SI	CL	
0.0	TOPSOIL: (600mm)		1	SS	5																
335.4																					
0.6	Silty CLAY , trace to some sand, trace gravel, occasional cobbles Stiff to Hard Brown to Grey Moist																				
			2	SS	14																
			3	SS	30																
			4	SS	25																
			5	SS	24																
	Layer of silt		6	SS	34															0 0 78 22	

Continued Next Page

+³, ×³: Numbers refer to Sensitivity 20 15 10 5 (%) STRAIN AT FAILURE

METRIC

GWP#	408-88-00	LOCATION	Mainline, MTM NAD 83 Zone 10: N 4 819 024.7 E 234 283.7			ORIGINATED BY	BL
DIST	HWY 7	BOREHOLE TYPE	Hollow Stem Augers			COMPILED BY	MP
DATUM	Geodetic	DATE	2018.06.26 - 2018.06.26	LATITUDE	43.507816	LONGITUDE	-80.372097
		CHECKED BY	JPL				





[illegible]

ONTMT4S2 2020LIBRARY(MTO) - COPY.GLB MTO-11375(GINTDATA).GPJ 7/6/23

+³, ×³: Numbers refer to Sensitivity

RECORD OF BOREHOLE No ML16 29+350 1 OF 2 METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 819 039.5 E 234 323.0 ORIGINATED BY BL
 DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MP
 DATUM Geodetic DATE 2018.06.26 - 2018.06.26 LATITUDE 43.507954 LONGITUDE -80.371613 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT				PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa ○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL × LAB VANE								
336.5	GROUND SURFACE							20	40	60	80	100				
0.0	TOPSOIL: (450mm)		1	SS	10									○		
336.0														○		
0.5	Silty CLAY , some sand, trace gravel, occasional cobbles Stiff to Hard Brown to Grey Moist		2	SS	12									○		
														○		
			3	SS	24									○		
			4	SS	86									○		
			5	SS	55									○	├──┤	
332.4																
4.1	Sandy Silty CLAY , trace gravel Hard Brown Moist (TILL)		6	SS	34									○		
														○		
			7	SS	45									○		
			8	SS	37									○		
328.2																
8.3	Silty CLAY to CLAY , trace sand Very Stiff Grey Moist		9	SS	29									○		
			10	SS	22									○		

Continued Next Page

+³, ×³: Numbers refer to
Sensitivity

20
15
10
(%) STRAIN AT FAILURE

RECORD OF BOREHOLE No ML16 29+350 2 OF 2 METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 819 039.5 E 234 323.0 ORIGINATED BY BL
DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MP
DATUM Geodetic DATE 2018.06.26 - 2018.06.26 LATITUDE 43.507954 LONGITUDE -80.371613 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)					
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa						WATER CONTENT (%)					
	Continued From Previous Page							<div>20406080100</div> <div>○ UNCONFINED + FIELD VANE</div> <div>● QUICK TRIAXIAL × LAB VANE</div>					<div>PLASTIC LIMIT NATURAL MOISTURE CONTENT LIQUID LIMIT</div> <div>W_P W W_L</div>		GR SA SI CL				
	Silty CLAY to CLAY , trace sand Very Stiff Grey Moist		11	SS	20		326						○					0 2 31 67	
			12	SS	21		325						○						
324.7																			
11.7	Sandy SILT , some gravel Very Dense Brown Moist (TILL)																		
323.9			13	SS	100/ 0.225		324						○						
12.6	END OF BOREHOLE AT 12.6m. BOREHOLE CAVED TO 12.2m AND DRY UPON COMPLETION. BOREHOLE BACKFILLED WITH BENTONITE HOLEPLUG TO 11.0m, THEN AUGER CUTTINGS TO SURFACE.																		

RECORD OF BOREHOLE No ML16 29+400 1 OF 2 METRIC

GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 819 057.6 E 234 376.7 ORIGINATED BY BL
 DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MP
 DATUM Geodetic DATE 2018.06.26 - 2018.06.26 LATITUDE 43.508122 LONGITUDE -80.370951 CHECKED BY JPL

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL				
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa										
336.5	GROUND SURFACE							20	40	60	80	100						
0.0	TOPSOIL: (375mm)																	
336.1			1	SS	5													
0.4	Sandy clayey SILT , trace gravel, occasional cobbles Firm to Very Stiff Brown Moist (TILL)		2	SS	20													1 26 58 15
			3	SS	20													
334.3																		
2.2	Sandy silty CLAY , trace gravel, occasional cobbles Hard Brown to Grey Moist (TILL)		4	SS	50													
			5	SS	69													
			6	SS	73													
			7	SS	55													
			8	SS	43													
			9	SS	70													
								</										

Continued Next Page

+³, ×³: Numbers refer to
Sensitivity

20
15
10


(%) STRAIN AT FAILURE

RECORD OF BOREHOLE No ML16 29+400 2 OF 2 METRIC


GWP# 408-88-00 LOCATION Mainline, MTM NAD 83 Zone 10: N 4 819 057.6 E 234 376.7 ORIGINATED BY BL
 DIST HWY 7 BOREHOLE TYPE Hollow Stem Augers COMPILED BY MP
 DATUM Geodetic DATE 2018.06.26 - 2018.06.26 LATITUDE 43.508122 LONGITUDE -80.370951 CHECKED BY JPL


SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			20	40	60	80	100					
	Continued From Previous Page BOREHOLE CAVED TO 9.1m AND DRY UPON COMPLETION. BOREHOLE BACKFILLED WITH AUGER CUTTINGS TO SURFACE.																

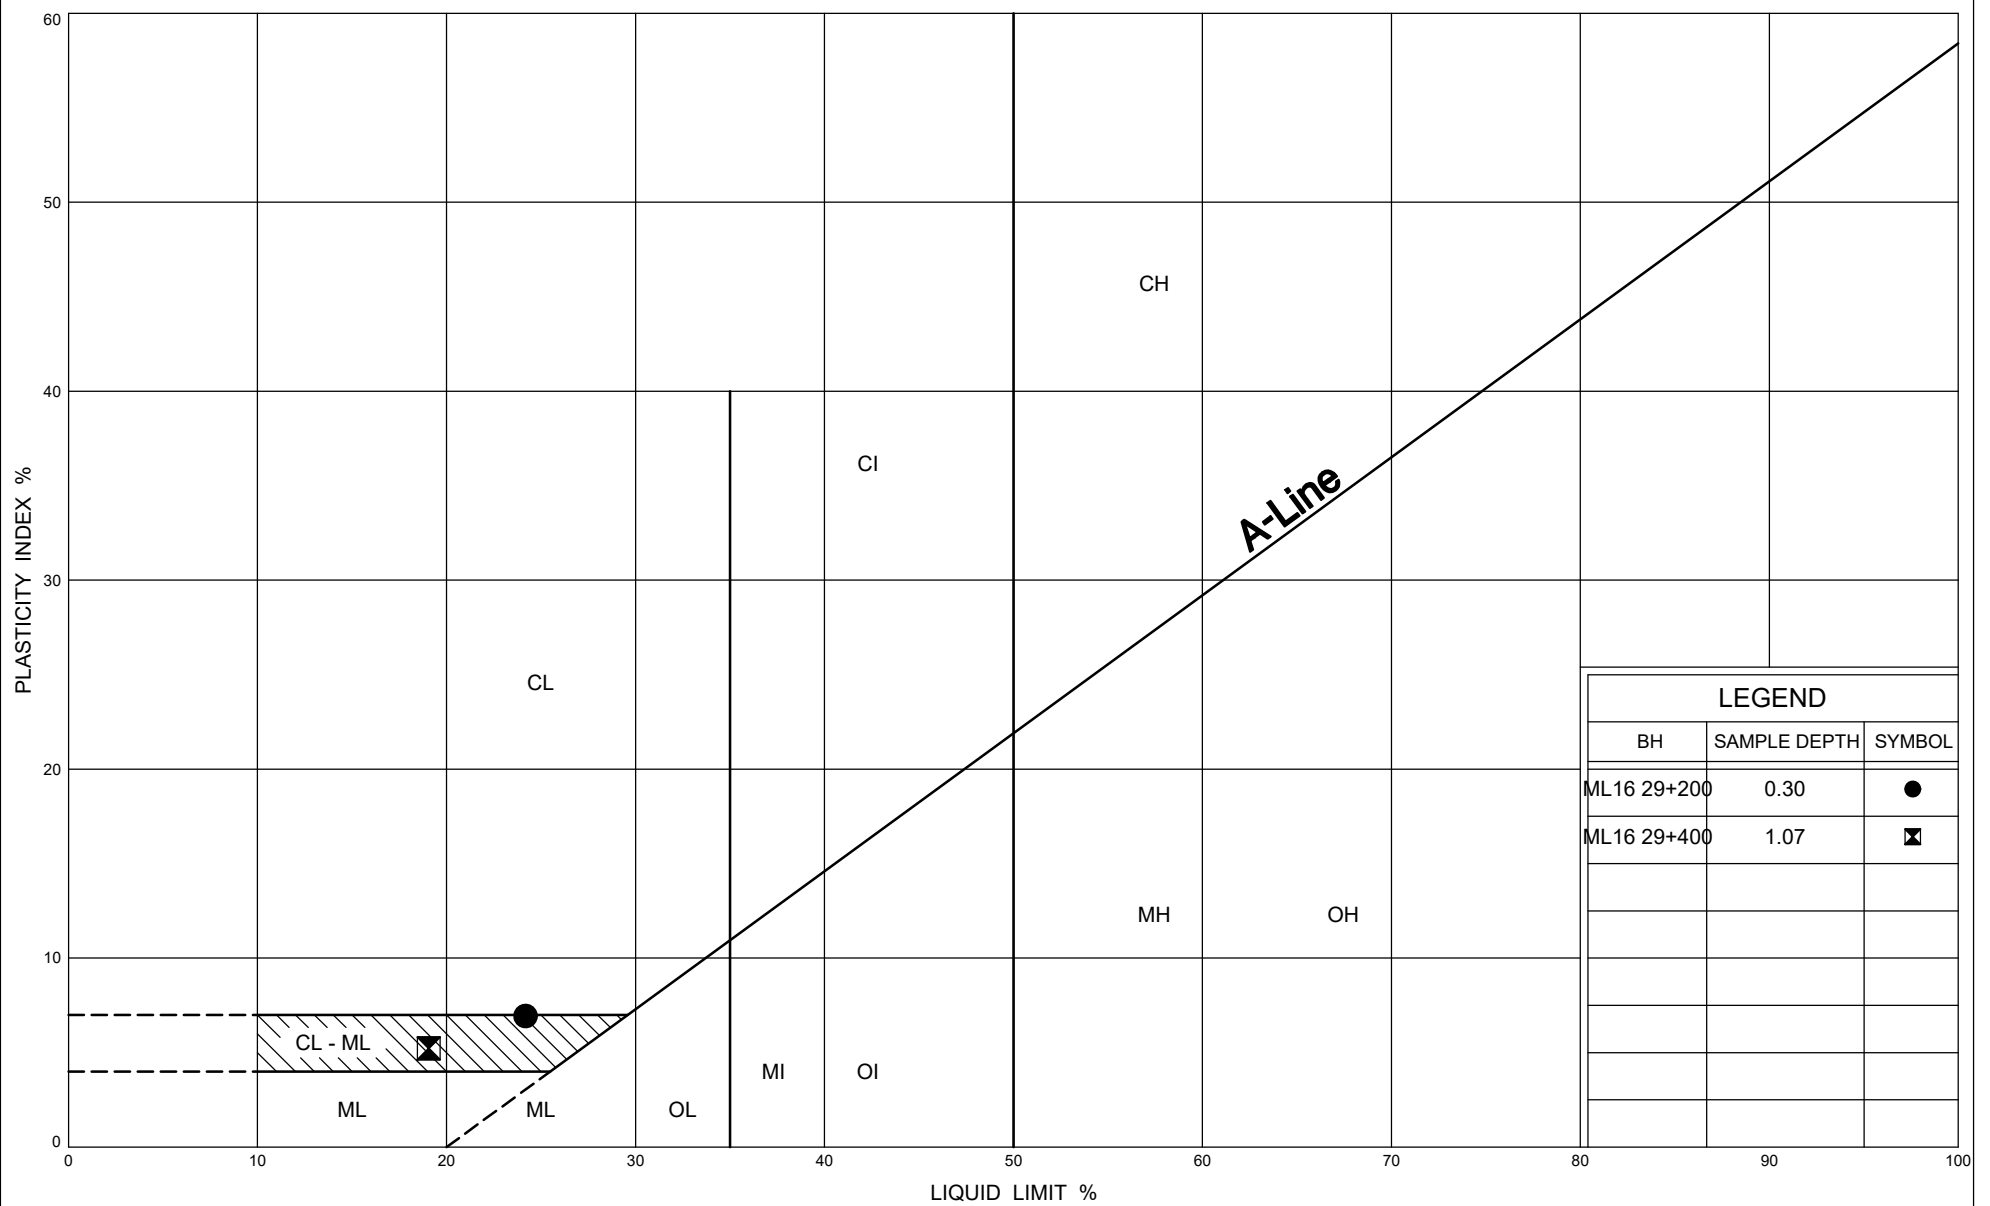ONTMT452 2020LIBRARY(MTO) - COPY.GLB MTO-11375(GINTDATA).GPJ 7/6/23



LEGEND		
BH	SAMPLE DEPTH	SYMBOL
ML 16 29+200	0.30	●
ML 16 29+400	1.07	⊗

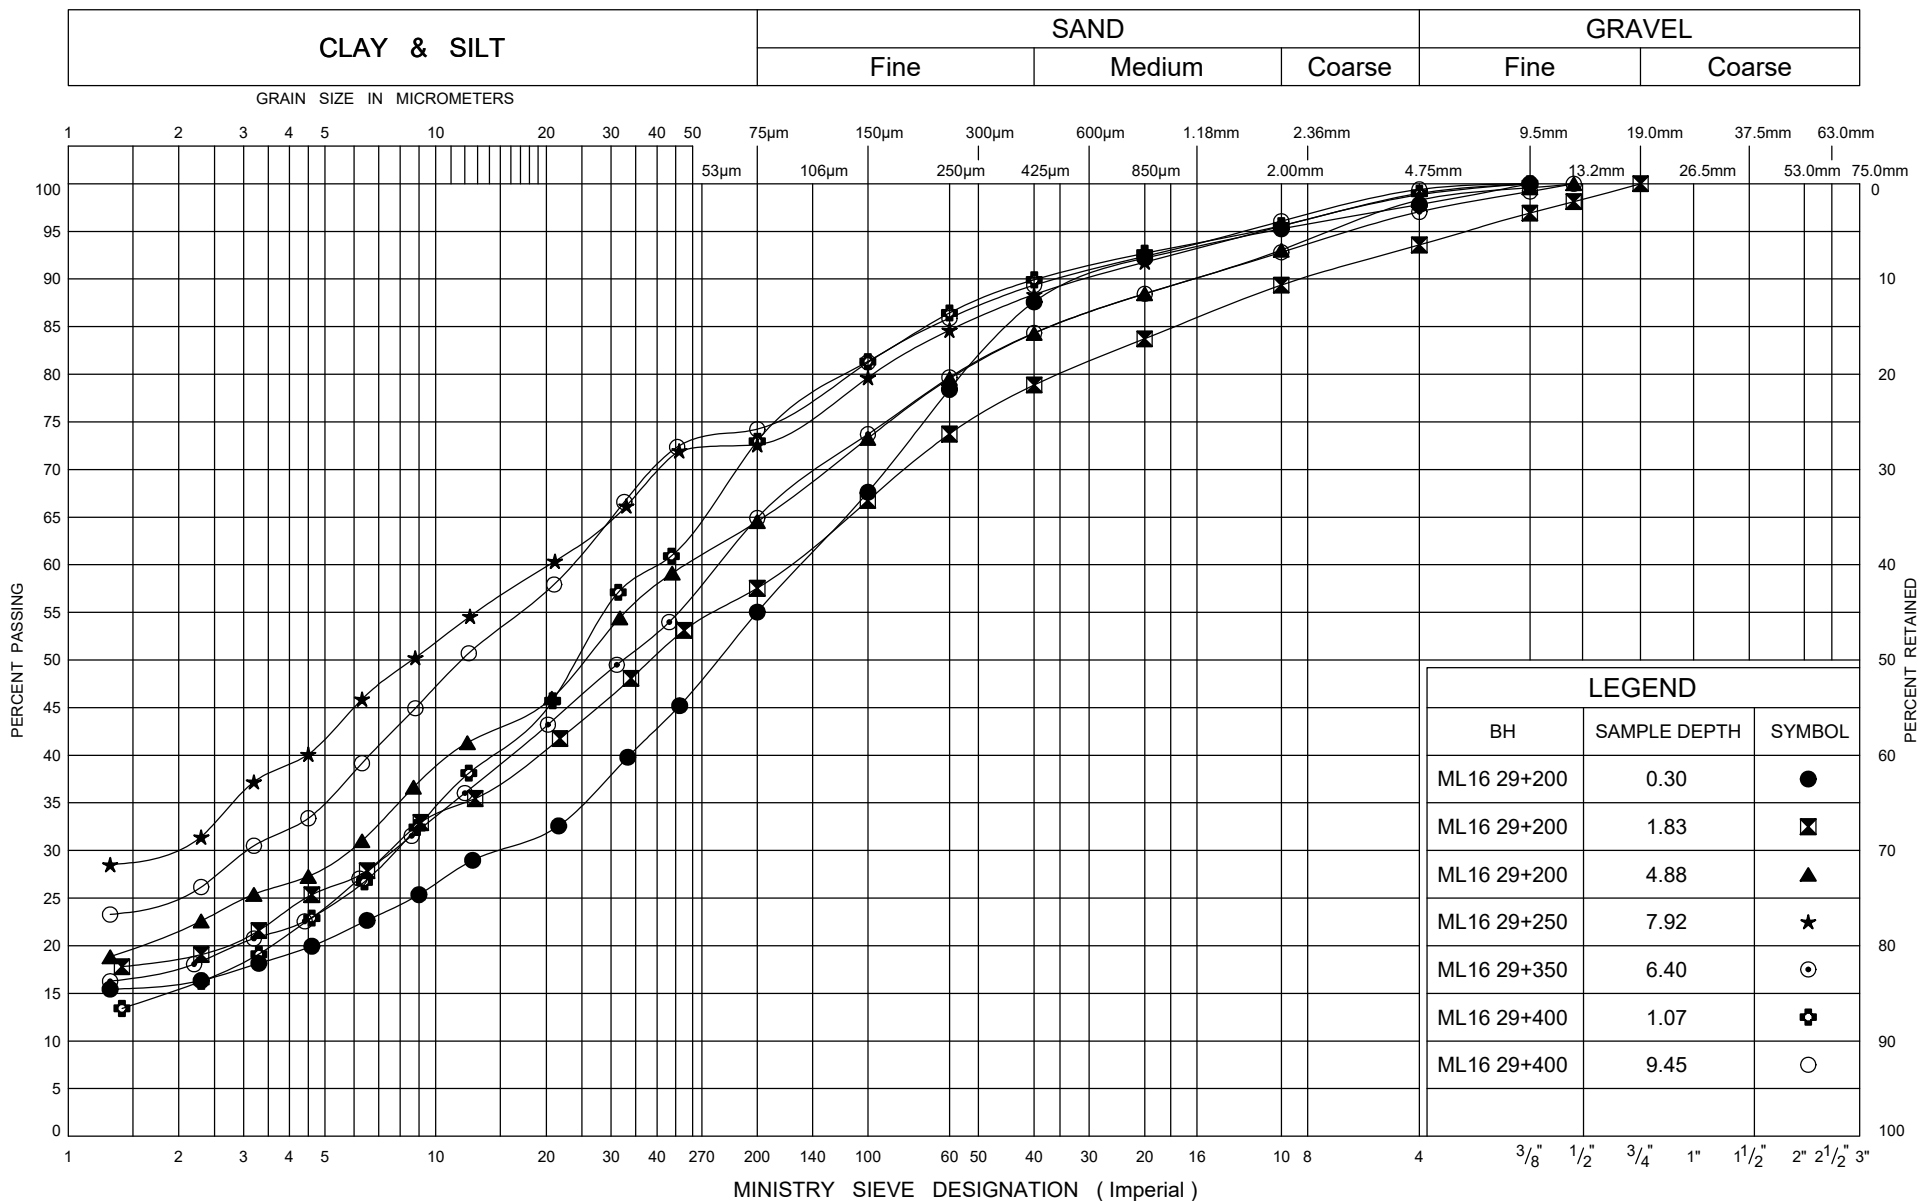

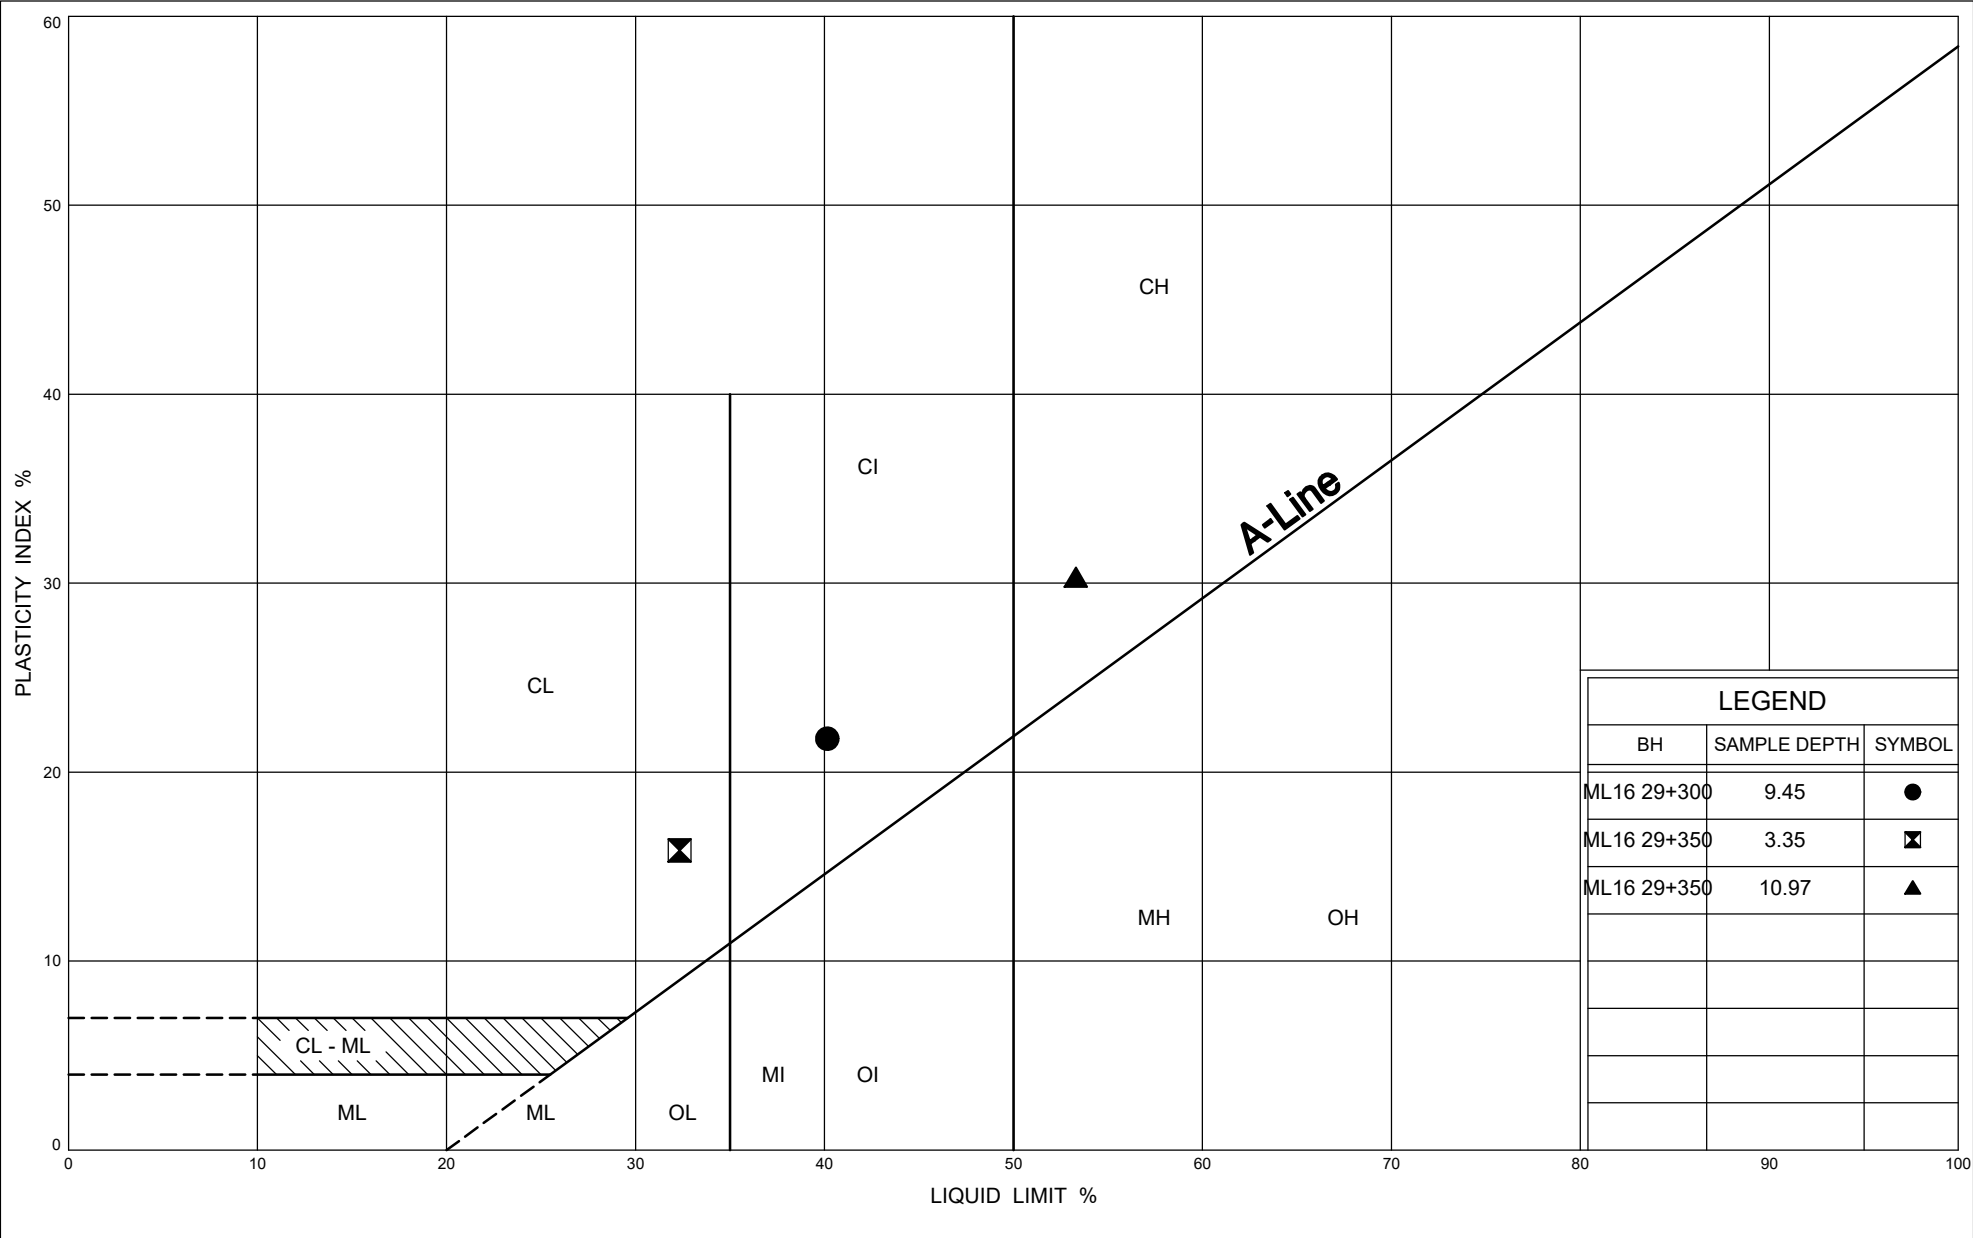

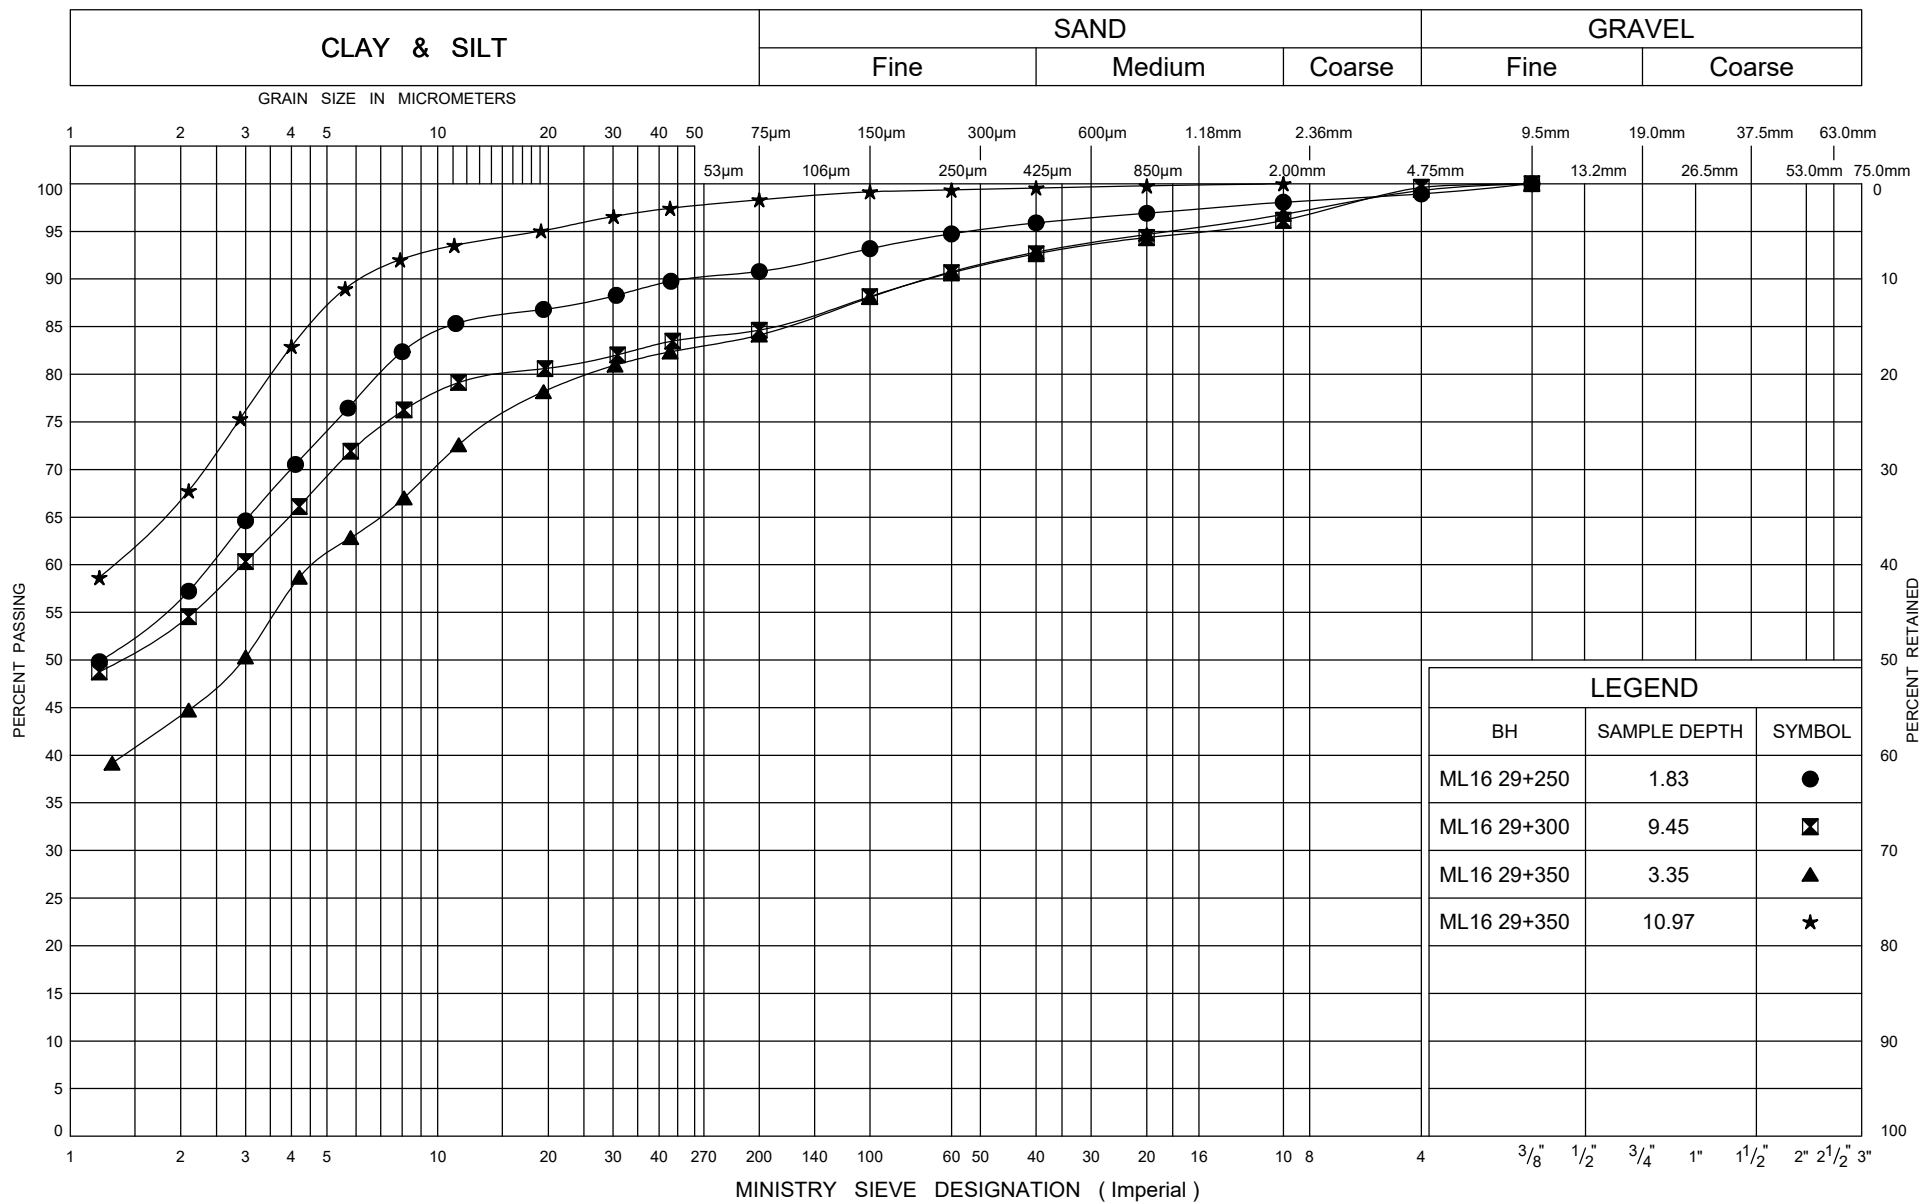




FIG No 15
GWP 408-88-00