



December 12, 2014

FOUNDATION INVESTIGATION REPORT

**HIGHWAY 60 MADAWASKA RIVER BRIDGE SIDEWALK
SITE #43-150, WHITNEY, ONTARIO
MINISTRY OF TRANSPORTATION, ONTARIO
GWP 5198-10-00, WP 5359-11-01**

Submitted to:

LEA Consulting Ltd
625 Cochrane Drive, Suite 900
Markham, Ontario
L3R 9R9



GEOCRES NO.: 31E-341

Report Number: 13-1191-0003-R04

Distribution:

- 1 PDF Copy - Ministry of Transportation, Ontario, North Bay, Ontario (Northeastern Region)
- 1 PDF Copy - Ministry of Transportation, Ontario, Downsview, Ontario (Foundations Section)
- 1 Copy - LEA Consulting Ltd., Markham, Ontario
- 1 PDF Copy - Golder Associates Ltd., Sudbury, Ontario

REPORT





Table of Contents

PART A – FOUNDATION INVESTIGATION REPORT

1.0 INTRODUCTION.....	1
2.0 SITE DESCRIPTION.....	1
3.0 INVESTIGATION PROCEDURES	1
4.0 SITE GEOLOGY AND SUBSURFACE CONDITIONS	2
4.1 Regional Geology	2
4.2 General Overview of Local Subsurface Conditions.....	2
5.0 CLOSURE.....	3

Drawing 1 Borehole Locations and Soil Strata

Drawing 2 Soil Strata

SITE PHOTOGRAPHS

Appendix A Record of Boreholes and Laboratory Test Results

List of Symbols and Abbreviations

Record of Boreholes MA1 to MA4

Figure A1 Grain Size Distribution – Sand to Sand and Gravel (Fill)



PART A

FOUNDATION INVESTIGATION REPORT

HIGHWAY 60 MADAWASKA RIVER BRIDGE SIDEWALK

SITE #43-150, WHITNEY, ONTARIO

MINISTRY OF TRANSPORTATION, ONTARIO

GWP 5198-10-00, WP 5359-11-01



1.0 INTRODUCTION

Golder Associates Ltd. (Golder) has been retained by LEA Consulting Limited (LEA) on behalf of Ministry of Transportation, Ontario (MTO) to provide foundation engineering services for the proposed sidewalk along the south side of the Madawaska River Bridge as part of the rehabilitation of the Bridge on Highway 60, in Whitney, Ontario. The location of the bridge is shown on the Key Plan on Drawing 1.

The Terms of Reference and Scope of Work for the foundation investigation are outlined in MTO's Request for Proposal, dated January 2013. Golder's proposal for foundation engineering services associated with the bridge rehabilitation is contained in Section 6.8 of LEA's Technical Proposal for this assignment. The work has been carried out in accordance with Golder's Supplementary Specialty Plan for foundation engineering services for this project dated May 10, 2013.

The purpose of this investigation is to establish the subsurface conditions for the proposed sidewalk by methods of borehole drilling, in situ testing and laboratory testing on selected soil samples.

2.0 SITE DESCRIPTION

The Madawaska River Bridge is located on the existing Highway 60 alignment in Whitney. The river banks adjacent to the existing bridge are approximately 5 m high and inclined between about 1 Horizontal and 1 Vertical (1H:1V) and 2H:1V, and are vegetated with grass and small shrubs and trees. The river flows to the north east and is about 20 m wide at the existing bridge location. The existing earth-filled reinforced concrete arch structure has a 30.2 m span and was constructed in 1941. The structure is supported on shallow foundations bearing on bedrock. The Madawaska River water level at the bridge was measured at Elevation 386.7 m on July 30, 2013. Photographs taken at the site are included following the text of this report.

3.0 INVESTIGATION PROCEDURES

The fieldwork for the investigation was carried out on September 8 and 9, 2014, during which time a total of four (4) boreholes were advanced at the site. The locations of the boreholes are shown on Drawing 1.

The boreholes were advanced using a CME-55 track-mounted drill rig supplied and operated by George Downing Estate Drilling Ltd. of Grenville-Sur-La-Rouge, Quebec. The boreholes were advanced to depths to refusal using 108 mm inside diameter hollow stem augers. In general, soil samples were obtained at intervals of depth of about 0.75 m and 1.5 m, using a 50 mm outer diameter split-spoon sampler driven by an automatic hammer and performed in accordance with Standard Penetration Test (SPT) procedures (ASTM D1586). The open boreholes were backfilled upon completion in accordance with Ontario Regulation 903 Wells (as amended).

The groundwater conditions in the open boreholes were observed during the drilling operations and are described on the Record of Borehole sheets in Appendix A. Groundwater elevations as encountered in the boreholes may not be representative of static groundwater levels since the groundwater levels in the boreholes may not have stabilized on completion of drilling. Furthermore, groundwater elevations will vary depending on seasonal fluctuations, precipitation and local soil permeability.



The fieldwork was observed by a member of our engineering and technical staff, who located the boreholes, arranged for the clearance of underground services, observed the drilling, sampling and in situ testing operations, logged the boreholes and examined and cared for the soil samples. The soil samples were identified in the field, placed in appropriate containers, labelled and transported to our Sudbury Geotechnical Laboratory where the samples underwent further visual examination and laboratory testing. All of the laboratory tests were carried out to MTO Laboratory Standards and/or ASTM Standards, as appropriate. Classification testing (water content and grain size distribution) was carried out on selected soil samples.

The as-drilled borehole locations and ground surface elevations were referenced to the existing bridge deck and the locations were subsequently converted into MTM NAD 83 coordinates in AutoCAD. The borehole locations given on the Record of Borehole sheets in Appendix A and shown on Drawings 1 are positioned relative to MTM NAD 83 northing and easting coordinates and the ground surface elevations are referenced to Geodetic datum. The borehole locations, ground surface elevations and drilled depths are as follows:

Borehole	MTM NAD 83 Coordinates (m)		Ground Surface Elevation (m)	Borehole Depth m)
	Northing	Easting		
MA1	5 040 127.4	403 340.9	392.9	5.9
MA2	5 040 133.3	403 343.7	392.9	6.8
MA3	5 040 153.4	403 316.4	393.1	6.8
MA4	5 040 157.1	403 320.6	393.1	6.7

4.0 SITE GEOLOGY AND SUBSURFACE CONDITIONS

4.1 Regional Geology

Based on NOEGTS¹ mapping, the subsoils at the bridge site consists of bedrock outcrops separated by organic deposits and glaciofluvial deposits.

Published literature indicates that the bedrock in the area typically consists of migmatic rocks and gneisses within the Central Gneiss Belt, a subdivision of the Grenville Structural Province (OGS, 1991)².

4.2 General Overview of Local Subsurface Conditions

The detailed subsurface soil and groundwater conditions as encountered in the boreholes advanced during this investigation, together with the results of the laboratory tests carried out on selected soil samples, are presented on the Record of Borehole sheets and on Figure A1, respectively, in Appendix A. Stratigraphic profiles of the subsurface conditions along the south (sidewalk) and north (parapet wall) sides of the bridge are presented on Drawings 1 and 2, respectively. The stratigraphic boundaries shown on the Record of Borehole sheets and on Drawings 1 and 2 are inferred from non-continuous sampling, observations of drilling progress and in situ testing. These boundaries, therefore, represent transitions between soil types rather than exact planes of geological change. Further, subsurface conditions will vary between and beyond the borehole locations.

¹ Northern Ontario Engineering Geology Terrain Study. Ontario Geological Society Electronic Mapping.

² Ontario Geological Survey, 1991. Geology of Ontario, Special Volume 4, Part 1. Eds P.C. Thurston, H.R. Williams, R.H. Sutcliffe and G.M. Stott, Ministry of Northern Development and Mines, Ontario.



Detailed descriptions of the subsurface conditions are provided in the following sections.

Embankment Fill

Boreholes MA1 to MA4 were advanced through the existing roadway and encountered a 100 mm thick layer of asphalt with the roadway surface ranging from Elevations 393.1 m to 392.9 m. Below the asphalt, between 5.8 m and 6.7 m of embankment fill consisting of sand to sand and gravel was encountered.

The SPT 'N'-values measured within the fill range between 2 blows and 45 blows per 0.3 m of penetration, indicating a very loose to dense relative density.

The grain size distribution of eight samples of the fill are shown on Figure A1.

The natural water content measured on the samples of the fill is between 2 and 6 per cent.

Refusal

Auger refusal was encountered in each of the boreholes at depths ranging from 5.9 m to 6.8 m below ground surface, corresponding to between Elevations 387.0 m and 386.1 m.

Groundwater Conditions

Borehole MA1 was noted to be dry upon completion of drilling. In Boreholes MA2 to MA4, the water level was measured at depths of 5.9 m and 6.0 m below ground surface upon completion of drilling corresponding to between Elevations 387.2 m and 386.9 m. The river water level measured in July 2013 is Elevation 386.7 m. Groundwater levels in the area are subject to seasonal fluctuations and variations due to precipitation events and the adjacent river water level.

5.0 CLOSURE

The drilling program was supervised by Matt Thibeault and this report was prepared by Tibor Berecz. The technical aspects were reviewed by André Bom, P.Eng., and Jorge M. A. Costa, P.Eng., Principal and Golder's Designated MTO Contact for this project, carried out a quality control review of the report.




Report Signature Page

GOLDER ASSOCIATES LTD.

Tibor Berecz

Tibor Berecz, M.Sc. Eng. (Hungary)

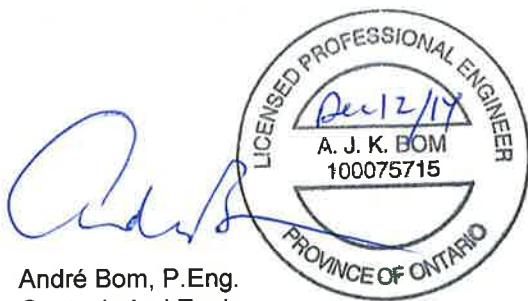

André Bom, P.Eng.
Geotechnical Engineer





Jorge M.A. Costa, P.Eng.
Designated MTO Contact

AB/JMAC/kp


Golder, Golder Associates and the GA globe design are trademarks of Golder Associates Corporation.

n:\active\2013\1190 sudbury\1191\13-1191-0003 - lea hwy 60-35-118\1191 - foundations\reporting\r04 - madawaska\final\13-1191-0003 rpt04 14dec12 dft hwy 60 fdr madawaska.docx

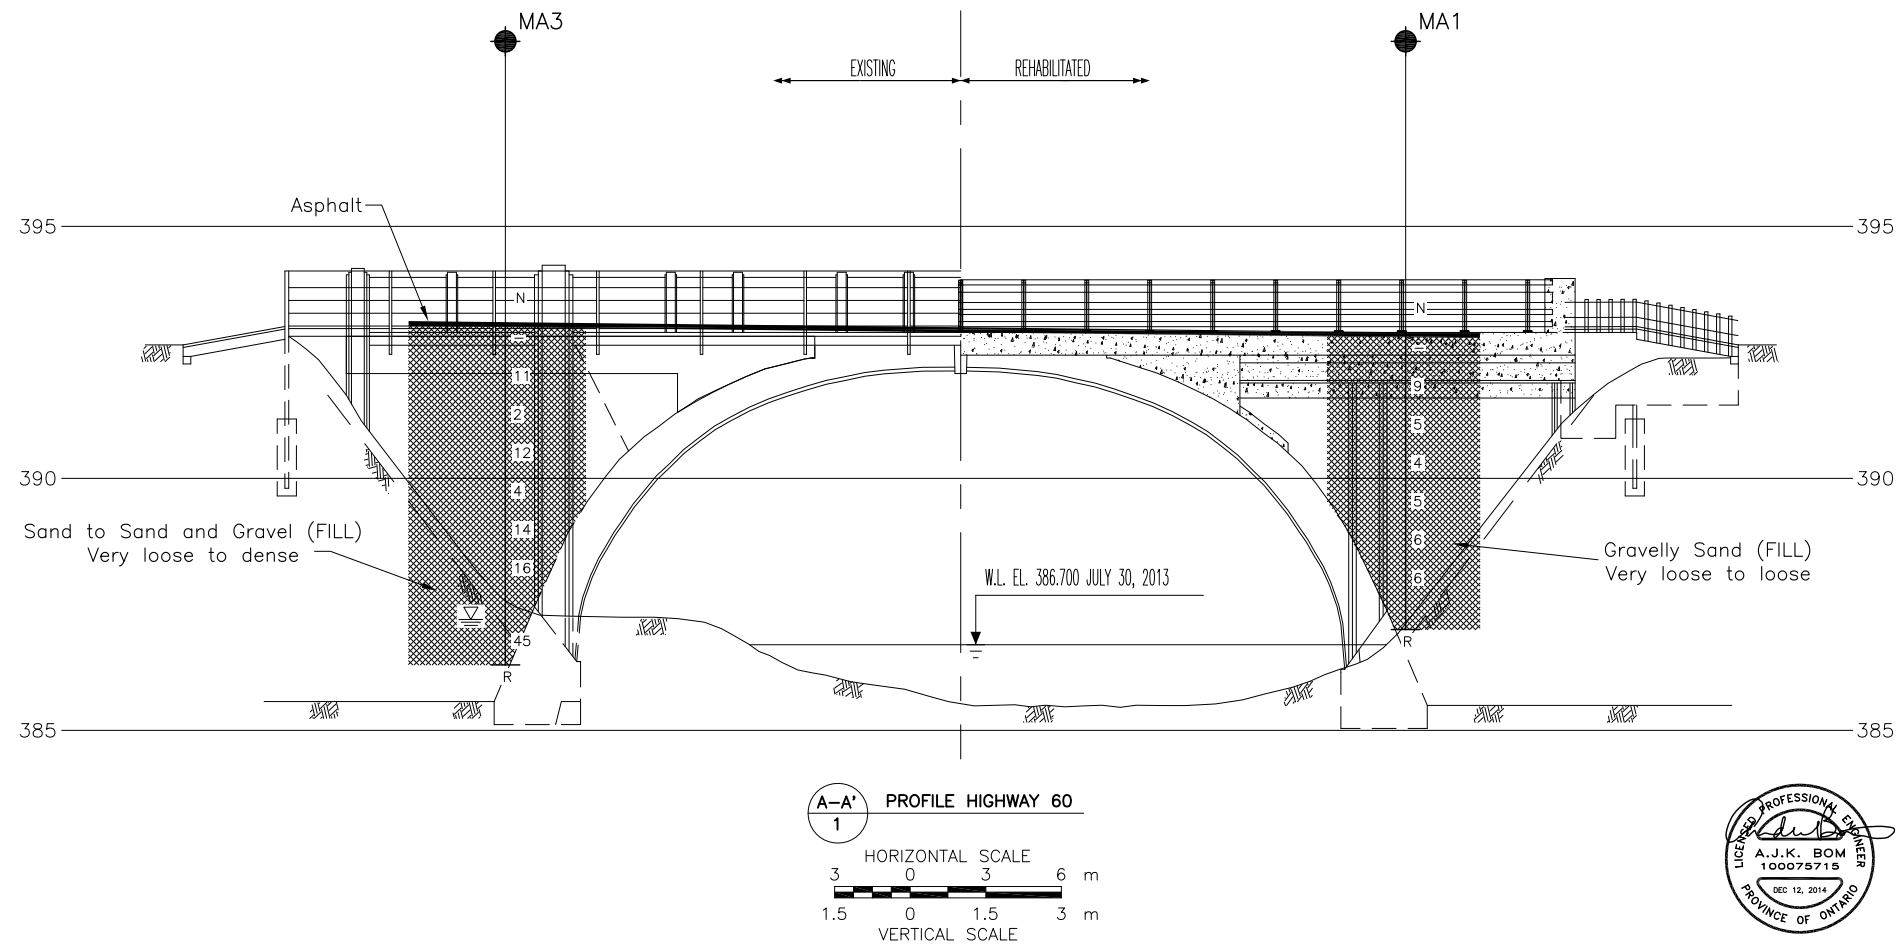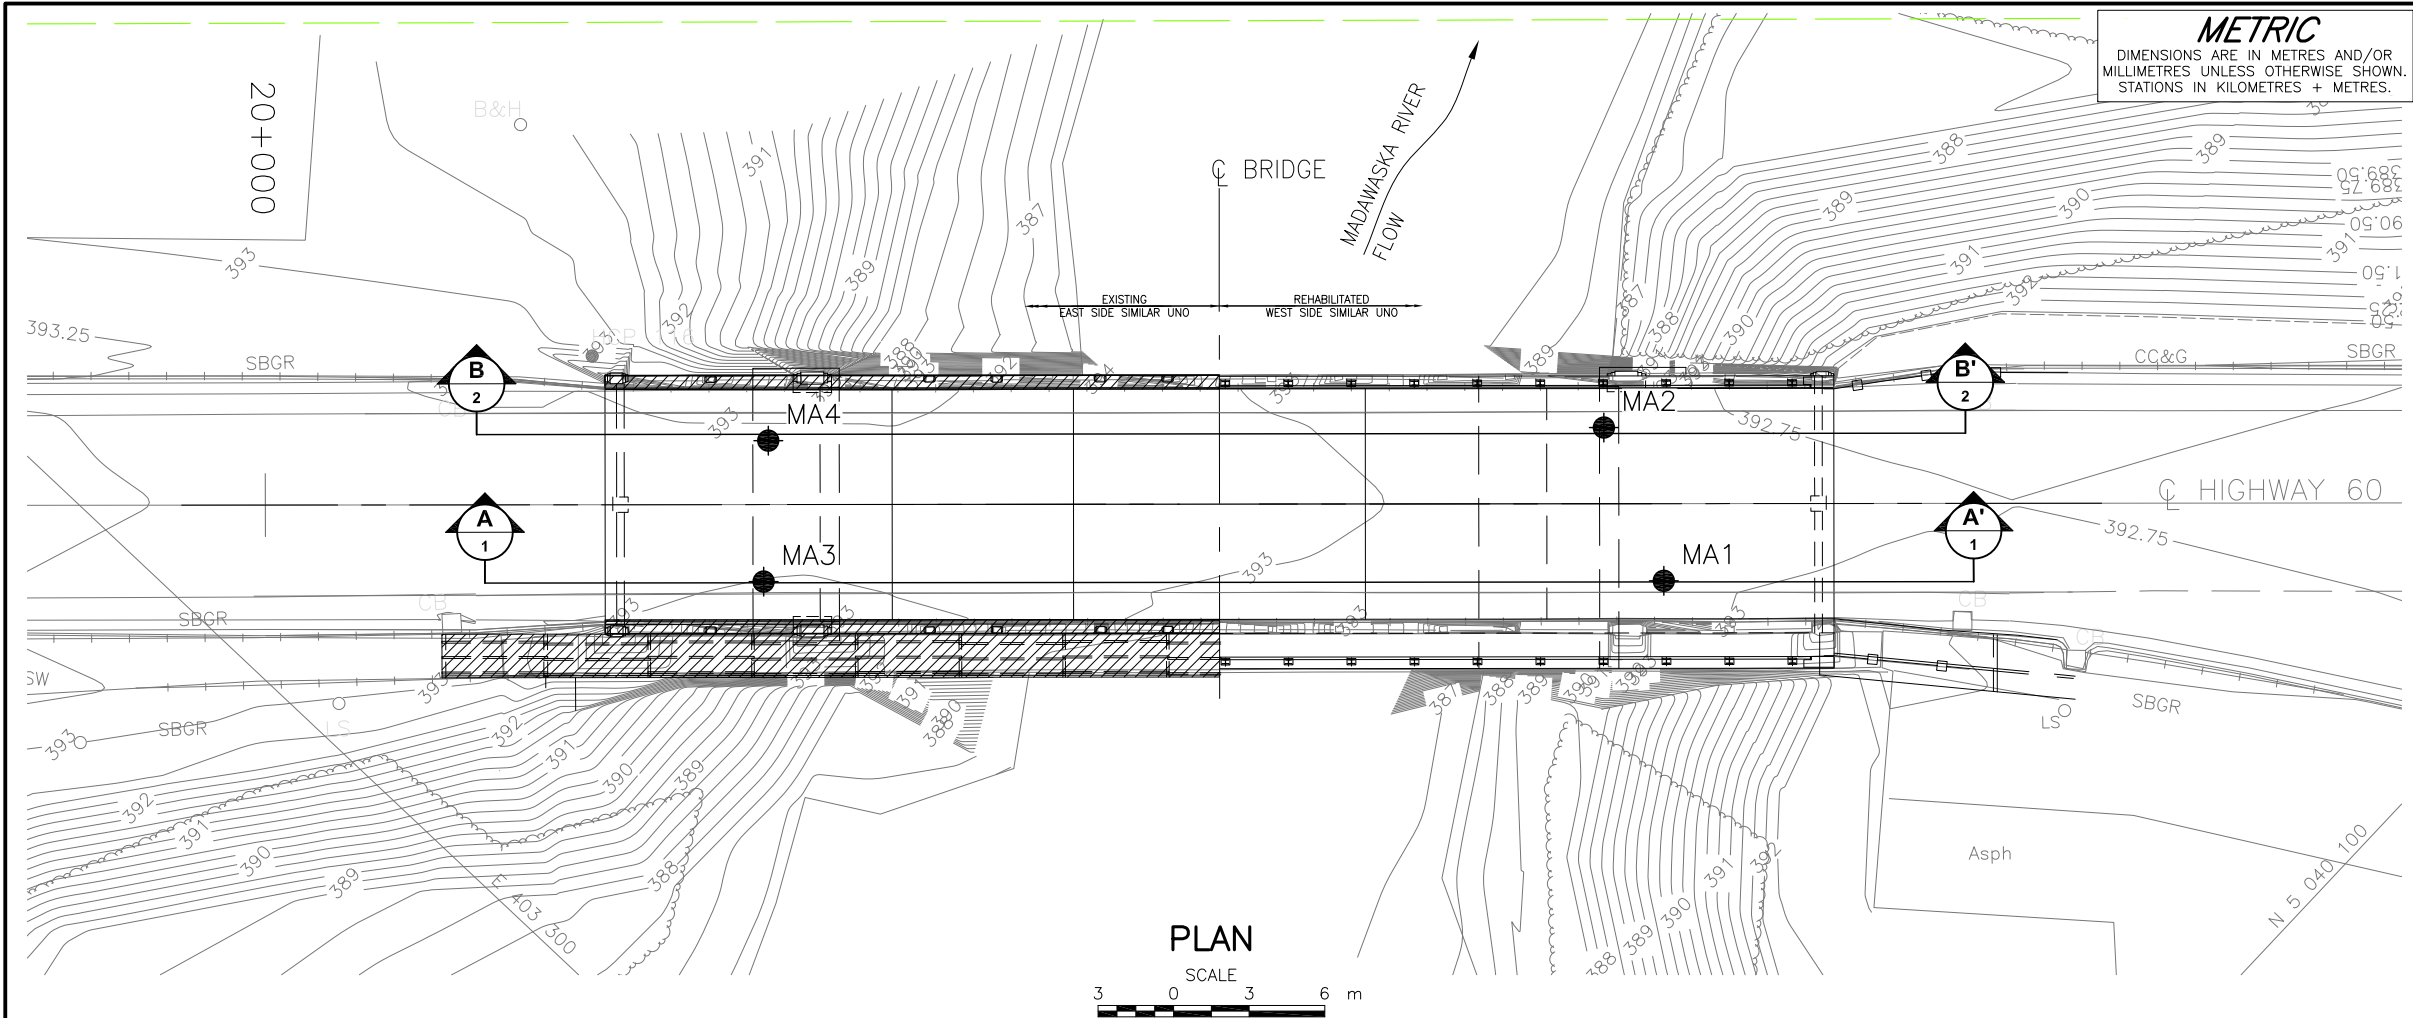

CONT No.
WP No. 5359-11-01

HIGHWAY 60
MADAWASKA RIVER BRIDGE SIDEWALK
BOREHOLE LOCATIONS AND SOIL STRATA



SHEET



Golder Associates Ltd.
SUDBURY, ONTARIO, CANADA



KEY PLAN
12 0 12 km

LEGEND

- Borehole
- N Standard Penetration Test Value
- 16 Blows/0.3m unless otherwise stated (Std. Pen. Test, 475 j/blow)
- WL upon completion of drilling
- R Refusal

BOREHOLE CO-ORDINATES

No.	ELEVATION	NORTHING	EASTING
MA1	392.9	5040127.4	403340.9
MA2	392.9	5040133.3	403343.7
MA3	393.1	5040153.4	403316.4
MA4	393.1	5040157.1	403320.6

NOTES

This drawing is for subsurface information only. The proposed structure details/works are shown for illustration purposes only and may not be consistent with the final design configuration as shown elsewhere in the Contracts Documents.

The boundaries between soil strata have been established only at borehole locations. Between boreholes the boundaries are assumed from geological evidence.

The complete Foundation Investigation and Design Report for this project and other related documents may be examined at the Materials Engineering and Research Office, Downsview. Information contained in this report and related documents is specifically excluded in accordance with Section GC 2.01 of OPS General Conditions.

REFERENCE

Base plans provided in digital format by LEA, drawing file nos. x9255_Madawaska_base.dwg, x9255_Madawaska_contour.dwg and 9255-madawaska-S01.dwg, received SEP 8, 2014.



NO.	DATE	BY	REVISION
Geocres No. 31E-341			
HWY. 60	PROJECT NO. 13-1191-0003	DIST.	
SUBM'D. AB	CHKD.	DATE: DEC 2014	SITE: 43-150
DRAWN: TB	CHKD. AB	APPD. JMAC	DWG. 1

METRIC
DIMENSIONS ARE IN METRES AND/OR
MILLIMETRES UNLESS OTHERWISE SHOWN.
STATIONS IN KILOMETRES + METRES.

CONT No.
WP No. 5359-11-01

HIGHWAY 60
MADAWASKA RIVER BRIDGE SIDEWALK
SOIL STRATA

SHEET



Golder Associates Ltd.
SUDBURY, ONTARIO, CANADA

LEGEND

- Borehole
- N Standard Penetration Test Value
- 16 Blows/0.3m unless otherwise stated
(Std. Pen. Test, 475 j/blow)
- ≡ WL upon completion of drilling
- R Refusal

BOREHOLE CO-ORDINATES

No.	ELEVATION	NORTHING	EASTING
MA1	392.9	5040127.4	403340.9
MA2	392.9	5040133.3	403343.7
MA3	393.1	5040153.4	403316.4
MA4	393.1	5040157.1	403320.6

NOTES


This drawing is for subsurface information only. The proposed structure details/works are shown for illustration purposes only and may not be consistent with the final design configuration as shown elsewhere in the Contracts Documents.

The boundaries between soil strata have been established only at borehole locations. Between boreholes the boundaries are assumed from geological evidence.

The complete Foundation Investigation and Design Report for this project and other related documents may be examined at the Materials Engineering and Research Office, Downsview. Information contained in this report and related documents is specifically excluded in accordance with Section GC 2.01 of OPS General Conditions.

REFERENCE

Base plans provided in digital format by LEA, drawing file nos. x9255 Madawaska base.dwg, x9255 Madawaska contour.dwg and 9255-madawaska-S01.dwg, received SEP 8, 2014.

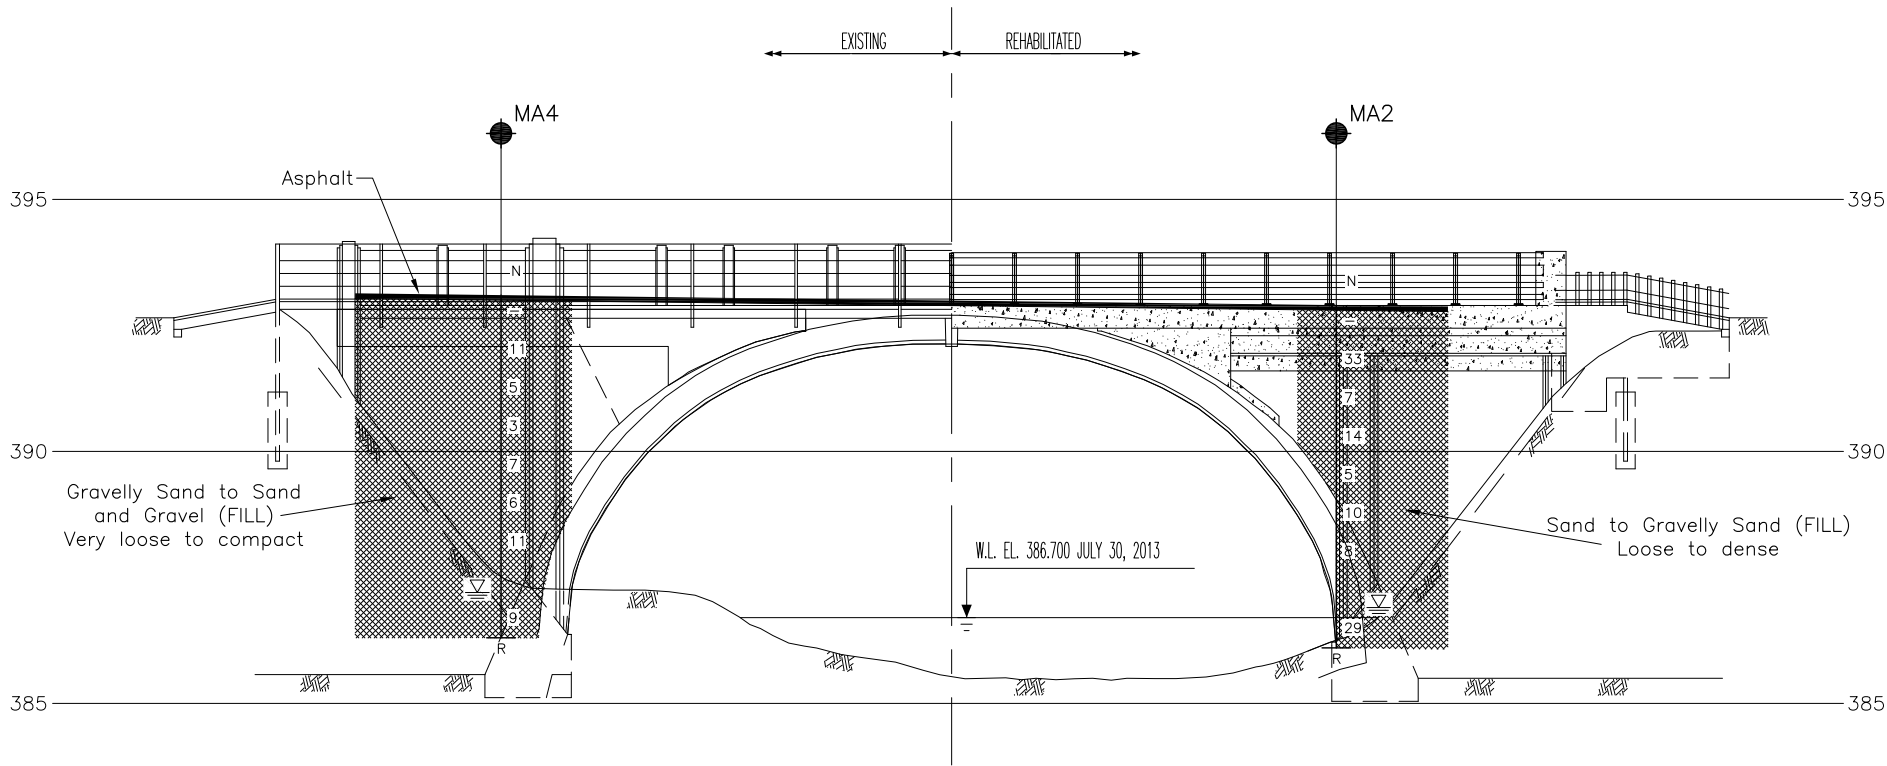

B-B' 1
PROFILE HIGHWAY 60
HORIZONTAL SCALE
3 0 3 6 m
VERTICAL SCALE
1.5 0 1.5 3 m



NO.	DATE	BY	REVISION
Geocres No. 31E-341			
HWY. 60	PROJECT NO. 13-1191-0003		DIST.
SUBM'D. AB	CHKD.	DATE: DEC 2014	SITE: 43-150
DRAWN: TB	CHKD. AB	APPD. JMAC	DWG. 2



SITE PHOTOGRAPHS

Photograph 1: Looking West from East Side Of Bridge (April 2014)



Photograph 2: Looking East on Bridge (September 2014)





APPENDIX A

Record of Borehole and Laboratory Test Results



LIST OF SYMBOLS

Unless otherwise stated, the symbols employed in the report are as follows:

I. GENERAL

π	3.1416
$\ln x$,	natural logarithm of x
\log_{10}	x or log x, logarithm of x to base 10
g	acceleration due to gravity
t	time
FoS	factor of safety

II. STRESS AND STRAIN

γ	shear strain
Δ	change in, e.g. in stress: $\Delta \sigma$
ε	linear strain
ε_v	volumetric strain
η	coefficient of viscosity
ν	Poisson's ratio
σ	total stress
σ'	effective stress ($\sigma' = \sigma - u$)
σ'_{vo}	initial effective overburden stress
$\sigma_1, \sigma_2, \sigma_3$	principal stress (major, intermediate, minor)
σ_{oct}	mean stress or octahedral stress $= (\sigma_1 + \sigma_2 + \sigma_3)/3$
τ	shear stress
u	porewater pressure
E	modulus of deformation
G	shear modulus of deformation
K	bulk modulus of compressibility

III. SOIL PROPERTIES

(a)	Index Properties
$\rho(\gamma)$	bulk density (bulk unit weight)*
$\rho_d(\gamma_d)$	dry density (dry unit weight)
$\rho_w(\gamma_w)$	density (unit weight) of water
$\rho_s(\gamma_s)$	density (unit weight) of solid particles
γ'	unit weight of submerged soil ($\gamma' = \gamma - \gamma_w$)
D_R	relative density (specific gravity) of solid particles ($D_R = \rho_s / \rho_w$) (formerly G_s)
e	void ratio
n	porosity
S	degree of saturation

(a) Index Properties (continued)

w	water content
w_l or LL	liquid limit
w_p or PL	plastic limit
I_p or PI	plasticity index = $(w_l - w_p)$
w_s	shrinkage limit
I_L	liquidity index = $(w - w_p) / I_p$
I_C	consistency index = $(w_l - w) / I_p$
e_{max}	void ratio in loosest state
e_{min}	void ratio in densest state
I_D	density index = $(e_{max} - e) / (e_{max} - e_{min})$ (formerly relative density)

(b) Hydraulic Properties

h	hydraulic head or potential
q	rate of flow
v	velocity of flow
i	hydraulic gradient
k	hydraulic conductivity (coefficient of permeability)
j	seepage force per unit volume

(c) Consolidation (one-dimensional)

C_c	compression index (normally consolidated range)
C_r	recompression index (over-consolidated range)
C_s	swelling index
C_α	secondary compression index
m_v	coefficient of volume change
C_v	coefficient of consolidation (vertical direction)
C_h	coefficient of consolidation (horizontal direction)
T_v	time factor (vertical direction)
U	degree of consolidation
σ'_p	pre-consolidation stress
OCR	over-consolidation ratio = σ'_p / σ'_{vo}

(d) Shear Strength

τ_p, τ_r	peak and residual shear strength
ϕ'	effective angle of internal friction
δ	angle of interface friction
μ	coefficient of friction = $\tan \delta$
c'	effective cohesion
c_u, s_u	undrained shear strength ($\phi = 0$ analysis)
p	mean total stress $(\sigma_1 + \sigma_3)/2$
p'	mean effective stress $(\sigma'_1 + \sigma'_3)/2$
q	$(\sigma_1 - \sigma_3)/2$ or $(\sigma'_1 - \sigma'_3)/2$
q_u	compressive strength $(\sigma_1 - \sigma_3)$
S_t	sensitivity

* Density symbol is ρ . Unit weight symbol is γ where $\gamma = \rho g$ (i.e. mass density multiplied by acceleration due to gravity)

Notes: 1
2

$$\tau = c' + \sigma' \tan \phi'$$
$$\text{shear strength} = (\text{compressive strength})/2$$



LIST OF ABBREVIATIONS

The abbreviations commonly employed on Records of Boreholes, on figures and in the text of the report are as follows:

I. SAMPLE TYPE

AS	Auger sample
BS	Block sample
CS	Chunk sample
DS	Denison type sample
FS	Foil sample
RC	Rock core
SC	Soil core
SS	Split-spoon
ST	Slotted tube
TO	Thin-walled, open
TP	Thin-walled, piston
WS	Wash sample

II. PENETRATION RESISTANCE

Standard Penetration Resistance (SPT), N:

The number of blows by a 63.5 kg. (140 lb.) hammer dropped 760 mm (30 in.) required to drive a 50 mm (2 in.) drive open sampler for a distance of 300 mm (12 in.)

Dynamic Cone Penetration Resistance; N_d :

The number of blows by a 63.5 kg (140 lb.) hammer dropped 760 mm (30 in.) to drive uncased a 50 mm (2 in.) diameter, 60° cone attached to "A" size drill rods for a distance of 300 mm (12 in.).

PH: Sampler advanced by hydraulic pressure

PM: Sampler advanced by manual pressure

WH: Sampler advanced by static weight of hammer

WR: Sampler advanced by weight of sampler and rod

Piezo-Cone Penetration Test (CPT)

A electronic cone penetrometer with a 60° conical tip and a project end area of 10 cm² pushed through ground at a penetration rate of 2 cm/s. Measurements of tip resistance (Q_t), porewater pressure (PWP) and friction along a sleeve are recorded electronically at 25 mm penetration intervals.

III. SOIL DESCRIPTION

(a) Non-Cohesive (Cohesionless) Soils

Density Index	N
Relative Density	Blows/300 mm or Blows/ft
Very loose	0 to 4
Loose	4 to 10
Compact	10 to 30
Dense	30 to 50
Very dense	over 50

(b) Cohesive Soils Consistency

	C_u, S_u	
	kPa	psf
Very soft	0 to 12	0 to 250
Soft	12 to 25	250 to 500
Firm	25 to 50	500 to 1,000
Stiff	50 to 100	1,000 to 2,000
Very stiff	100 to 200	2,000 to 4,000
Hard	over 200	over 4,000

IV. SOIL TESTS

w	water content
w_p	plastic limit
w_l	liquid limit
C	consolidation (oedometer) test
CHEM	chemical analysis (refer to text)
CID	consolidated isotropically drained triaxial test ¹
CIU	consolidated isotropically undrained triaxial test with porewater pressure measurement ¹
D_R	relative density (specific gravity, G_s)
DS	direct shear test
M	sieve analysis for particle size
MH	combined sieve and hydrometer (H) analysis
MPC	Modified Proctor compaction test
SPC	Standard Proctor compaction test
OC	organic content test
SO_4	concentration of water-soluble sulphates
UC	unconfined compression test
UU	unconsolidated undrained triaxial test
V	field vane (LV-laboratory vane test)
γ	unit weight

Note: 1 Tests which are anisotropically consolidated prior to shear are shown as CAD, CAU.

V. MINOR SOIL CONSTITUENTS

Per cent by Weight	Modifier	Example
0 to 5	Trace	Trace sand
5 to 12	Trace to Some (or Little)	Trace to some sand
12 to 20	Some	Some sand
20 to 30	(ey) or (y)	Sandy
over 30	And (non-cohesive (cohesionless)) or With (cohesive)	Sand and Gravel Silty Clay with sand / Clayey Silt with sand

PROJECT 13-1191-0003			RECORD OF BOREHOLE No MA1			1 OF 1 METRIC											
G.W.P. 5198-10-00			LOCATION N 5040127.4; E 403340.9			ORIGINATED BY MT											
DIST _____ HWY 60			BOREHOLE TYPE 108 mm I.D. Continuous Flight Hollow Stem Augers			COMPILED BY TB											
DATUM GEODETIC			DATE September 8, 2014			CHECKED BY AB											
SOIL PROFILE			SAMPLES			DYNAMIC CONE PENETRATION RESISTANCE PLOT			PLASTIC LIMIT NATURAL MOISTURE CONTENT LIQUID LIMIT			UNIT WEIGHT			REMARKS & GRAIN SIZE DISTRIBUTION (%)		
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES	GROUND WATER CONDITIONS	ELEVATION SCALE	SHEAR STRENGTH kPa ○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL × REMOULDED					W _p W W _L WATER CONTENT (%)			γ	GR SA SI CL
392.9	GROUND SURFACE							20 40 60 80 100									
0.0	ASPHALT (100 mm)		1	AS	-		392										
	Gravelly sand, some silt (FILL)		2	SS	9												
	Very loose to loose		3	SS	5		391									26 65 (9)	
	Brown		4	SS	4		390										
	Moist		5	SS	5												
			6	SS	6		389									21 73 (6)	
			7	SS	6		388										
387.0	END OF BOREHOLE AUGER REFUSAL						387										
5.9	Note: 1. Borehole dry upon completion of drilling.																

SUD-MTO 001 13-1191-0003.GPJ GAL-MISS.GDT 31/10/14 DATA INPUT:


PROJECT 13-1191-0003			RECORD OF BOREHOLE No MA2			1 OF 1 METRIC											
G.W.P. 5198-10-00			LOCATION N 5040133.3; E 403343.7			ORIGINATED BY MT											
DIST _____ HWY 60			BOREHOLE TYPE 108 mm I.D. Continuous Flight Hollow Stem Augers			COMPILED BY TB											
DATUM GEODETIC			DATE September 9, 2014			CHECKED BY AB											
SOIL PROFILE			SAMPLES			DYNAMIC CONE PENETRATION RESISTANCE PLOT			PLASTIC LIMIT NATURAL MOISTURE CONTENT LIQUID LIMIT			UNIT WEIGHT			REMARKS & GRAIN SIZE DISTRIBUTION (%)		
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES	GROUND WATER CONDITIONS	ELEVATION SCALE	SHEAR STRENGTH kPa ○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL × REMOULDED					WATER CONTENT (%) W _p W W _L			γ	GR SA SI CL
392.9	GROUND SURFACE							20 40 60 80 100									
0.0	ASPHALT (100 mm)		1	AS	-		392										
	Sand, some gravel to gravelly sand, some silt (FILL)		2	SS	33												
	Loose to dense		3	SS	7		391									20 65 (15)	
	Brown		4	SS	14		390										
	Moist		5	SS	5												
			6	SS	10		389										
			7	SS	8		388										
							387										
			8	SS	39/0.2												
	Wet (Sample 8)																
386.1	END OF BOREHOLE AUGER REFUSAL																
6.8	Note: 1. Water level at a depth of 6.0 m below ground surface (Elev. 386.9 m) upon completion of drilling.																

PROJECT 13-1191-0003			RECORD OF BOREHOLE No MA3			1 OF 1 METRIC											
G.W.P. 5198-10-00			LOCATION N 5040153.4; E 403316.4			ORIGINATED BY MT											
DIST _____ HWY 60			BOREHOLE TYPE 108 mm I.D. Continuous Flight Hollow Stem Augers			COMPILED BY TB											
DATUM GEODETIC			DATE September 8, 2014			CHECKED BY AB											
SOIL PROFILE			SAMPLES			DYNAMIC CONE PENETRATION RESISTANCE PLOT			PLASTIC LIMIT NATURAL MOISTURE CONTENT LIQUID LIMIT			UNIT WEIGHT			REMARKS & GRAIN SIZE DISTRIBUTION (%)		
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES	GROUND WATER CONDITIONS	ELEVATION SCALE	SHEAR STRENGTH kPa ○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL × REMOULDED					WATER CONTENT (%) W _p W W _L			γ	GR SA SI CL
393.1	GROUND SURFACE							20 40 60 80 100									
0.0	ASPHALT (100 mm)		1	AS	-		393										
	Sand, some gravel to sand and gravel, trace silt (FILL)		2	SS	11		392										
	Very loose to dense		3	SS	2		391									15 82 (3)	
	Brown		4	SS	12		390										
	Moist		5	SS	4		389										
			6	SS	14		388									34 61 (5)	
			7	SS	16		387										
			8	SS	45												
386.3	END OF BOREHOLE AUGER REFUSAL																
6.8	Note: 1. Water level at a depth of 5.9 m below ground surface (Elev. 387.2 m) upon completion of drilling.																

SUD-MTO 001 13-1191-0003.GPJ GAL-MISS.GDT 31/10/14 DATA INPUT:

PROJECT 13-1191-0003			RECORD OF BOREHOLE No MA4			1 OF 1 METRIC											
G.W.P. 5198-10-00			LOCATION N 5040157.1; E 403320.6			ORIGINATED BY MT											
DIST _____ HWY 60			BOREHOLE TYPE 108 mm I.D. Continuous Flight Hollow Stem Augers			COMPILED BY TB											
DATUM GEODETIC			DATE September 8, 2014			CHECKED BY AB											
SOIL PROFILE			SAMPLES			DYNAMIC CONE PENETRATION RESISTANCE PLOT			PLASTIC LIMIT NATURAL MOISTURE CONTENT LIQUID LIMIT			UNIT WEIGHT			REMARKS & GRAIN SIZE DISTRIBUTION (%)		
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES	GROUND WATER CONDITIONS	ELEVATION SCALE	SHEAR STRENGTH kPa					WATER CONTENT (%)			γ kN/m³	GR SA SI CL
							20 40 60 80 100	○ UNCONFINED + FIELD VANE	● QUICK TRIAXIAL × REMOULDED	Wp	W	WL	20 40 60				
393.1	GROUND SURFACE																
0.0	ASPHALT (100 mm)																
	Gravelly sand to sand and gravel, some silt (FILL) Very loose to compact Brown Moist		1	AS	-		393										
			2	SS	11		392										
			3	SS	5		391										24 72 (4)
			4	SS	3		390										
			5	SS	7		389										
			6	SS	6		388										
			7	SS	11		387										
			8	SS	9/0.2												32 64 (4)
386.4	Wet (Sample 8)																
6.7	END OF BOREHOLE AUGER REFUSAL																
	Note: 1. Water level at a depth of 5.9 m below ground surface (Elev. 387.2 m) inside casing.																

SUD-MTO 001 13-1191-0003.GPJ GAL-MISS.GDT 31/10/14 DATA INPUT:

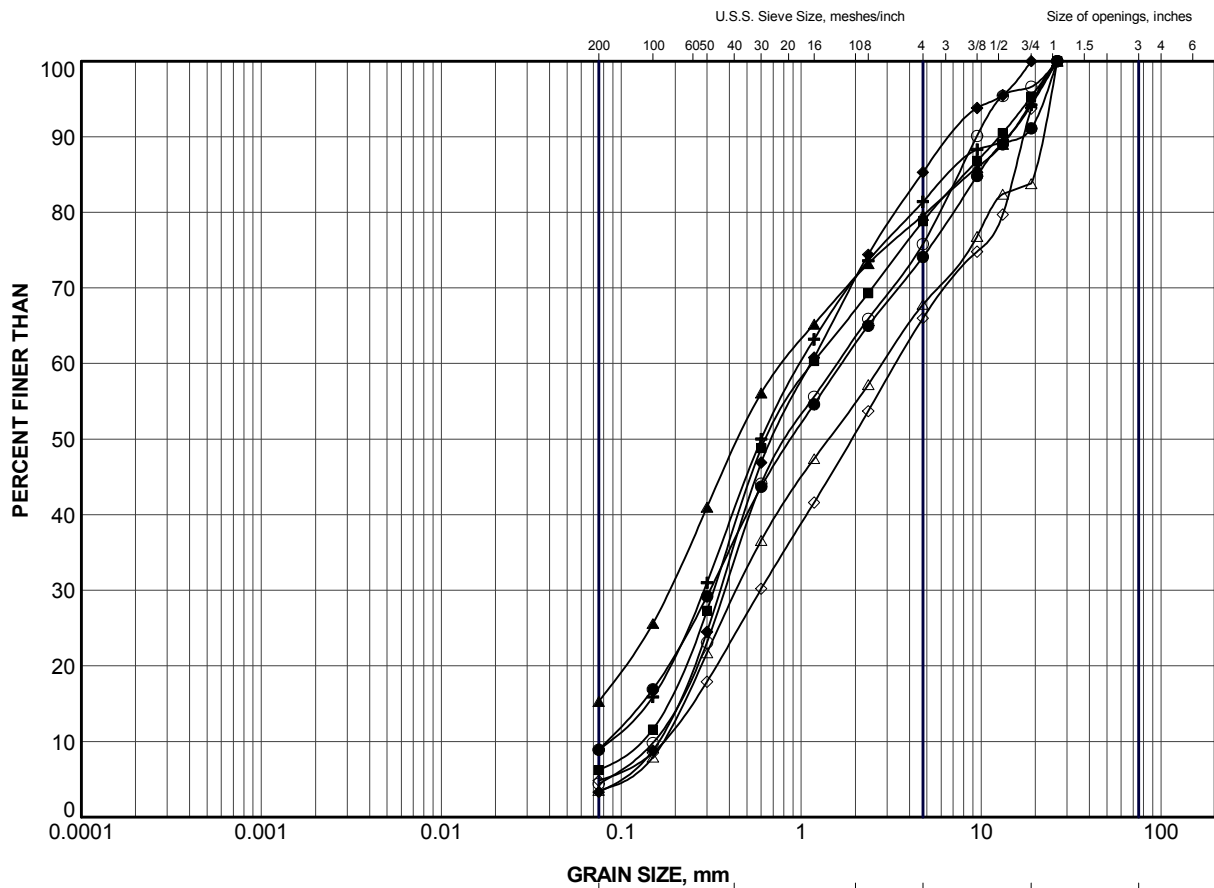

CLAY AND SILT	GRAVEL SIZE, mm					Cobble Size
	fine	medium	coarse	fine	coarse	
	SAND SIZE			GRAVEL SIZE		

LEGEND

SYMBOL	BOREHOLE	SAMPLE	ELEV (m)
●	MA1	3	391.1
■	MA1	6	388.8
▲	MA2	3	391.1
+	MA2	5	389.6
◆	MA3	3	391.3
◇	MA3	7	388.2
○	MA4	3	391.3
△	MA4	6	389.0

PROJECT

HIGHWAY 60
MADAWASKA RIVER BRIDGE

TITLE

GRAIN SIZE DISTRIBUTION

SAND to SAND and GRAVEL (FILL)



PROJECT No. 13-1191-0003		FILE No. 13-1191-0003.GPJ	
DRAWN	TB	Oct 2014	SCALE N/A
CHECK	AB	Oct 2014	REV.
APPR		Oct 2014	

FIGURE A1

At Golder Associates we strive to be the most respected global company providing consulting, design, and construction services in earth, environment, and related areas of energy. Employee owned since our formation in 1960, our focus, unique culture and operating environment offer opportunities and the freedom to excel, which attracts the leading specialists in our fields. Golder professionals take the time to build an understanding of client needs and of the specific environments in which they operate. We continue to expand our technical capabilities and have experienced steady growth with employees who operate from offices located throughout Africa, Asia, Australasia, Europe, North America, and South America.

Africa	+ 27 11 254 4800
Asia	+ 86 21 6258 5522
Australasia	+ 61 3 8862 3500
Europe	+ 356 21 42 30 20
North America	+ 1 800 275 3281
South America	+ 55 21 3095 9500

solutions@golder.com
www.golder.com

Golder Associates Ltd.
1010 Lorne Street
Sudbury, Ontario, P3C 4R9
Canada
T: +1 (705) 524 6861

