

**FOUNDATION INVESTIGATION REPORT
HIGH MAST LIGHTING POLES
HIGHWAY 400
MAJOR MACKENZIE DRIVE TO NORTH OF TESTON ROAD
TORONTO, ONTARIO
G.W.P. 2539-04-00**

GEOCRES No. 30M13-164

Submitted

To

**SNC-Lavalin
Engineers & Constructors**

Thurber Engineering Ltd.
Suite 103, 2010 Winston Park Drive
Oakville, Ontario
L6H 5R7
Tel. (905) 829-8666
Fax. (905) 829-1166
April 1, 2010
File: 19-92-68
h:\19\92\68 Hwy 400 Widening\Reports & Memos\199268 HML Poles FIR FINAL apr 10.doc

TABLE OF CONTENTS

SECTION	PAGE
PART 1 FACTUAL INFORMATION	
1.0 INTRODUCTION	1
2.0 SITE DESCRIPTION.....	2
3.0 INVESTIGATION PROCEDURES	3
3.1 Field Investigation.....	3
3.2 Laboratory Testing	4
4.0 SUBSURFACE STRATIGRAPHY	4
4.1 General	4
4.2 Pavement Structure	5
4.3 Embankment Fill	5
4.4 Silty Clay.....	6
4.5 Silty Clay Till.....	7
4.6 Sand, Silty Sand to Sandy Silt.....	8
4.7 Groundwater Conditions	8
5.0 Miscellaneous	9

DRAWINGS

Drawings 1 and 2 Borehole Locations and Strata Drawings

APPENDICES

- | | |
|------------|--|
| Appendix A | Records of Boreholes (Present Investigation) |
| Appendix B | Geotechnical Laboratory Test Results (Present Investigation) |
| Appendix C | Records of Boreholes (Previous Investigations) |



**FOUNDATION INVESTIGATION REPORT
HIGH MAST LIGHTING POLES
HIGHWAY 400
MAJOR MACKENZIE DRIVE TO NORTH OF TESTON ROAD
TORONTO, ONTARIO
G.W.P. 2539-04-00**

GEOCRES No. 30M13-164

PART 1 FACTUAL INFORMATION

1.0 INTRODUCTION

This report presents the factual data from a foundation investigation carried out by Thurber Engineering Ltd. (Thurber) for the detailed design of High Mast Lighting (HML) poles at locations between Major Mackenzie Drive and the service station to the north of Teston Road along Highway 400 in the Regional Municipality of York, Ontario. Thurber has been retained by SNC-Lavalin, Engineers & Constructors (SNC-Lavalin) to carry out this investigation under the Ministry of Transportation Ontario (MTO) Agreement No. 2005-E-0037.

The purpose of this investigation was to determine the subsurface conditions in areas where HML poles are proposed and, based on this data, to provide a borehole locations drawing, records of boreholes, laboratory test results and a written description of the subsurface conditions.

In addition to the boreholes drilled specifically for the HML poles, reference has been made to information on subsurface conditions contained in other foundation reports. The titles of these reports are as follows:

- Thurber Engineering Ltd. report titled “Draft Foundation Investigation and Design Report, High Embankments, Teston Road to King Road, Highway 400 Widening, Vaughan, Ontario”, G.W.P. 2539-04-00, Report to SNC-Lavalin, File No. 19-92-68, May 14, 2007 (Reference 1).



- Thurber Engineering Ltd. report titled “Foundation Investigation and Design Report, Highway 400 Overhead Signs, Highway 400/Teston Road Interchange”, Report to McCormick Rankin, File No. 19-1351-66, January 26, 2005 (Reference 2).
- Thurber Engineering Ltd. report titled “Foundation Investigation and Design Report, Culvert Extensions and High Fill, Highway 400/Teston Road Interchange”, Report to McCormick Rankin, File No. 19-1351-66, January 26, 2005 (Reference 3).
- Thurber Engineering Ltd. report titled “Foundation Investigation and Design Report, Highway 400 Retaining Structure, Teston Road Interchange, Region of York, Ontario”, Report to McCormick Rankin, File No. 19-1351-66, January 26, 2005 (Reference 4).
- Thurber Engineering Ltd. report titled “Foundation Investigation and Design Report, Highway 400 – Teston Road, Region of York, Ontario”, Report to McCormick Rankin, File No. 19-1351-66, January 26, 2005 (Reference 5).

2.0 SITE DESCRIPTION

The HML poles are to be located along the alignment of the proposed Highway 400 widening, between the interchange at Major Mackenzie Drive and the service station just north of Teston Road. This is part of a project of broader scope involving the widening of Highway 400 from Major MacKenzie Drive to King Road.

The project area is located within the physiographic region known as the South Slope of the Oak Ridges Moraine, which comprised predominantly of the Halton drift (till). The Halton till is an interbedded complex of clayey silt to silt till and sand. This till comprises a slightly hummocky till plain, into which the surface watercourses have eroded 10 to 15 m deep gullies. Relatively recent fluvial sediments have been deposited in the gullies. The Halton drift overlies bedrock at depths in the order of 100 m in the vicinity of the project area.

Drainage in the vicinity of the project area is largely controlled by the Humber River and its tributaries. Localized drainage is facilitated by the creeks flowing within the gullies.

The land use adjacent to this section of Highway 400 is largely rural and agricultural, although there is increasing residential and commercial development in recent years.



3.0 INVESTIGATION PROCEDURES

3.1 Field Investigation

It is understood that 24 high mast pole locations have been proposed to date. According to SNC-Lavalin, these locations are tentative and are subject to change in the future. The approximate locations of these poles are described in Table 1 for reporting purposes only.

A borehole investigation program for the HML was carried out between November 19 and 23, 2007 when a total of eight (8) boreholes were advanced at selected locations within the Highway 400 right-of-way in the vicinities where new HML poles are to be constructed. The borehole locations are either on the highway shoulder, in the ditch at the embankment toe or within the construction zone in the Teston Road interchange area. These boreholes were terminated at between 10.9 m and 11.3 m depths. Relevant boreholes located within the subject section of Highway 400 are also referenced in this report and attached in Appendix C. The approximate locations of all relevant boreholes are shown on the Borehole Locations Plans immediately following the text and tables.

In each borehole, soil samples were obtained with a 50 mm outside diameter split spoon sampler driven in accordance with the Standard Penetration Test (SPT). Groundwater conditions in the open boreholes were observed throughout the drilling operations. Standpipe piezometers were installed in 3 selected boreholes to facilitate longer term monitoring of the groundwater levels. The borehole completion details are shown in Table 3.1 below.

Table 3.1 – Borehole Completion Details

Borehole Number	Piezometer Tip Depth / Elevation (m)	Completion Details
HML-1	None Installed	Bentonite holeplug to 0.15 m asphalt to surface
HML-2	None Installed	Bentonite holeplug to 0.15 m asphalt to surface
HML-3	None Installed	Bentonite holeplug to surface
HML-4	10.6 / 231.7	Sand from bottom to 8.5 m, bentonite grout to surface
HML-5	None Installed	Bentonite holeplug to surface



HML-7	11.3 / 234.2	Sand from bottom to 9.2 m, bentonite grout to surface
HML-8	None Installed	Bentonite holeplug to 0.15 m, asphalt to surface
HML-9	10.7 / 235.7	Sand from 10.7 m to 8.7 m, bentonite grout to 0.15 m, asphalt to surface

The drilling investigation was supervised on a full-time basis by a member of Thurber's field staff who located the boreholes in the field, cleared borehole locations of underground utilities, directed the drilling, sampling and in-situ testing operations, and logged the boreholes. The soil samples were identified in the field, placed in appropriately labelled containers and transported back to Thurber's laboratory for further examination and testing.

Upon completion of drilling, all boreholes were backfilled with bentonite and capped with cold patch asphalt where required. Results of field sampling and testing are presented on the Records of Boreholes in Appendix A.

3.2 Laboratory Testing

Geotechnical laboratory testing consisted of natural moisture content determination and visual identification of all soil samples in accordance with the current MTO standards. Grain size distribution analysis and Atterberg Limits tests were conducted on selected samples. All laboratory test results are presented in Appendices A and B.

4.0 SUBSURFACE STRATIGRAPHY

4.1 General

This section presents a generalized summary of the subsurface conditions encountered in Boreholes HML-1, HML-2, HML-3, HML-4, HML-5, HML-7, HML-8 and HML-9. The detailed subsurface soil and groundwater conditions encountered in these boreholes are presented in the Records of Boreholes in Appendix A. Selected boreholes from References 1 to 5 are referenced in this report, but are not discussed in this section. The actual borehole data closest to an HML location governs any interpretation of the site conditions at that specific pole location. It



should be recognized that the subsurface conditions may vary between and beyond the borehole locations.

In general, the subsurface conditions encountered in the boreholes consist of pavement structure, embankment fill or topsoil overlying native silty clay, which is exposed at ground surface at some locations. The surficial soils overlie silty clay till which is itself underlain by deposits of sand and silty sand to sandy silt at some locations. Most boreholes were either dry or wet near the bottom upon completion of drilling.

4.2 Pavement Structure

Pavement structure consisting of asphalt overlying granular materials was encountered in Boreholes HML-1, HML-2, HML-8 and HML-9. The thickness of the asphalt ranges between 125 mm and 190 mm. The granular materials consist of sand to gravelly sand ranging between 1.1 m and 1.2 m in thickness. These soils are typically in a compact state as indicated by SPT 'N' values ranging between 10 and 30 blows per 0.3 m penetration. The base of the granular materials vary from Elevations 232.7 m to 245.1 m.

Figure B1 presents the grain size distribution of a sample of the gravelly sand fill. These results are summarized in the following table. The measured moisture contents of the granular fill were typically in the order of 2% to 8%.

Soil Particles	%
Gravel	26
Sand	66
Silt and Clay	8

4.3 Embankment Fill

Below the pavement structure, embankment fill was encountered in Boreholes HML-1 and HML-2. The fill is a brown silty clay with trace gravel and sand. SPT 'N' values of 23 and 20 blows per 0.3 m penetration indicate a very stiff consistency. The base of the fill was found to be at Elevations 231.8 m and 236.8 m.



Figure B2 presents the grain size distribution curve of a silty clay fill sample. These results are also summarized in the following table.

Soil Particles	%
Gravel	0
Sand	23
Silt	56
Clay	21

4.4 Silty Clay

A deposit of native cohesive silty clay was encountered below the pavement structure and fill or topsoil, or exposed at the ground surface, in all except Borehole HML-5. This soil contains trace to some sand, trace gravel, trace rootlets and topsoil staining. This deposit was 0.6 m to 2.2 m in thickness and is typically brown to dark brown in colour. The base of the silty clay was found to vary between Elevations 230.9 m and 243.4 m.

Measured SPT 'N' values range between 6 blows and 18 blows per 0.3 m penetration, indicating that the silty clay has a firm to very stiff consistency. An occasional 'N' value of 35 blows per 0.3 m penetration indicates the presence of a hard zone.

Figures B3 and B4 present the grain size distribution curves and Atterberg limits test results of silty clay samples. The test results are summarized in the tables below. Measured moisture contents of the silty clay samples generally ranged between 15% and 28%.

Soil Particles	%
Gravel	0 to 2
Sand	20 to 30
Silt	45 to 54
Clay	18 to 30

Index Property	%
Liquid Limit	26 to 35
Plastic Limit	14 to 17
Plasticity Index	12 to 18



The above results show that the silty clay is typically of low to medium plasticity with a group symbol of CL to CI.

4.5 Silty Clay Till

The silty clay described above is underlain by a silty clay till in all except Borehole HML-5 where the till is encountered at ground surface. This soil contains trace to some sand, trace gravel. This till is 2.1 m to greater than 10.5 m in thickness and is typically brown changing to grey at some locations. The base of the till was found to vary between Elevations 226.0 m and 238.7 m.

Measured SPT 'N' values generally increase with depth, ranging from 15 blows per 0.3 m penetration to greater than 50 blows for less than 0.3 m penetration, indicating that the till has a very stiff to hard consistency. The high 'N' values infer the presence of cobbles and/or boulders.

Figures B5 to B7 present the grain size distribution curves and Atterberg limits test results of silty clay till samples. The test results are summarized in the tables below. Measured moisture contents of the silty clay samples generally ranged from 8% to 15% with occasional higher values.

Soil Particles	%
Gravel	0 to 3
Sand	11 to 26
Silt	50 to 57
Clay	20 to 30

Index Property	%
Liquid Limit	24 to 29
Plastic Limit	13 to 15
Plasticity Index	11 to 14

The above results show that the silty clay has low plasticity with a group symbol of CL.



Glacial tills inherently contains cobbles and boulders, and were inferred by the refusal 'N' values recorded in the boreholes.

4.6 Sand, Silty Sand to Sandy Silt

Deposits of sands, silty sands to sandy silts were encountered below the silty clay till in Boreholes HML-1, HML-2, HML-4, HML-5 and HML-9. These deposits were not fully penetrated in any of these boreholes. Where encountered, the measured SPT 'N' values vary between 50 blows per 0.3 m penetration to greater than 50 blows for less than 0.3 m penetration, indicating very dense conditions.

Figures B8 to B10 present grain size distribution curves of silt and sand samples. These test results are summarized in the table below. Measured moisture contents of the sand and silt samples typically ranged from 6% to 25%.

Soil Particles	%
Sandy Silt	
Gravel	0
Sand	29
Silt	65
Clay	6

Soil Particles	%
Sand to Silty Sand	
Gravel	0
Sand	63 to 91
Silt and Clay	9 to 37

4.7 Groundwater Conditions

Groundwater conditions were observed during and upon completion of drilling. A majority of the boreholes were dry upon completion. Free water was found accumulating near the bottom of Boreholes HML-4, HML-7 and HML-9 upon completion.



Standpipe piezometers were installed in these three boreholes and measured water levels are presented in Table 4.1:

Table 4.1 Water Level Measurements

Borehole (Screen location)	Date	Depth (m)	Elevation (m)
HML-4 (sand)	January 31, 2008	10.2	232.2
HML-7 (silty clay)	January 31, 2008		Found destroyed
HML-9 (sandy silt)	January 31, 2008		Could not be found (presumed destroyed)

Previous borehole results and observations as discussed above indicate that the groundwater level is at or below 6 m to 8 m depths at the borehole locations. It should be noted that these are very short term observations and groundwater levels are subject to seasonal fluctuations and severe climatic events.

5.0 MISCELLANEOUS

Thurber staked and/or marked the borehole locations in the field and obtained utility clearances prior to drilling. J. D. Barnes Limited surveyed the as-drilled locations, and provided northing and easting coordinates and ground surface elevations.

Walker Drilling Ltd. of Barrie, Ontario supplied the drill rig and conducted the drilling, sampling and in-situ testing operations. Traffic control during the field work was provided by Barricade Traffic Services Inc. where required.

The drilling and sampling operations in the field were supervised on a full time basis by Mr. Stephane Loranger of Thurber. Laboratory testing was carried out by Thurber in its MTO-approved Oakville laboratory.

Dr. Sydney Pang, P.Eng provided overall direction of the field operations and prepared the report. Dr. P.K. Chatterji, P.Eng., a Designated Principal Contact for MTO Foundations projects, reviewed the report.









Sydney Pang, P.Eng.
Associate, Senior Project Engineer



P.K. Chatterji, P.Eng.
Review Principal, Designated MTO Contact



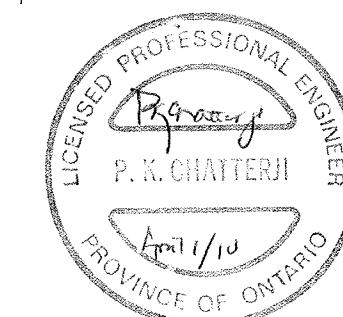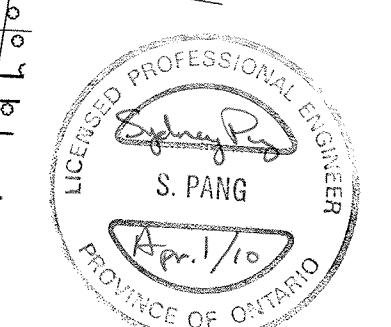

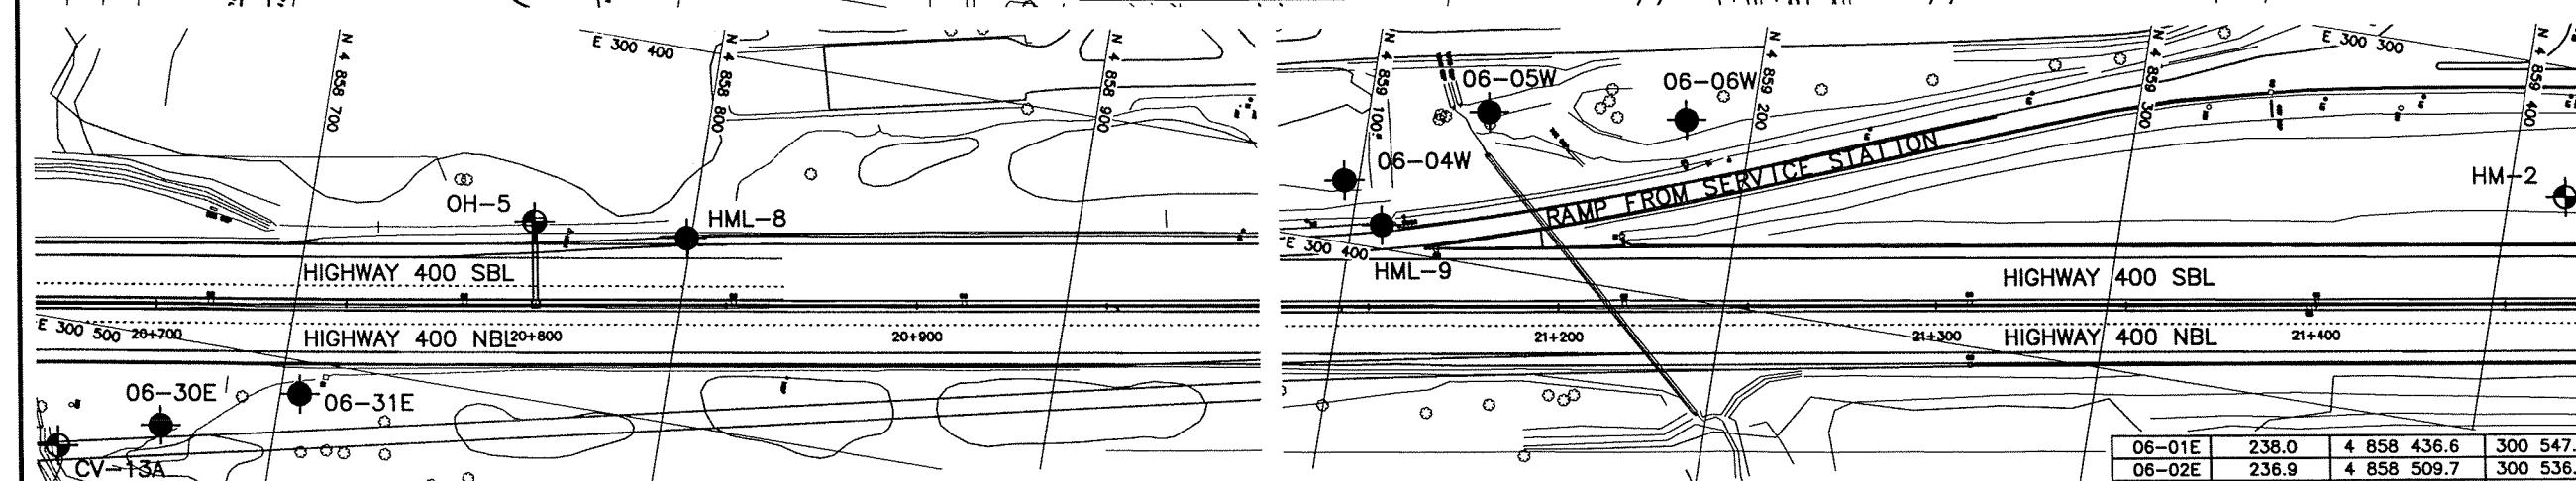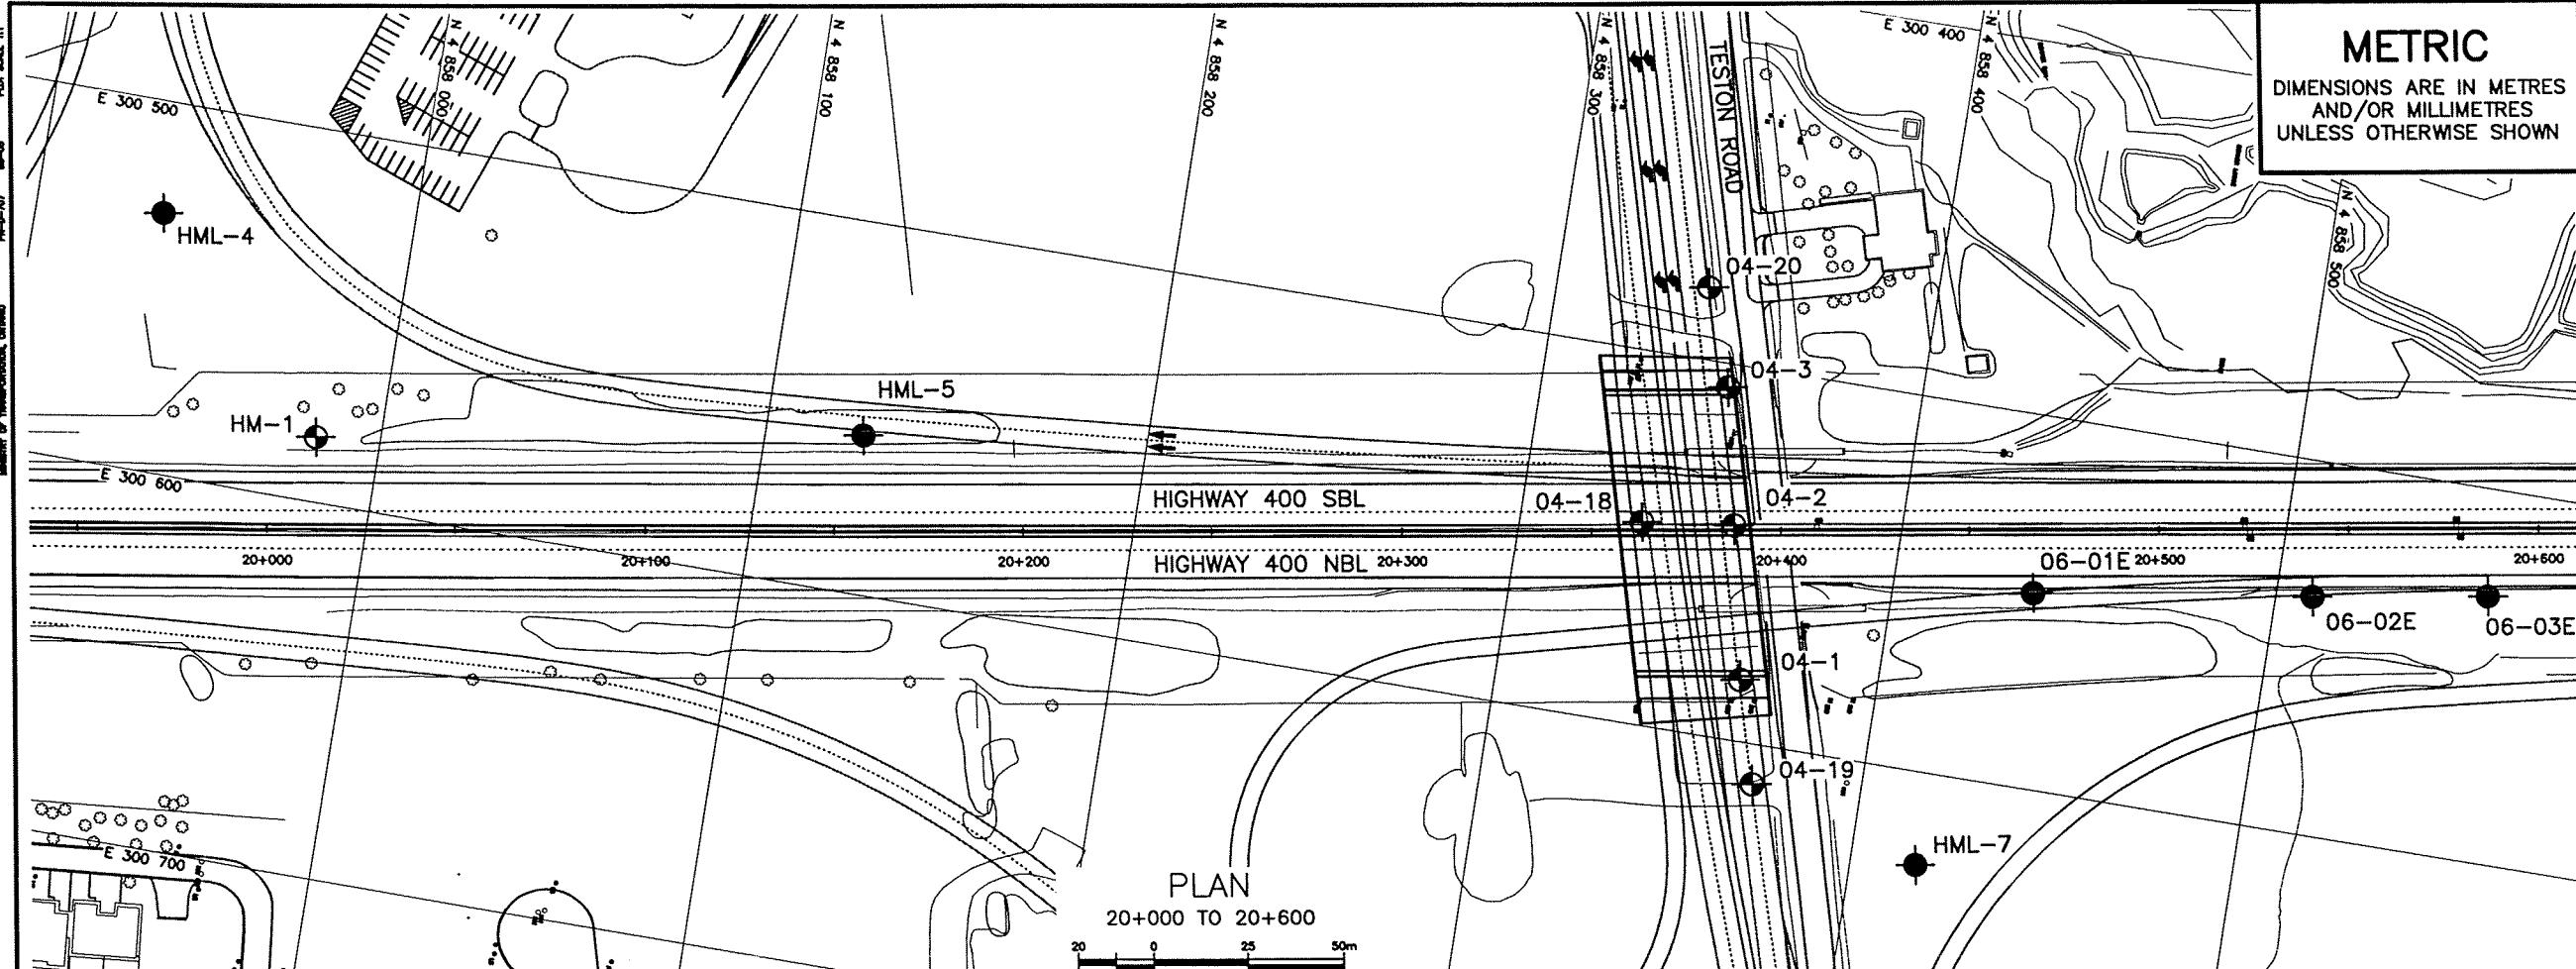

METRIC

DIMENSIONS ARE IN METRES
AND/OR MILLIMETRES
UNLESS OTHERWISE SHOWN

HIGHWAY 400
CONT No
GWP No 2539-04-00




HWY 400 WIDENING
MAJOR MACKENZIE DRIVE TO
NORTH OF TESTON ROAD
BOREHOLE LOCATIONS PLAN

SHEET

SNC-LAVALIN
Engineers & Constructors

THURBER ENGINEERING LTD.
GEOTECHNICAL • ENVIRONMENTAL • MATERIALS

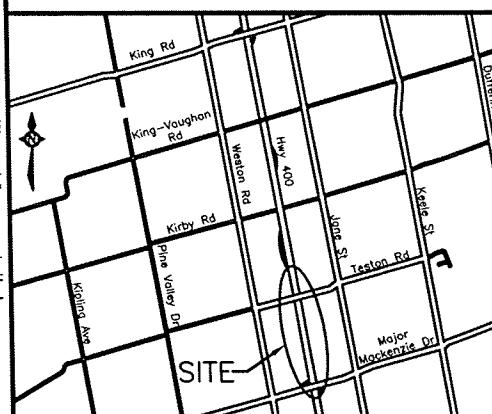

KEYPLAN

LEGEND

●	Borehole (Current Investigation)
◆	Borehole (Previous Investigations)
Blows /0.3m (Std Pen Test, 475J/blow)	
Blows /0.3m (60° Cone, 475J/blow)	
CONE	
PH	
■	Pressure, Hydraulic
+	Water Level
*	Head Artesian Water
+	Piezometer
90% A/R	Rock Quality Designation (RQD)
	Auger Refusal

NO	ELEVATION	NORTHING	EASTING
CV-13A	229.0	4 858 645.1	300 533.6
CV-13B	229.7	4 858 656.8	300 557.6
HM-1*	-	4 857 983.0	300 582.7
HM-2*	-	4 859 414.8	300 334.5
HML-4	242.4	4 857 933.4	300 530.1
HML-5	240.9	4 858 125.7	300 557.4
HML-7	245.5	4 858 417.3	300 624.8
HML-8	240.4	4 858 798.9	300 450.3
HML-9	246.3	4 859 107.8	300 393.7
OH-5	239.9	4 858 758.9	300 452.7
04-1	245.0	4 858 363.9	300 583.6
04-2	239.0	4 858 356.0	300 542.9
04-3	244.2	4 858 348.8	300 506.4
04-18	239.5	4 858 332.0	300 546.0
04-19	245.4	4 858 371.2	300 610.7
04-20	243.5	4 858 339.9	300 480.6

NOTES

- * THE COORDINATES FOR HM-1 AND HM-2 WERE ESTIMATED VALUES.

1) The boundaries between soil strata have been established only at Borehole locations. Between Boreholes the boundaries are assumed from geological evidence.

2) This drawing is for subsurface information only. Surface details and features are for conceptual illustration.

GEOCRES No. 30M13-164

REVISIONS	DRAWING NOT TO BE SCALED			ISSUED IN DRAFT		
	FEB08	SKP	DATE	BY	DESCRIPTION	
	DESIGN	SKP	CHK PKC	CODE	LOAD	DATE MAR 2010
	DRAWN	MFA	CHK PKC	SITE	STRUCT	DWG 2

High Mast Lighting Poles
Highway 400, Major MacKenzie to North of Teston

Appendix A

**Record of Boreholes
(Present Investigation)**

19-92-68



SYMBOLS, ABBREVIATIONS AND TERMS USED ON RECORDS OF BOREHOLES

1. TEXTURAL CLASSIFICATION OF SOILS

CLASSIFICATION	PARTICLE SIZE	VISUAL IDENTIFICATION
Boulders	Greater than 200mm	same
Cobbles	75 to 200mm	same
Gravel	4.75 to 75mm	5 to 75mm
Sand	0.075 to 4.75mm	Not visible particles to 5mm
Silt	0.002 to 0.075mm	Non-plastic particles, not visible to the naked eye
Clay	Less than 0.002mm	Plastic particles, not visible to the naked eye

2. COARSE GRAIN SOIL DESCRIPTION (50% greater than 0.075mm)

TERMINOLOGY	PROPORTION
Trace or Occasional	Less than 10%
Some	10 to 20%
Adjective (e.g. silty or sandy)	20 to 35%
And (e.g. sand and gravel)	35 to 50%

3. TERMS DESCRIBING CONSISTENCY (COHESIVE SOILS ONLY)

DESCRIPTIVE TERM	UNDRAINED SHEAR STRENGTH (kPa)	APPROXIMATE SPT ⁽¹⁾ 'N' VALUE
Very Soft	12 or less	Less than 2
Soft	12 to 25	2 to 4
Firm	25 to 50	4 to 8
Stiff	50 to 100	8 to 15
Very Stiff	100 to 200	15 to 30
Hard	Greater than 200	Greater than 30

NOTE: Hierarchy of Soil Strength Prediction

- 1) Laboratory Triaxial Testing
- 2) Field Insitu Vane Testing
- 3) Laboratory Vane Testing
- 4) SPT value
- 5) Pocket Penetrometer

4. TERMS DESCRIBING DENSITY (COHESIONLESS SOILS ONLY)

DESCRIPTIVE TERM	SPT "N" VALUE
Very Loose	Less than 4
Loose	4 to 10
Compact	10 to 30
Dense	30 to 50
Very Dense	Greater than 50

5. LEGEND FOR RECORDS OF BOREHOLES

SYMBOLS AND ABBREVIATIONS FOR SAMPLE TYPE	SS Split Spoon Sample TW Thin Wall Shelby Tube Sample PH Sampler Advanced by Hydraulic Pressure WH Sampler Advanced by Self Static Weight	WS Wash Sample TP Thin Wall Piston Sample PM Sampler Advanced by Manual Pressure RC Rock Core SC Soil Core	AS Auger (Grab) Sample TP Thin Wall Piston Sample PM Sampler Advanced by Manual Pressure RC Rock Core SC Soil Core
--	--	--	--

Sensitivity = $\frac{\text{Undisturbed Shear Strength}}{\text{Remoulded Shear Strength}}$

Water Level
 C_{pen} Shear Strength Determination by Pocket Penetrometer

- (1) SPT 'N' Value Standard Penetration Test 'N' Value – refers to the number of blows from a 63.5kg hammer free falling a height of 0.76m to advance a standard 50 mm outside diameter split spoon sampler for 0.3 m depth into undisturbed ground.
- (2) DCPT Dynamic Cone Penetration Test – Continuous penetration of a 50 mm outside diameter, 60° conical steel point attached to "A" size rods driven by a 63.5 kg hammer free falling a height of 0.76 m. The resistance to cone penetration is the number of hammer blows required for each 0.3 m advance of the conical point into undisturbed ground.

UNIFIED SOILS CLASSIFICATION

MAJOR DIVISIONS	GROUP SYMBOL	TYPICAL DESCRIPTION	
COARSE GRAINED SOILS	GRAVEL AND GRAVELLY SOILS	GW	Well-graded gravels or gravel-sand mixtures, little or no fines.
		GP	Poorly-graded gravels or gravel-sand mixtures, little or no fines.
		GM	Silty gravels, gravel-sand-silt mixtures.
		GC	Clayey gravels, gravel-sand-clay mixtures.
	SAND AND SANDY SOILS	SW	Well-graded sands or gravelly sands, little or no fines.
		SP	Poorly-graded sands or gravelly sands, little or no fines.
		SM	Silty sands, sand-silt mixtures.
		SC	Clayey sands, sand-clay mixtures.
	SILTS AND CLAYS $W_L < 50\%$	ML	Inorganic silts and very fine sands, rock flour, silty or clayey fine sands or clayey silts with slight plasticity.
		CL	Inorganic clays of low to medium plasticity, gravelly clays, sandy clays, silty clays, lean clays. ($W_L < 30\%$).
		CI	Inorganic clays of medium plasticity, silty clays. ($30\% < W_L < 50\%$).
		OL	Organic silts and organic silty-clays of low plasticity.
FINE GRAINED SOILS	SILTS AND CLAYS $W_L > 50\%$	MH	Inorganic silts, micaceous or diatomaceous fine sandy or silty soils, elastic silts.
		CH	Inorganic clays of high plasticity, fat clays.
		OH	Organic clays of medium to high plasticity, organic silts.
HIGHLY ORGANIC SOILS	Pt	Peat and other highly organic soils.	
CLAY SHALE			
SANDSTONE			
SILTSTONE			
CLAYSTONE			
COAL			

EXPLANATION OF ROCK LOGGING TERMS

<u>ROCK WEATHERING CLASSIFICATION</u>		<u>SYMBOLS</u>		
Fresh (FR)	No visible signs of weathering.			
Fresh Jointed (FJ)	Weathering limited to the surface of major discontinuities.	 CLAYSTONE		
Slightly Weathered (SW)	Penetrative weathering developed on open discontinuity surfaces, but only slight weathering of rock material.	 SILTSTONE		
Moderately Weathered (MW)	Weathering extends throughout the rock mass, but the rock material is not friable.	 SANDSTONE		
Highly Weathered (HW)	Weathering extends throughout the rock mass and the rock is partly friable.	 COAL		
Completely Weathered (CW)	Rock is wholly decomposed and in a friable condition, but the rock texture and structure are preserved.	 Bedrock (general)		
<u>DISCONTINUITY SPACING</u>		<u>STRENGTH CLASSIFICATION</u>		
Bedding	Bedding Plane Spacing	Rock Strength	Approximate Uniaxial Compressive Strength (MPa)	Field Estimation of Hardness*
Very thickly bedded	Greater than 2m	Extremely Strong	Greater than 250	Specimen can only be chipped with a geological hammer
Thickly bedded	0.6 to 2m	Very Strong	100-250	Requires many blows of geological hammer to break
Medium bedded	0.2 to 0.6m	Strong	50-100	Requires more than one blow of geological hammer to break
Thinly bedded	60mm to 0.2m	Medium Strong	25.0 to 50.0	Breaks under single blow of geological hammer.
Very thinly bedded	20 to 60mm	Weak	5.0 to 25.0	Can be peeled by a pocket knife with difficulty
Laminated	6 to 20mm	Very Weak	1.0 to 5.0	Can be peeled by a pocket knife, crumbles under firm blows of geological pick.
Thinly Laminated	Less than 6mm	Extremely Weak (Rock)	0.25 to 1.0	Indented by thumbnail
<u>TERMS</u>				
Total Core Recovery: (TCR)	Core recovered as a percentage of total core run length.			
Solid Core Recovery: (SCR)	Percent Ratio of solid core of full cylindrical shape recovered. Expressed with respect to the total length of core run.			
Rock Quality Designation: (RQD)	Total length of sound core recovered in pieces 0.1m in length or larger as a percentage of total core run length.			
Uniaxial Compressive Strength (UCS)	Axial stress required to break the specimen			
Fracture Index: (FI)	Frequency of natural fractures per 0.3m of core run.			

RECORD OF BOREHOLE No HML-1

1 OF 2

METRIC

G.W.P. 2539-04-00 LOCATION Major Mackenzie Drive to N of Teston Road N 4 856 685.46 E 300 848.28 ORIGINATED BY SLL
 HWY 400 BOREHOLE TYPE Solid Stem Augers COMPILED BY ES
 DATUM Geodetic DATE 2007.11.19 - 2007.11.19 CHECKED BY SKP

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)		
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			20	40	60	80	100	SHEAR STRENGTH kPa	○ UNCONFINED + FIELD VANE	● QUICK TRIAXIAL X LAB VANE	20	40	60	kN/m ³
233.9																			
0.0	ASPHALT: (125mm)																		
0.1	Gravelly SAND, trace silt Compact Brown Moist (FILL)		1	AS															
232.7			1	SS	10														
1.2	Silty CLAY, trace gravel, trace sand Very Stiff Brown Moist (FILL)		2	SS	23														
231.8			3	SS	6														
2.0	Silty CLAY, trace sand, topsoil stained Firm Dark Brown Moist trace sand seams		4	SS	19														
230.9			5	SS	50/														
3.0	Silty CLAY, some sand, trace gravel, some sand seams Very Stiff Brown Moist (TILL) becoming Hard		6	SS	96/ 275														
226.0			7	SS	50/														
7.8	Silty SAND Very Dense Brown Moist		8	SS	90/ 275														

Continued Next Page

+³, X³; Numbers refer to
Sensitivity 15⁻⁵ 20⁻⁵ (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No HML-1

2 OF 2

METRIC

G.W.P. 2539-04-00 LOCATION Major Mackenzie Drive to N of Teston Road N 4 856 685.46 E 300 848.28 ORIGINATED BY SLL
 HWY 400 BOREHOLE TYPE Solid Stem Augers COMPILED BY ES
 DATUM Geodetic DATE 2007.11.19 - 2007.11.19 CHECKED BY SKP


SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W_P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W_L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			20	40	60	80	100	SHEAR STRENGTH kPa	20	40	60	80	100
222.9	Silty SAND Very Dense Brown Moist			9	SS	.100	223						○					
10.9	END OF BOREHOLE AT 10.92m. BOREHOLE OPEN AND DRY UPON COMPLETION. BOREHOLE BACKFILLED WITH BENTONITE HOLEPLUG TO 150mm THEN ASPHALT TO SURFACE.																	

RECORD OF BOREHOLE No HML-2

1 OF 2

METRIC

G.W.P. 2539-04-00 LOCATION Major Mackenzie Drive to N of Teston Road N 4 857 119.62 E 300 734.12 ORIGINATED BY SLL
 HWY 400 BOREHOLE TYPE Solid Stem Augers COMPILED BY ES
 DATUM Geodetic DATE 2007.11.20 - 2007.11.20 CHECKED BY SKP

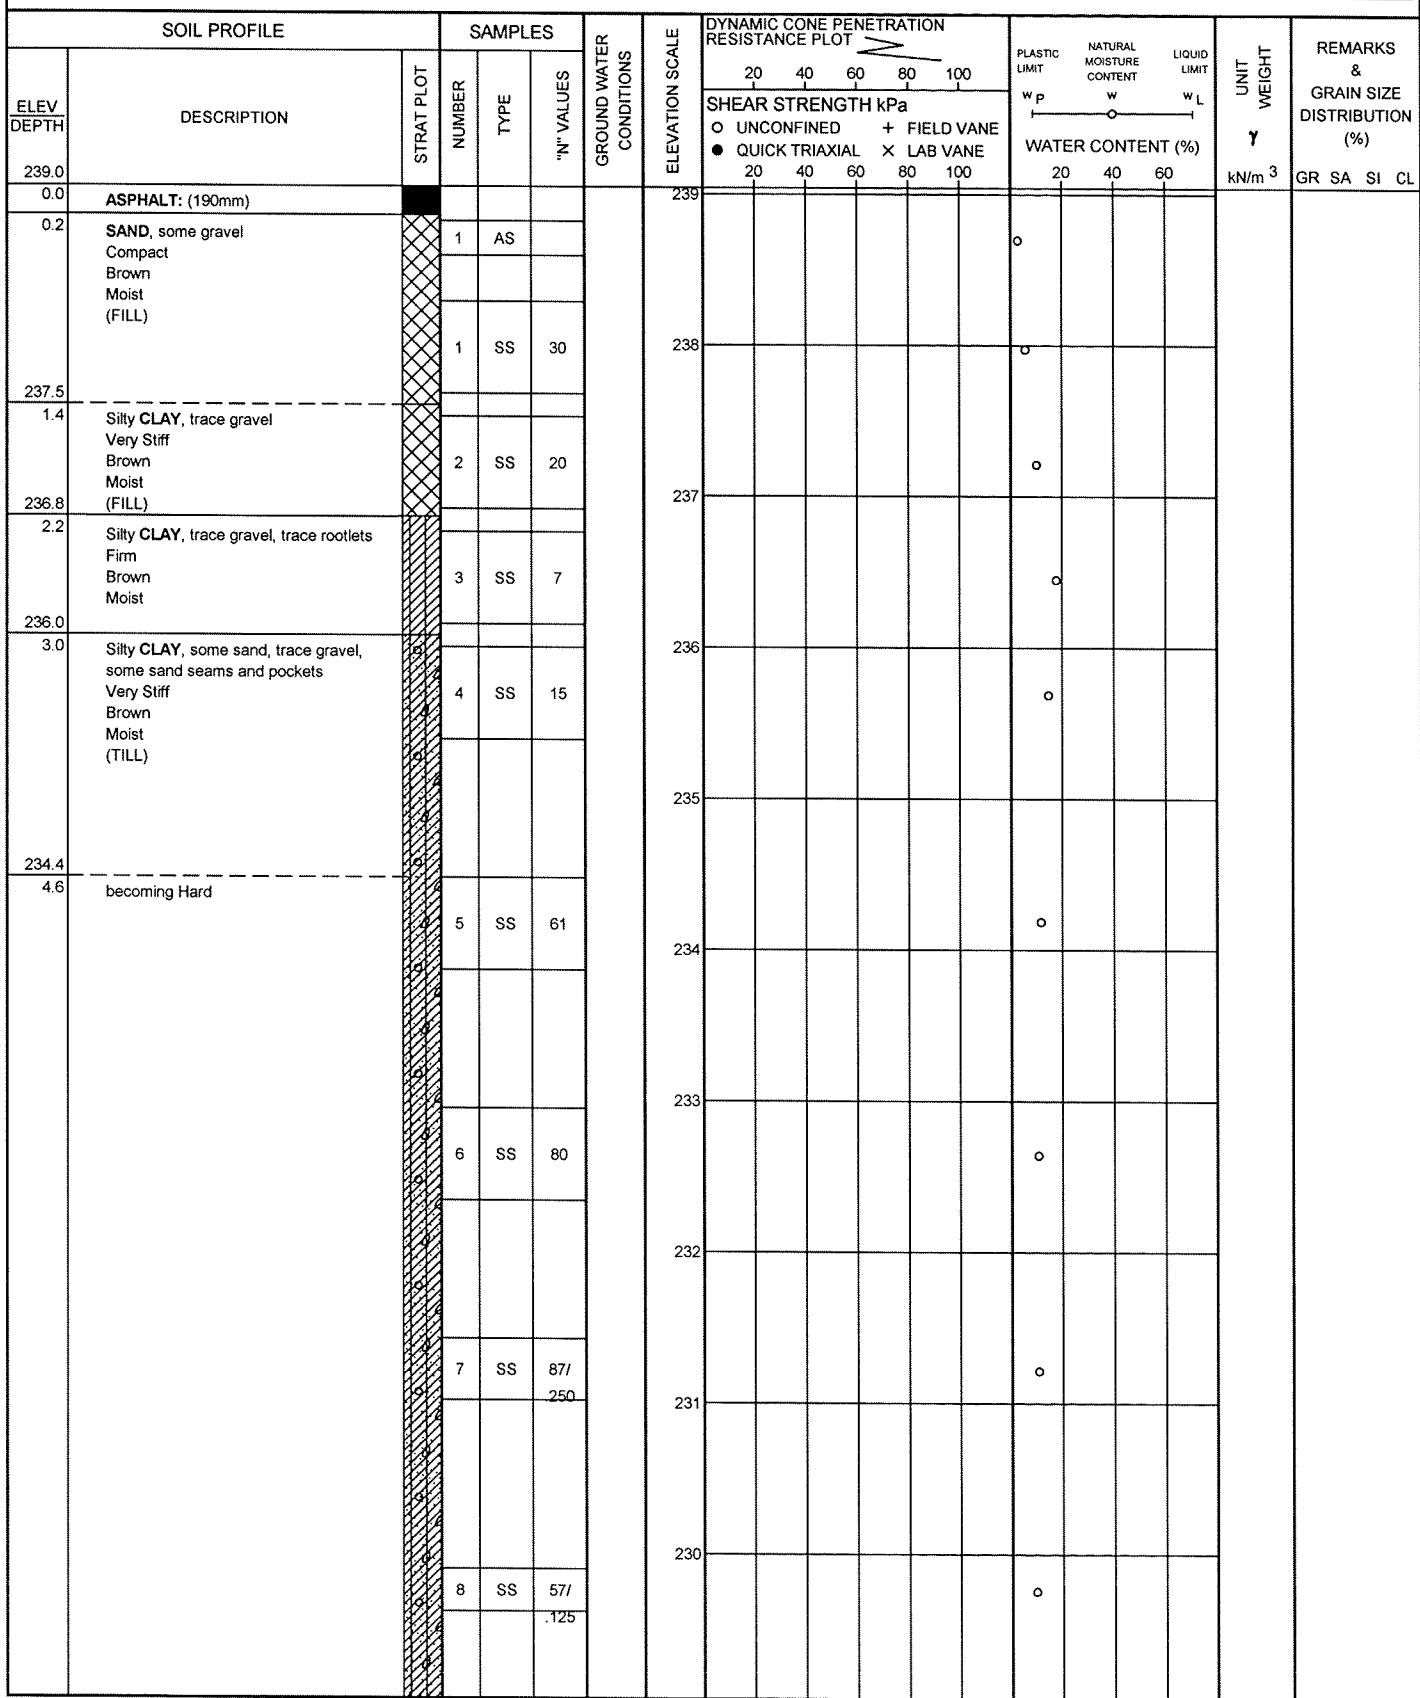

RECORD OF BOREHOLE No HML-2

2 OF 2

METRIC

G.W.P. 2539-04-00 LOCATION Major Mackenzie Drive to N of Teston Road N 4 857 119.62 E 300 734.12 ORIGINATED BY SLL
 HWY 400 BOREHOLE TYPE Solid Stem Augers COMPILED BY ES
 DATUM Geodetic DATE 2007.11.20 - 2007.11.20 CHECKED BY SKP

SOIL PROFILE			SAMPLES			ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)			
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES		GROUND WATER CONDITIONS	20	40	60	80	100	SHEAR STRENGTH kPa	○ UNCONFINED + FIELD VANE	● QUICK TRIAXIAL X LAB VANE	20	40	60	kN/m ³
228.6	Silty CLAY, trace gravel, some sand, sand seams and pockets					229													
10.4	SAND, trace to some silt Very Dense Brown Moist			9	SS	100													
227.9						228							○						
11.1	END OF BOREHOLE AT 11.13m. BOREHOLE OPEN AND DRY UPON COMPLETION. BOREHOLE BACKFILLED WITH BENTONITE HOLEPLUG TO 150mm THEN ASPHALT TO SURFACE.																		

RECORD OF BOREHOLE No HML-3

1 OF 2

METRIC

G.W.P. 2539-04-00

LOCATION Major Mackenzie Drive to N of Teston Road N 4 857 537.12 E 300 652.63

ORIGINATED BY SLL

HWY 400

BOREHOLE TYPE Solid Stem Augers

COMPILED BY ES

DATUM Geodetic

DATE 2007.11.22 - 2007.11.22

CHECKED BY SKP

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES		SHEAR STRENGTH kPa										
240.1							20 40 60 80 100	FIELD VANE									
0.0	Silty CLAY, trace rootlets Brown Moist to Wet						○ UNCONFINED	● QUICK TRIAXIAL	×	+	LAB VANE	20 40 60 80 100					
239.5							240										
0.6	Silty CLAY, some sand, trace gravel, with sand seams Very Stiff Brown Moist (TILL) becoming Hard		1	SS	24												
			2	SS	39		239										
			3	SS	73												
			4	SS	79		238										
			5	SS	58												
			6	SS	66		237										
			7	SS	68												
			8	SS	62		236										
							235										
							234										
							233										
							232										
							231										
0 19 54 26																	
0 11 58 32																	

Continued Next Page

+³, X³: Numbers refer to
Sensitivity 15 + 5 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No HML-3

2 OF 2

METRIC

G.W.P. 2539-04-00 LOCATION Major Mackenzie Drive to N of Teston Road N 4 857 537.12 E 300 652.63 ORIGINATED BY SLL
 HWY 400 BOREHOLE TYPE Solid Stem Augers COMPILED BY ES
 DATUM Geodetic DATE 2007.11.22 - 2007.11.22 CHECKED BY SKP

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV	DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES	20 40 60 80 100	SHEAR STRENGTH kPa					20 40 60	kN/m ³			
		Continued From Previous Page															
228.9	11.1	Silty CLAY, some sand, trace gravel, with sand seams Hard Grey Moist (TILL)		9	SS	83	230										
		END OF BOREHOLE AT 11.13m. BOREHOLE OPEN AND DRY UPON COMPLETION. BOREHOLE BACKFILLED WITH BENTONITE HOLEPLUG TO SURFACE.															

RECORD OF BOREHOLE No HML-4

1 OF 2

METRIC

G.W.P. 2539-04-00

LOCATION Major Mackenzie Drive to N of Teston Road N 4 857 933.44 E 300 530.14

ORIGINATED BY SLL

HWY 400


BOREHOLE TYPE Solid Stem Augers

COMPILED BY ES

DATUM Geodetic

DATE 2007.11.22 - 2007.11.22

CHECKED BY SKP

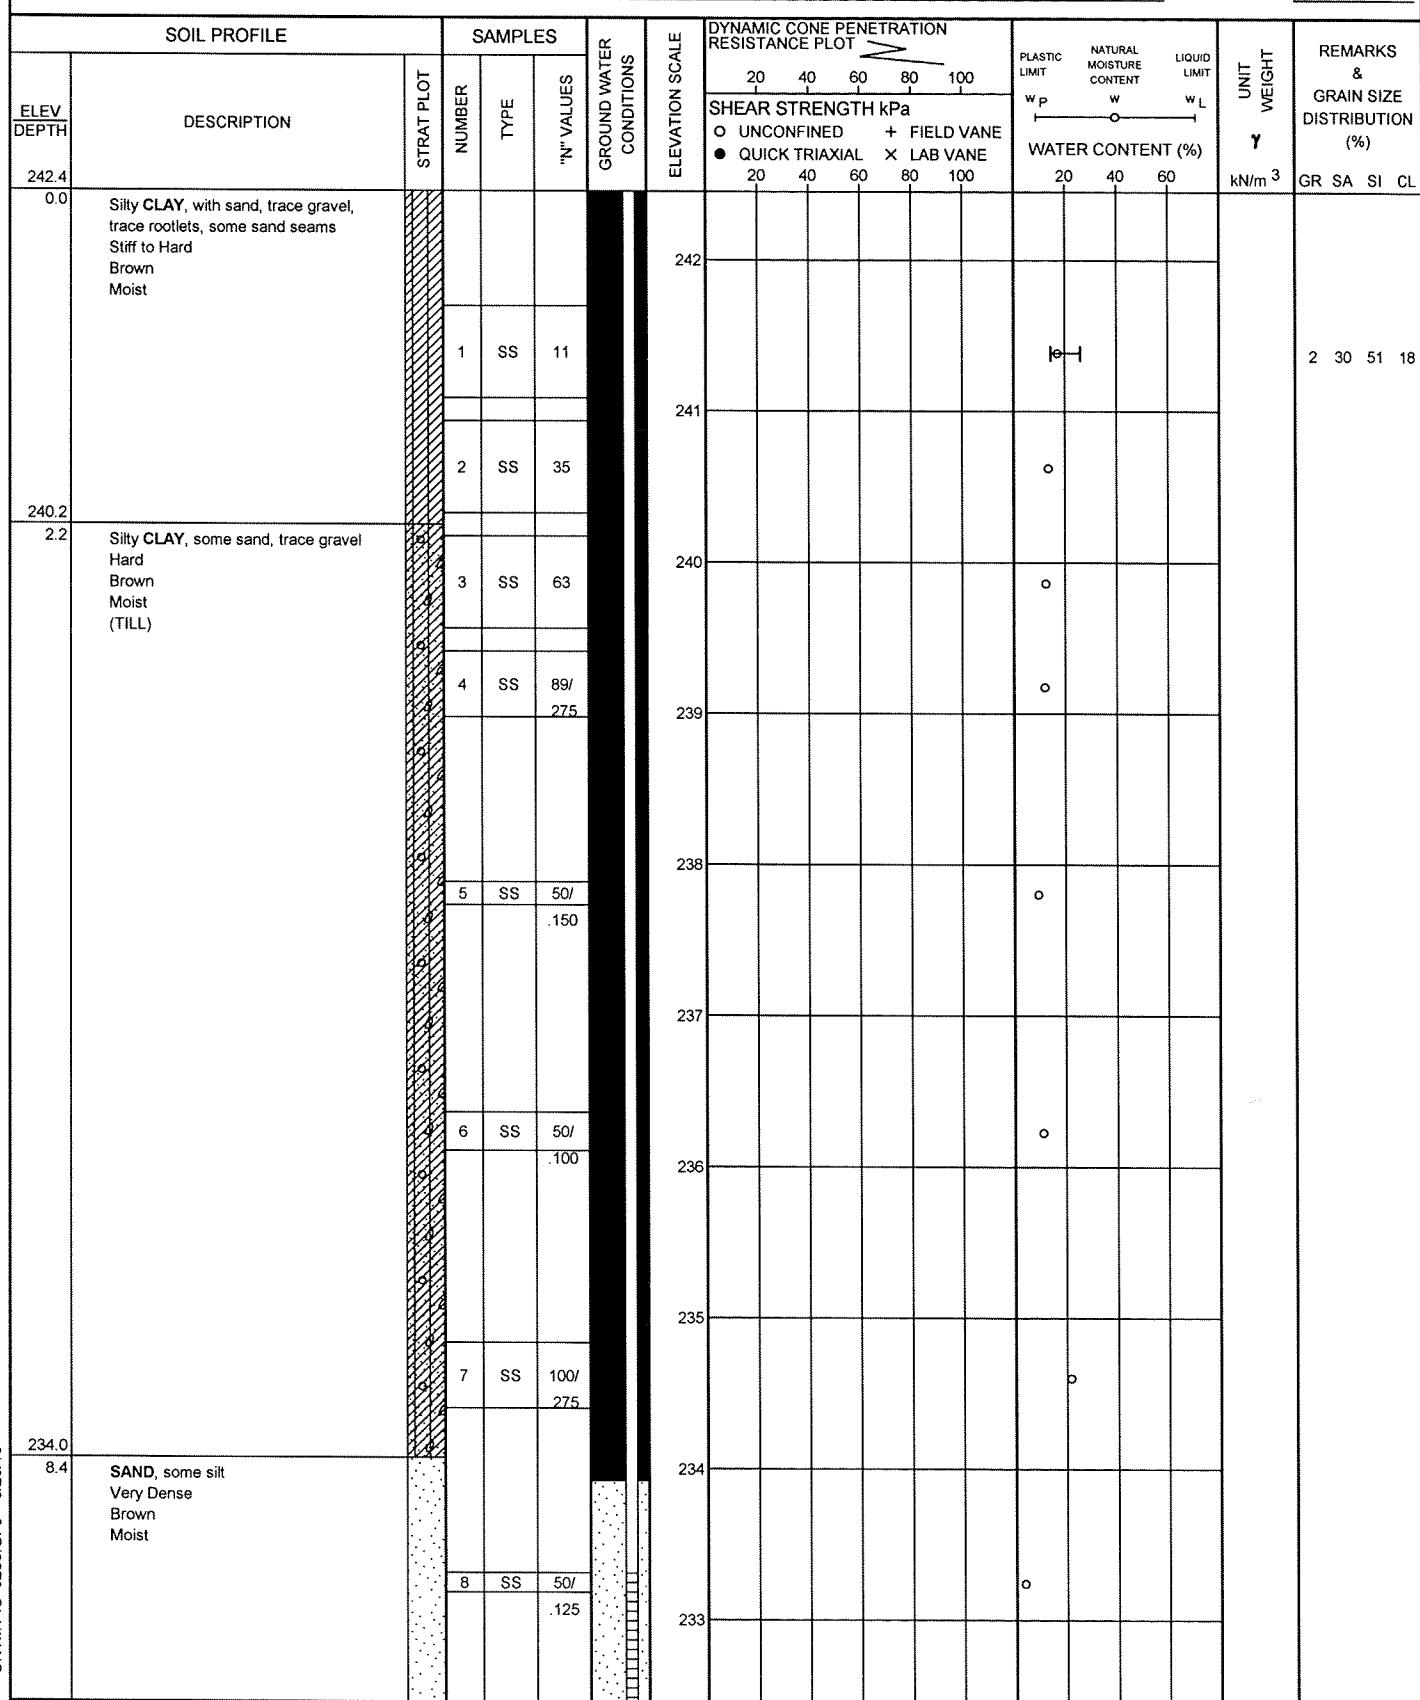

RECORD OF BOREHOLE No HML-4

2 OF 2

METRIC

G.W.P. 2539-04-00 LOCATION Major Mackenzie Drive to N of Teston Road N 4 857 933.44 E 300 530.14 ORIGINATED BY SLL
 HWY 400 BOREHOLE TYPE Solid Stem Augers COMPILED BY ES
 DATUM Geodetic DATE 2007.11.22 - 2007.11.22 CHECKED BY SKP

SOIL PROFILE			SAMPLES			ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)		
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES		GROUND WATER CONDITIONS	20	40	60	80	100	SHEAR STRENGTH kPa	20	40	60	kN/m ³	GR SA SI CL
231.4	SAND, some silt Very Dense Brown Moist					▼							○					
10.9	END OF BOREHOLE AT 10.95m. BOREHOLE BACKFILLED WITH BENTONITE HOLEPLUG TO 0.6m THEN AUGER CUTTINGS TO SURFACE. Piezometer installation consists of 30mm diameter schedule 40 PVC pipe with a 1.52m slotted screen. WATER LEVEL READINGS: DATE DEPTH (m) ELEV. (m) 2008.01.31 10.2 232.2				.125													

RECORD OF BOREHOLE No HML-5

1 OF 2

METRIC

G.W.P. 2539-04-00 LOCATION Major Mackenzie Drive to N of Teston Road N 4 858 125.72 E 300 557.38 ORIGINATED BY SLL
 HWY 400 BOREHOLE TYPE Solid Stem Augers COMPILED BY ES
 DATUM Geodetic DATE 2007.11.22 - 2007.11.22 CHECKED BY SKP

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			20	40	60	80	100	SHEAR STRENGTH kPa				
240.9																	
0.0	Silty CLAY, some sand, trace gravel Hard Brown Moist (TILL)		1	SS	50/ .150									o			
238.7			2	SS	87/ 250									o			
2.1	SAND, trace to some silt Very Dense Brown Moist		3	SS	89/ 275									o			
			4	SS	97/ 275									o			
			5	SS	89/ 275									o			
			6	SS	86/ 275									o			
			7	SS	83/ 275									o			
			8	SS	50/ .125									o			
ONTMITS 9268.GPJ 3/29/10																	

Continued Next Page

+ 3 . $\times ^3$: Numbers refer to
Sensitivity 15 \pm 5 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No HML-5

2 OF 2

METRIC

G.W.P. 2539-04-00 LOCATION Major Mackenzie Drive to N of Teston Road N 4 858 125.72 E 300 557.38 ORIGINATED BY SLL
 HWY 400 BOREHOLE TYPE Solid Stem Augers COMPILED BY ES
 DATUM Geodetic DATE 2007.11.22 - 2007.11.22 CHECKED BY SKP

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	WATER CONTENT (%)	kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			20 40 60 80 100	SHEAR STRENGTH kPa	20 40 60 80 100	○ UNCONFINED + FIELD VANE	● QUICK TRIAXIAL X LAB VANE	20 40 60	GR SA SI CL	20 40 60	W _L			
229.9	SAND, trace to some silt Very Dense Brown Moist			SS	50/		230						○						
11.0	END OF BOREHOLE AT 10.97m. BOREHOLE OPEN AND DRY UPON COMPLETION. BOREHOLE BACKFILLED WITH BENTONITE HOLEPLUG TO SURFACE.				.150														

RECORD OF BOREHOLE No HML-7

1 OF 2

METRIC

G.W.P. 2539-04-00

LOCATION Major Mackenzie Drive to N of Teston Road N 4 858 417.30 E 300 624.78

ORIGINATED BY SLL

HWY 400

BOREHOLE TYPE Solid Stem Augers

COMPILED BY ES

DATUM Geodetic

DATE 2007.11.23 - 2007.11.23

CHECKED BY SKP

SOIL PROFILE			SAMPLES			ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					SHEAR STRENGTH kPa					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES		GROUND WATER CONDITIONS	20	40	60	80	100	○ UNCONFINED	+ FIELD VANE	20	40	60				
245.5																					
0.0	TOPSOIL: (150mm)																				
0.2	Silty CLAY, some sand, trace rootlets Very Stiff to Stiff Brown Moist		1	SS	18																
243.3			2	SS	11																
2.2	Silty CLAY, some sand, trace gravel Very Stiff to Hard Brown Moist (TILL)		3	SS	27																
			4	SS	41																
			5	SS	84/ 275																
			6	SS	82																
			7	SS	54																
			8	SS	40																
	Grey																				

Continued Next Page

+³, ×³: Numbers refer to
Sensitivity

20
15 + 5
10 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No HML-7

2 OF 2

METRIC

G.W.P. 2539-04-00

LOCATION Major Mackenzie Drive to N of Teston Road N 4 858 417.30 E 300 624.78

ORIGINATED BY SLL

HWY 400

BOREHOLE TYPE Solid Stem Augers

COMPILED BY ES

DATUM Geodetic

DATE 2007.11.23 - 2007.11.23

CHECKED BY SKP

SOIL PROFILE			SAMPLES			ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES		GROUND WATER CONDITIONS	20	40	60	80	100	SHEAR STRENGTH kPa	20	40	60	kN/m ³
234.2	Silty CLAY, some sand, trace gravel Very Hard Grey Moist (TILL)	9	9	SS	40	235							○				1 26 51 22
11.3	END OF BOREHOLE AT 11.28m. BOREHOLE BACKFILLED WITH BENTONITE HOLEPLUG TO SURFACE. Piezometer installation consists of 30mm diameter schedule 40 PVC pipe with a 1.52m slotted screen. WATER LEVEL READINGS: DATE DEPTH (m) ELEV. (m) 2008.01.31 FOUND DESTROYED																

RECORD OF BOREHOLE No HML-8

1 OF 2

METRIC

G.W.P. 2539-04-00

LOCATION Major Mackenzie Drive to N of Teston Road N 4 858 798.88 E 300 450.26

ORIGINATED BY SLL

HWY 400

BOREHOLE TYPE Solid Stem Augers

COMPILED BY ES

DATUM Geodetic

DATE 2007.11.19 - 2007.11.19

CHECKED BY SKP

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES		20 40 60 80 100	SHEAR STRENGTH kPa	○ UNCONFINED + FIELD VANE	● QUICK TRIAXIAL X LAB VANE	20 40 60 80 100	20 40 60					
240.4																	
0.0	ASPHALT: (175mm)																
0.2	SAND, trace gravel Compact Brown Moist (FILL)		1	AS									○				
239.1			1	SS	25								○				
1.3	Silty CLAY, some sand, topsoil stained Stiff Dark Brown Moist		2	SS	12								○				0 20 50 30
238.0			3	SS	23								○				
2.4	Silty CLAY, some sand, trace gravel Very Stiff Brown Moist (TILL)		4	SS	21								○				0 19 56 25
	Grey		5	SS	29								○				
	becoming Hard		6	SS	41								○				
			7	SS	82								○				
			8	SS	40								○				

Continued Next Page

+³, ×³: Numbers refer to
Sensitivity 15[±]5₋₅ (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No HML-8

2 OF 2

METRIC

G.W.P. 2539-04-00 LOCATION Major Mackenzie Drive to N of Teston Road N 4 858 798.88 E 300 450.26 ORIGINATED BY SLL
 HWY 400 BOREHOLE TYPE Solid Stem Augers COMPILED BY ES
 DATUM Geodetic DATE 2007.11.19 - 2007.11.19 CHECKED BY SKP

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)			
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			20	40	60	80	100	SHEAR STRENGTH kPa	20	40	60	80	100	WATER CONTENT (%)	kN/m ³
229.1	Silty CLAY, some sand, trace gravel Hard Grey Moist (TILL)	9	SS	48			230						○							
11.3	END OF BOREHOLE AT 11.28m. BOREHOLE OPEN AND DRY UPON COMPLETION. BOREHOLE BACKFILLED WITH BENTONITE HOLEPLUG TO 150mm THEN ASPHALT TO SURFACE.																			

RECORD OF BOREHOLE No HML-9

1 OF 2

METRIC

G.W.P. 2539-04-00

LOCATION Major Mackenzie Drive to N of Teston Road N 4 859 107.83 E 300 393.68

ORIGINATED BY SLL

HWY 400


BOREHOLE TYPE Solid Stem Augers

COMPILED BY ES

DATUM Geodetic

DATE 2007.11.19 - 2007.11.19

CHECKED BY SKP

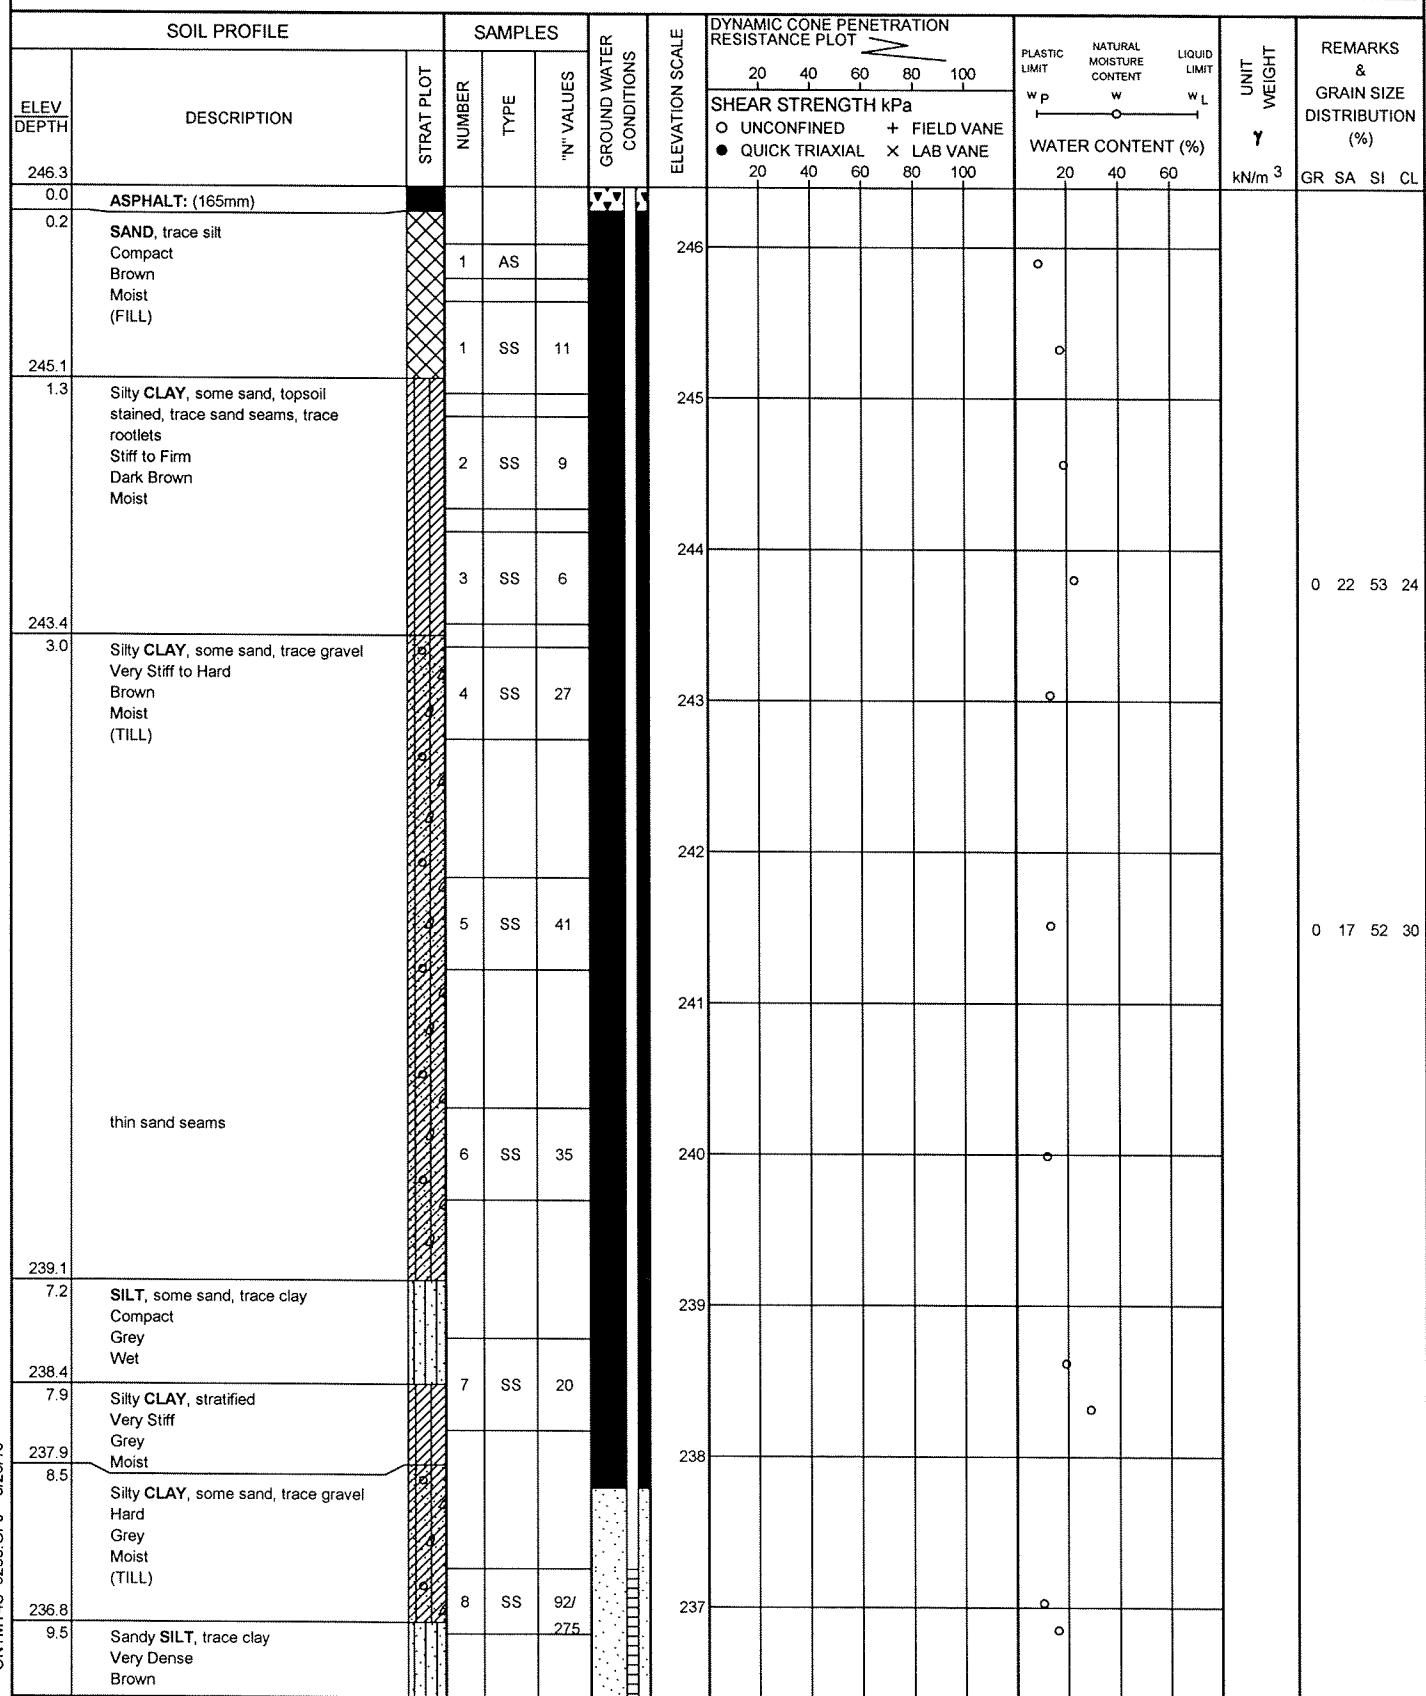

Continued Next Page

$+^3, \times^3:$ Numbers refer to Sensitivity $\frac{20}{15+5} = 10$ (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No HML-9

2 OF 2

METRIC

G.W.P. 2539-04-00 LOCATION Major Mackenzie Drive to N of Teston Road N 4 859 107.83 E 300 393.68 ORIGINATED BY SLL
 HWY 400 BOREHOLE TYPE Solid Stem Augers COMPILED BY ES
 DATUM Geodetic DATE 2007.11.19 - 2007.11.19 CHECKED BY SKP

SOIL PROFILE			SAMPLES			ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W_P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W_L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)			
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES		GROUND WATER CONDITIONS	20	40	60	80	100	SHEAR STRENGTH kPa	○ UNCONFINED + FIELD VANE	● QUICK TRIAXIAL X LAB VANE	20	40	60	kN/m ³
235.1	Sandy SILT, trace clay Very Dense Brown Moist		9	SS	50	236							○					0 29 66 6	
11.3	END OF BOREHOLE AT 11.28m. BOREHOLE BACKFILLED WITH BENTONITE HOLEPLUG TO 150mm THEN CONCRETE TO SURFACE. Piezometer installation consists of 30mm diameter schedule 40 PVC pipe with a 1.52m slotted screen. WATER LEVEL READINGS: DATE DEPTH (m) ELEV. (m) 2008.01.31 COULD NOT BE LOCATED (PRESUMED DESTROYED)																		

Appendix B

Geotechnical Laboratory Test Results


19-92-68



Widening of Hwy 400, Major Mackenzie to King Road
GRAIN SIZE DISTRIBUTION

FIGURE B1

GRAVELLY SAND FILL

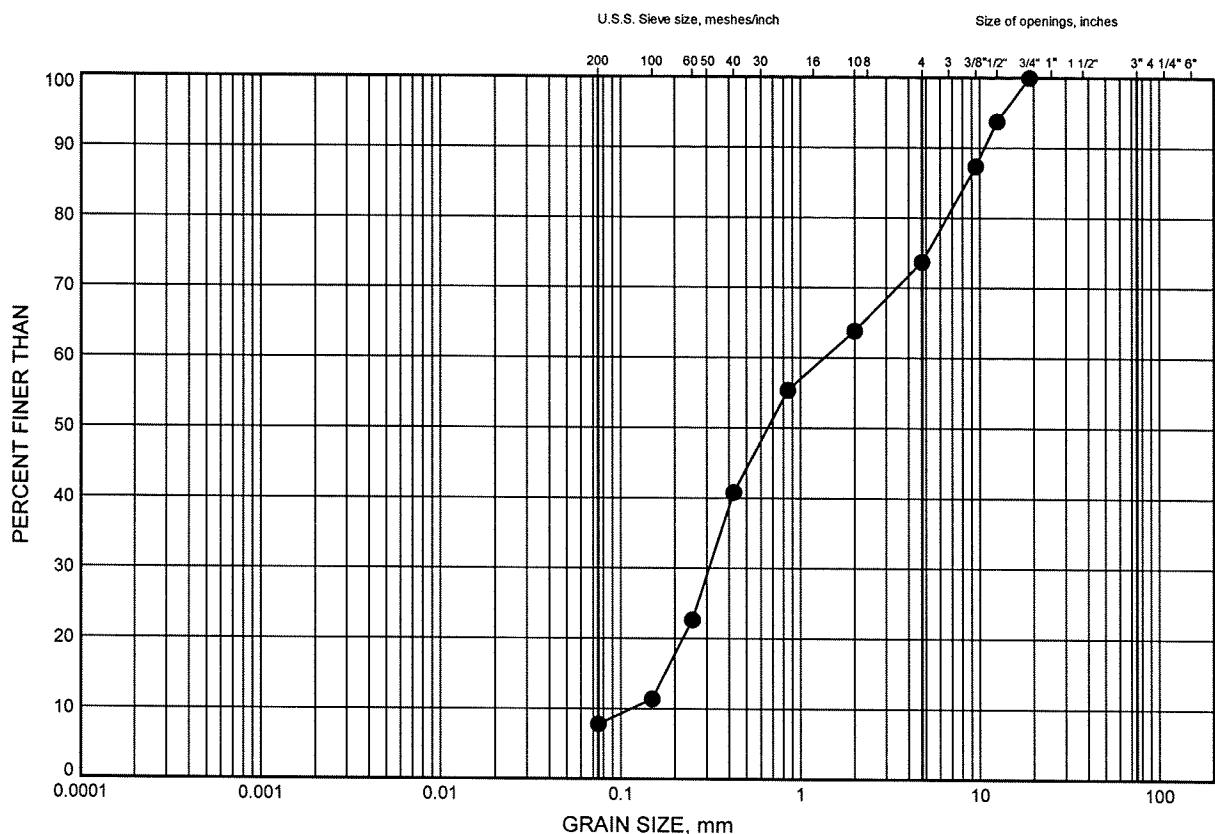


LEGEND

SYMBOL	BOREHOLE	DEPTH (m)	ELEV. (m)
●	HML-1	0.99	232.88

Widening of Hwy 400, Major Mackenzie to King Road
GRAIN SIZE DISTRIBUTION

FIGURE B2

SILTY CLAY FILL

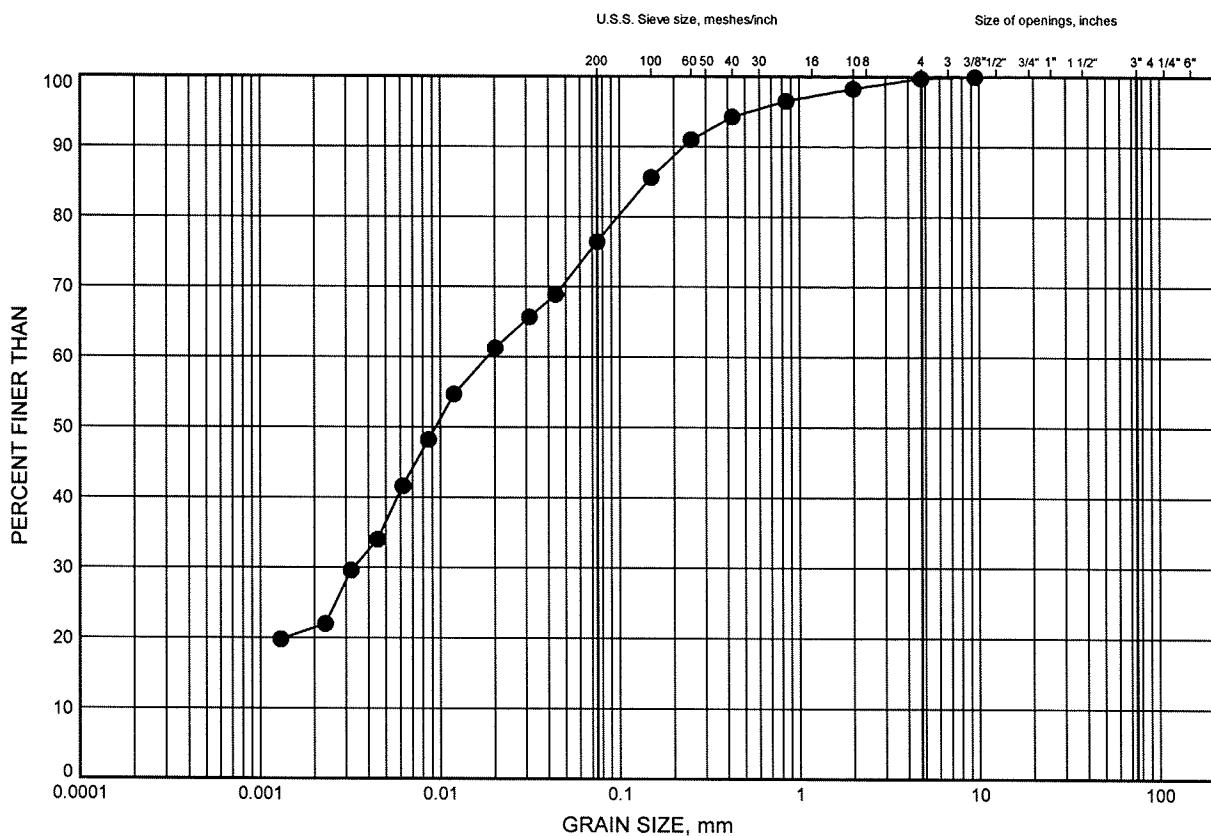

SILT and CLAY	FINE	MEDIUM	COARSE	FINE	COARSE	COBBLE SIZE
FINE GRAINED				SAND		GRAVEL


LEGEND

SYMBOL	BOREHOLE	DEPTH (m)	ELEV. (m)
●	HML-1	1.78	232.09

Widening of Hwy 400, Major Mackenzie to King Road
GRAIN SIZE DISTRIBUTION

FIGURE B3

SILTY CLAY

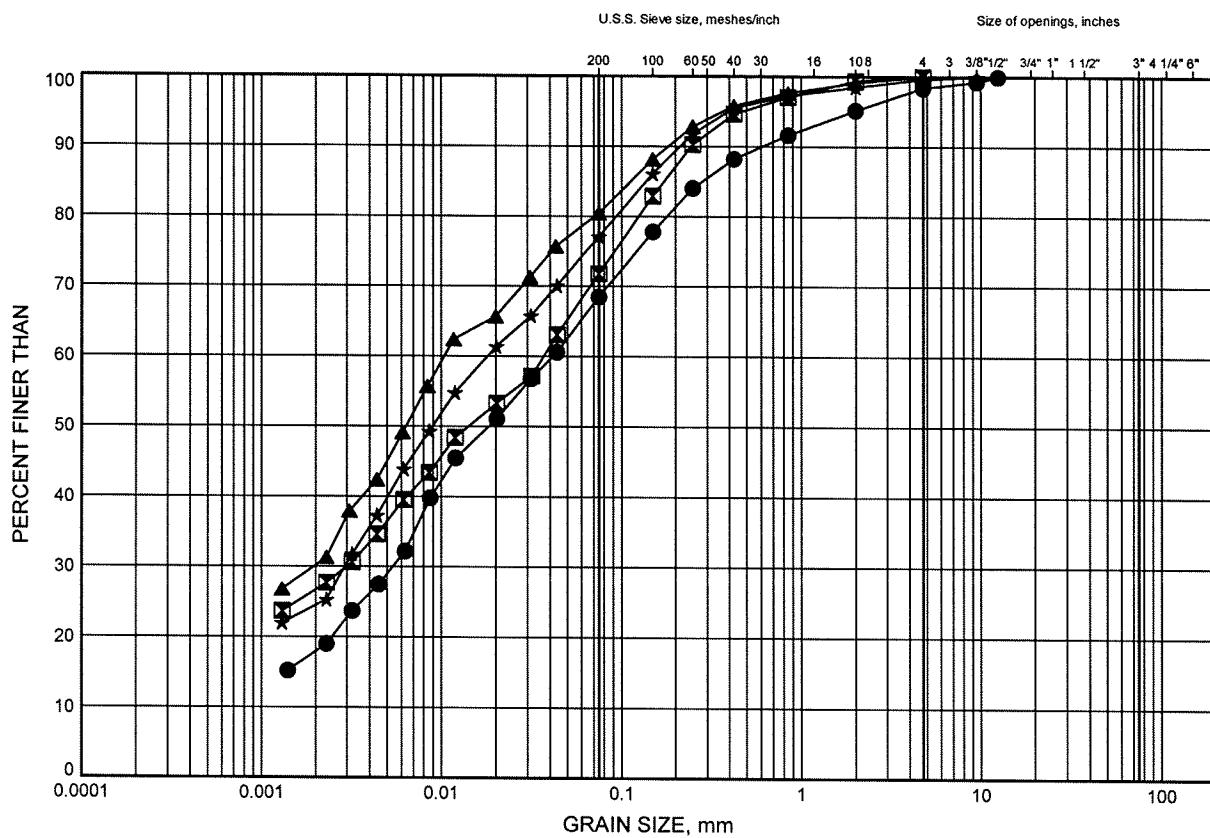

SILT and CLAY	FINE	MEDIUM	COARSE	FINE	COARSE	COBBLE SIZE
FINE GRAINED	SAND			GRAVEL		


LEGEND

SYMBOL	BOREHOLE	DEPTH (m)	ELEV. (m)
●	HML-4	1.07	241.32
■	HML-7	1.83	243.68
▲	HML-8	1.83	238.58
★	HML-9	2.59	243.74

Widening of Hwy 400, Major Mackenzie to King Road
ATTERBERG LIMITS TEST RESULTS

FIGURE B4


SILTY CLAY

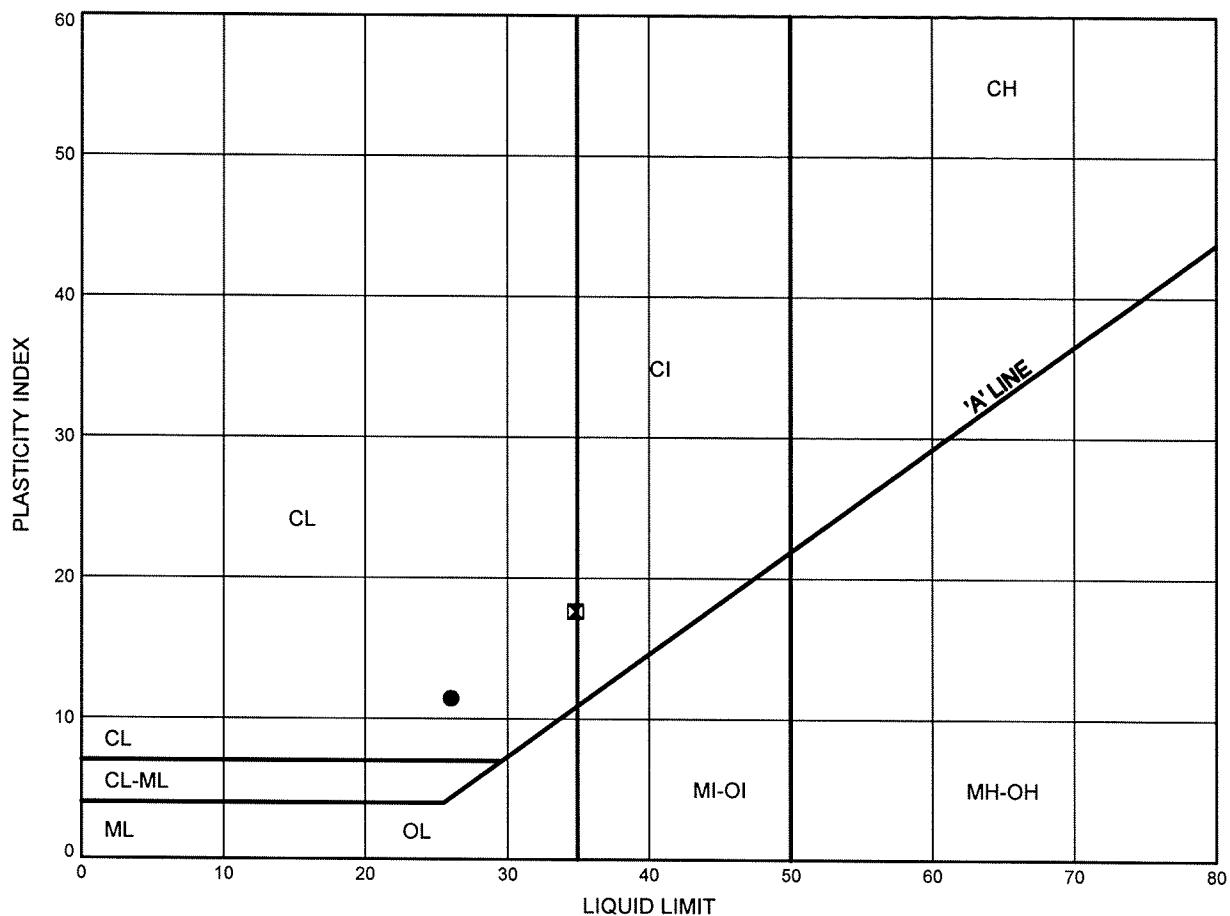

Widening of Hwy 400, Major Mackenzie to King Road
GRAIN SIZE DISTRIBUTION

FIGURE B5

SILTY CLAY TILL

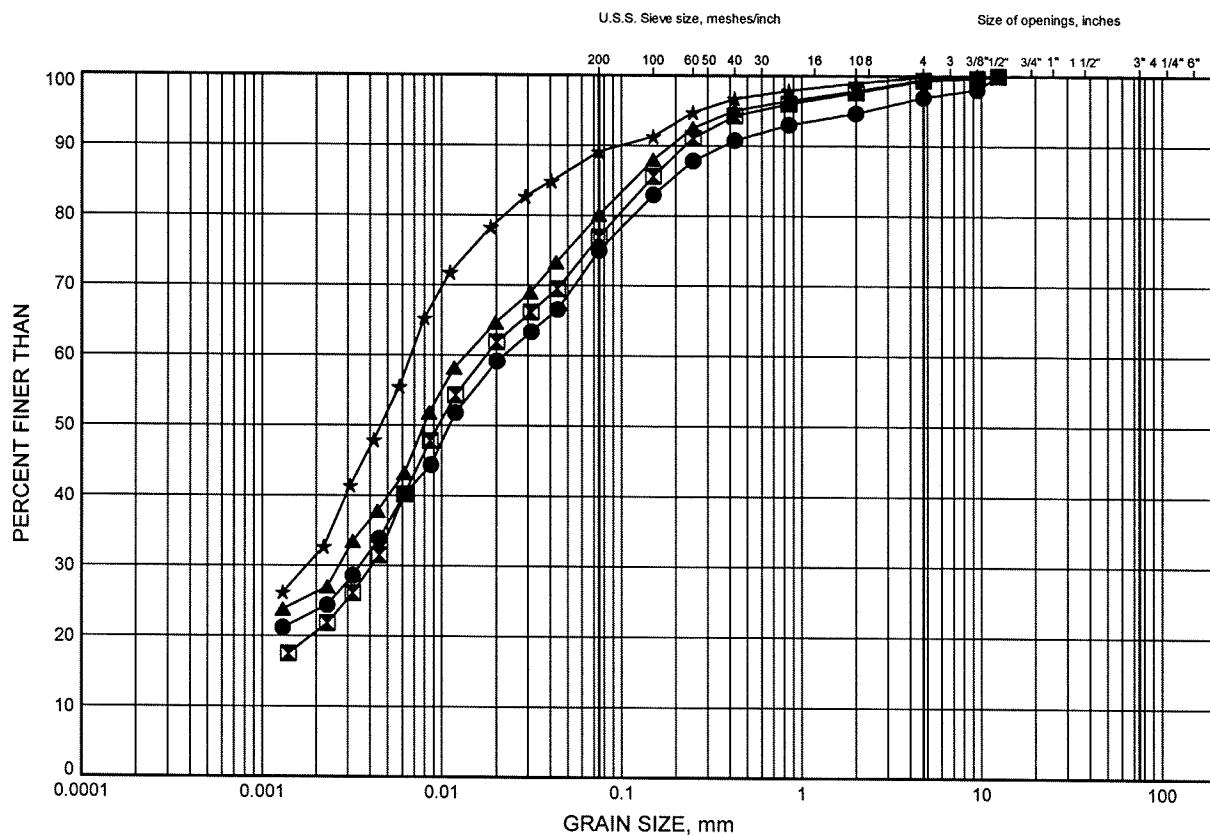

SILT and CLAY	FINE	MEDIUM	COARSE	FINE	COARSE	COBBLE SIZE
FINE GRAINED		SAND			GRAVEL	


LEGEND

SYMBOL	BOREHOLE	DEPTH (m)	ELEV. (m)
●	HML-1	3.35	230.52
◻	HML-1	4.72	229.15
▲	HML-3	3.28	236.79
★	HML-3	7.91	232.16

Widening of Hwy 400, Major Mackenzie to King Road
GRAIN SIZE DISTRIBUTION

FIGURE B6

SILTY CLAY TILL

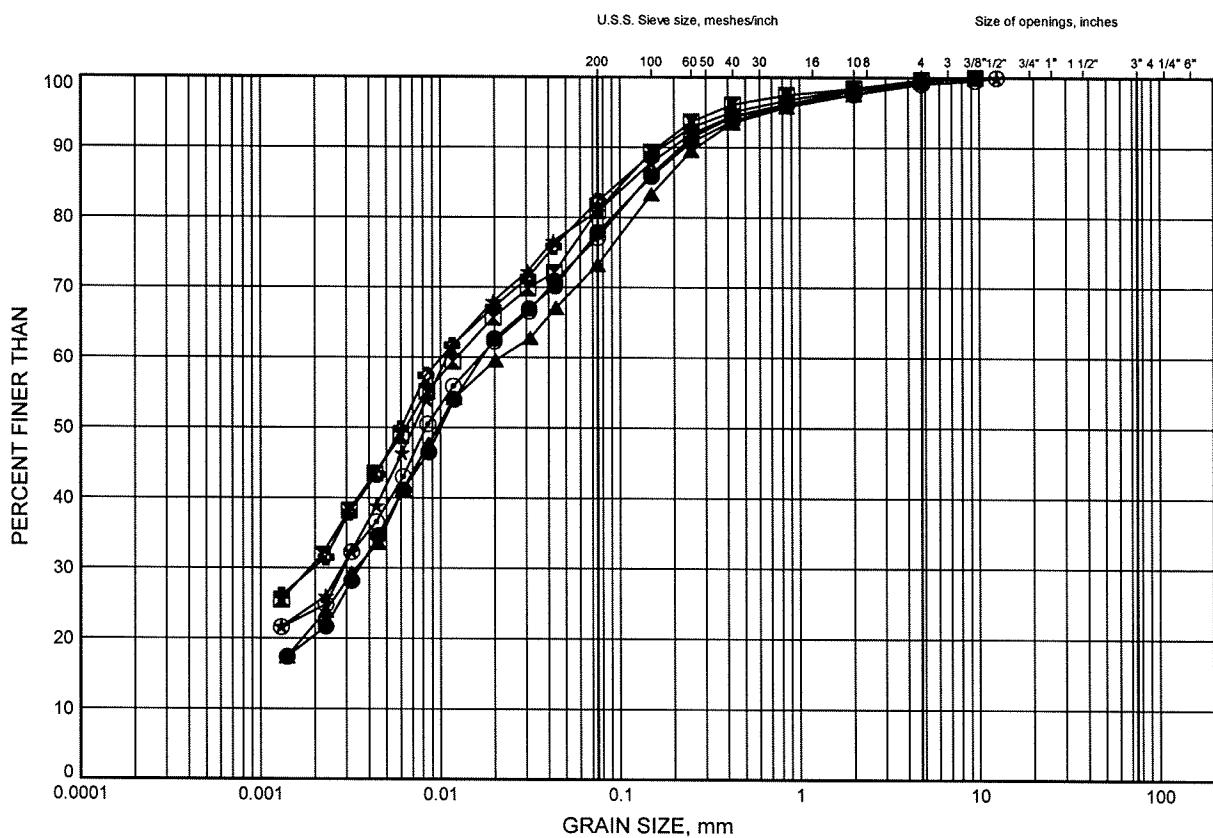

SILT and CLAY	FINE	MEDIUM	COARSE	FINE	COARSE	COBBLE SIZE
FINE GRAINED		SAND		GRAVEL		


LEGEND

SYMBOL	BOREHOLE	DEPTH (m)	ELEV. (m)
●	HML-7	3.35	242.16
■	HML-7	7.92	237.59
▲	HML-7	10.97	234.54
★	HML-8	3.35	237.06
○	HML-8	6.40	234.01
◆	HML-9	4.88	241.45

Widening of Hwy 400, Major Mackenzie to King Road
ATTERBERG LIMITS TEST RESULTS

FIGURE B7

SILTY CLAY TILL

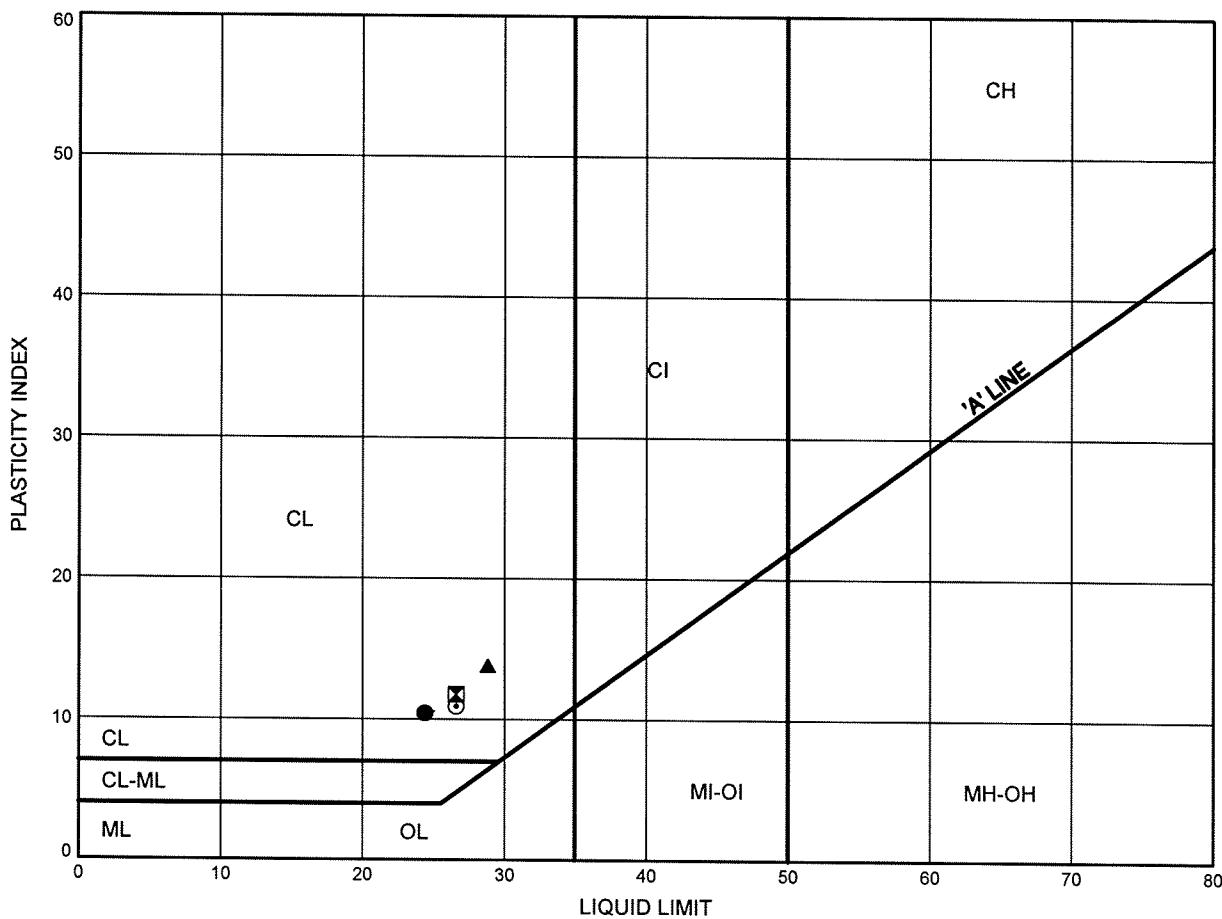


SYMBOL	BH	DEPTH (m)	ELEV. (m)
●	HML-1	3.35	230.52
×	HML-3	3.28	236.79
▲	HML-3	7.91	232.16
★	HML-7	3.35	242.16
○	HML-8	3.35	237.06

Widening of Hwy 400, Major Mackenzie to King Road
GRAIN SIZE DISTRIBUTION

FIGURE B8

SILTY SAND

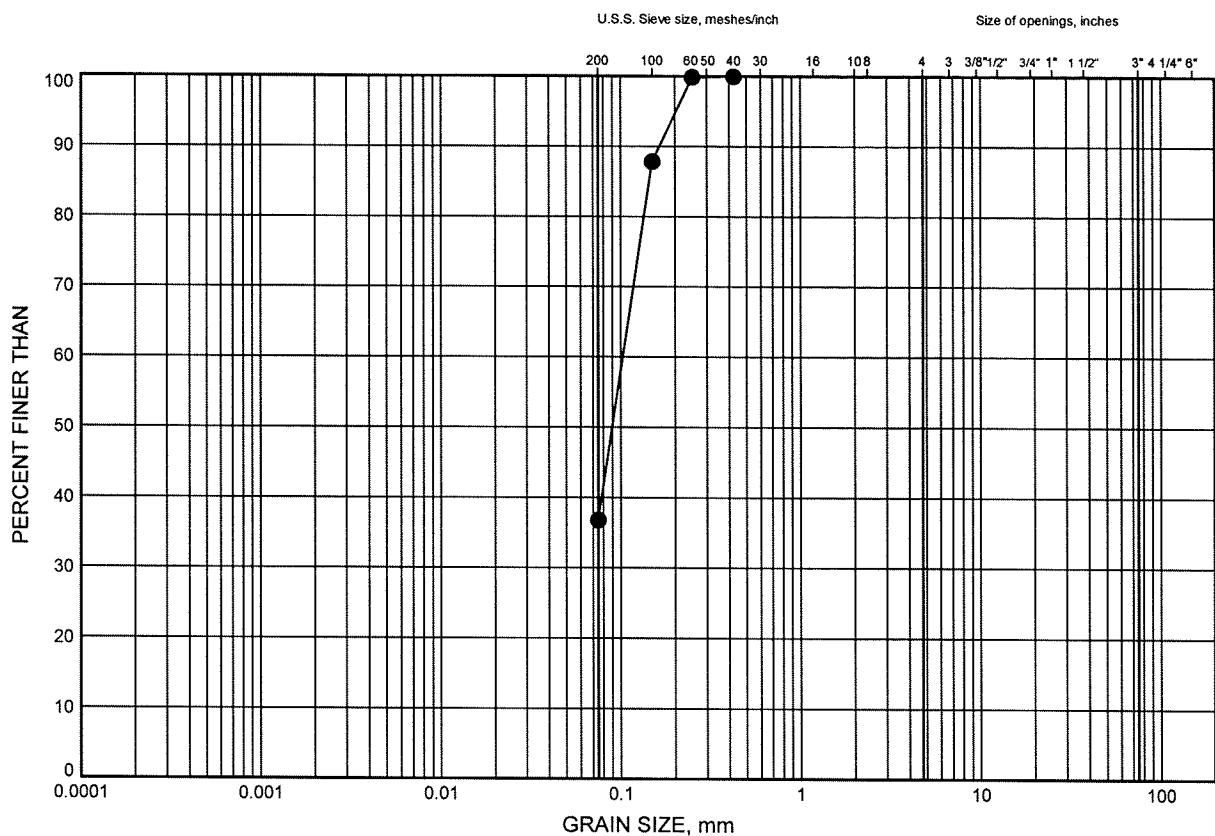

SILT and CLAY	FINE	MEDIUM	COARSE	FINE	COARSE	COBBLE SIZE
FINE GRAINED		SAND			GRAVEL	


LEGEND

SYMBOL	BOREHOLE	DEPTH (m)	ELEV. (m)
●	HML-1	9.36	224.51

Widening of Hwy 400, Major Mackenzie to King Road
GRAIN SIZE DISTRIBUTION

FIGURE B9

SAND

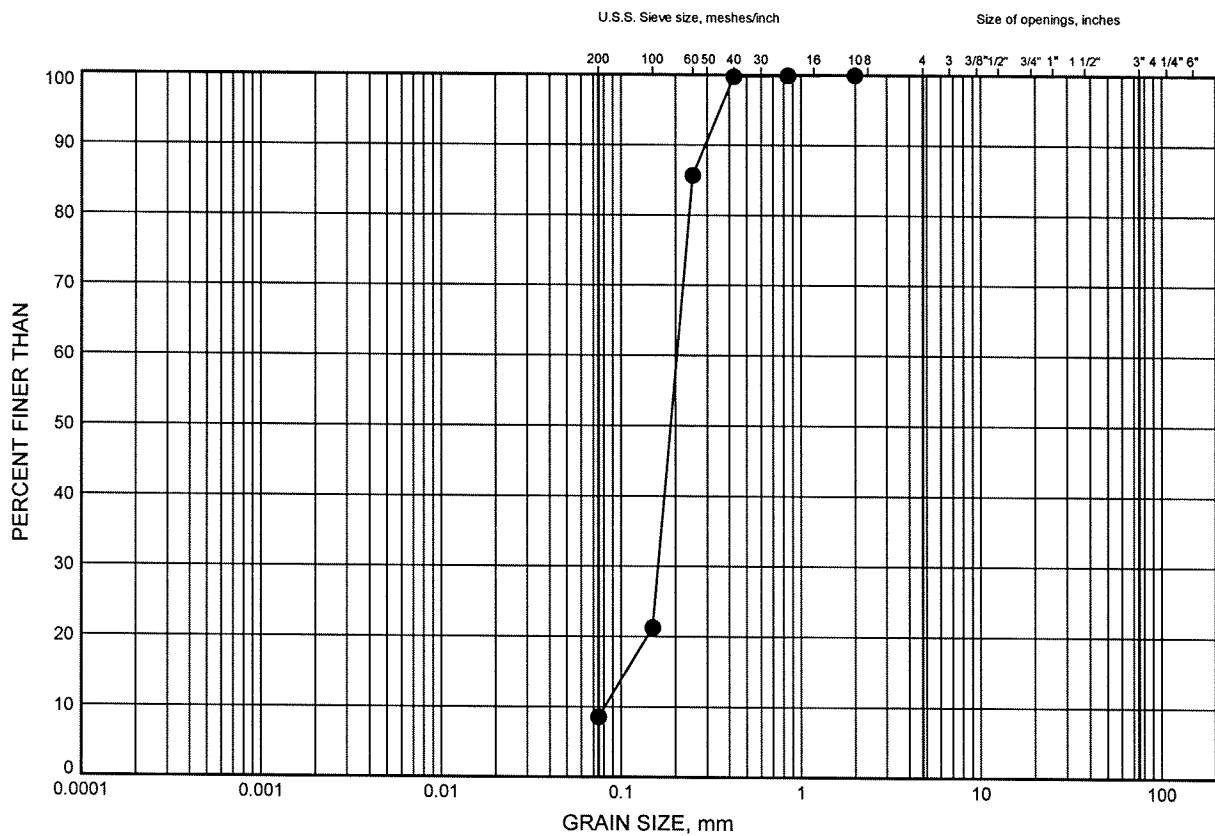


LEGEND

SYMBOL	BOREHOLE	DEPTH (m)	ELEV. (m)
●	HML-5	4.79	236.07

Widening of Hwy 400, Major Mackenzie to King Road
GRAIN SIZE DISTRIBUTION

FIGURE B10

SANDY SILT

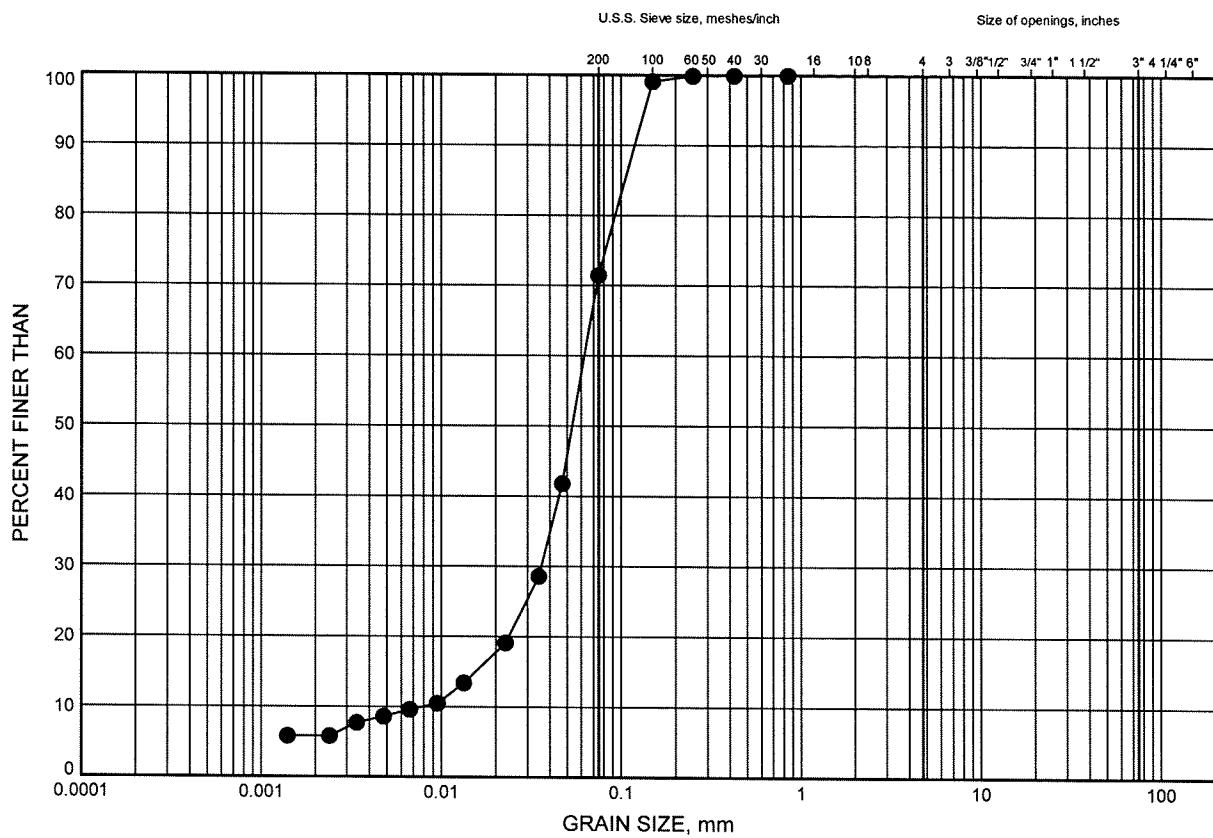

SILT and CLAY	FINE	MEDIUM	COARSE	FINE	COARSE	COBBLE SIZE
FINE GRAINED		SAND			GRAVEL	

LEGEND

SYMBOL	BOREHOLE	DEPTH (m)	ELEV. (m)
●	HML-9	10.97	235.36

High Mast Lighting Poles
Highway 400, Major MacKenzie to North of Teston

Appendix C

Record of Boreholes (Previous Investigations)

19-92-68




RECORD OF BOREHOLE No 06-01E

1 OF 2

METRIC

G.W.P. 2539-04-00	LOCATION Hwy 400, Teston Road to King Road N 4 858 436.64 E 300 547.79	ORIGINATED BY SLL
HWY 400	BOREHOLE TYPE Solid Stem Auger	COMPILED BY MFA
DATUM Geodetic	DATE 2006-12-13 - 2006-12-13	CHECKED BY TJH

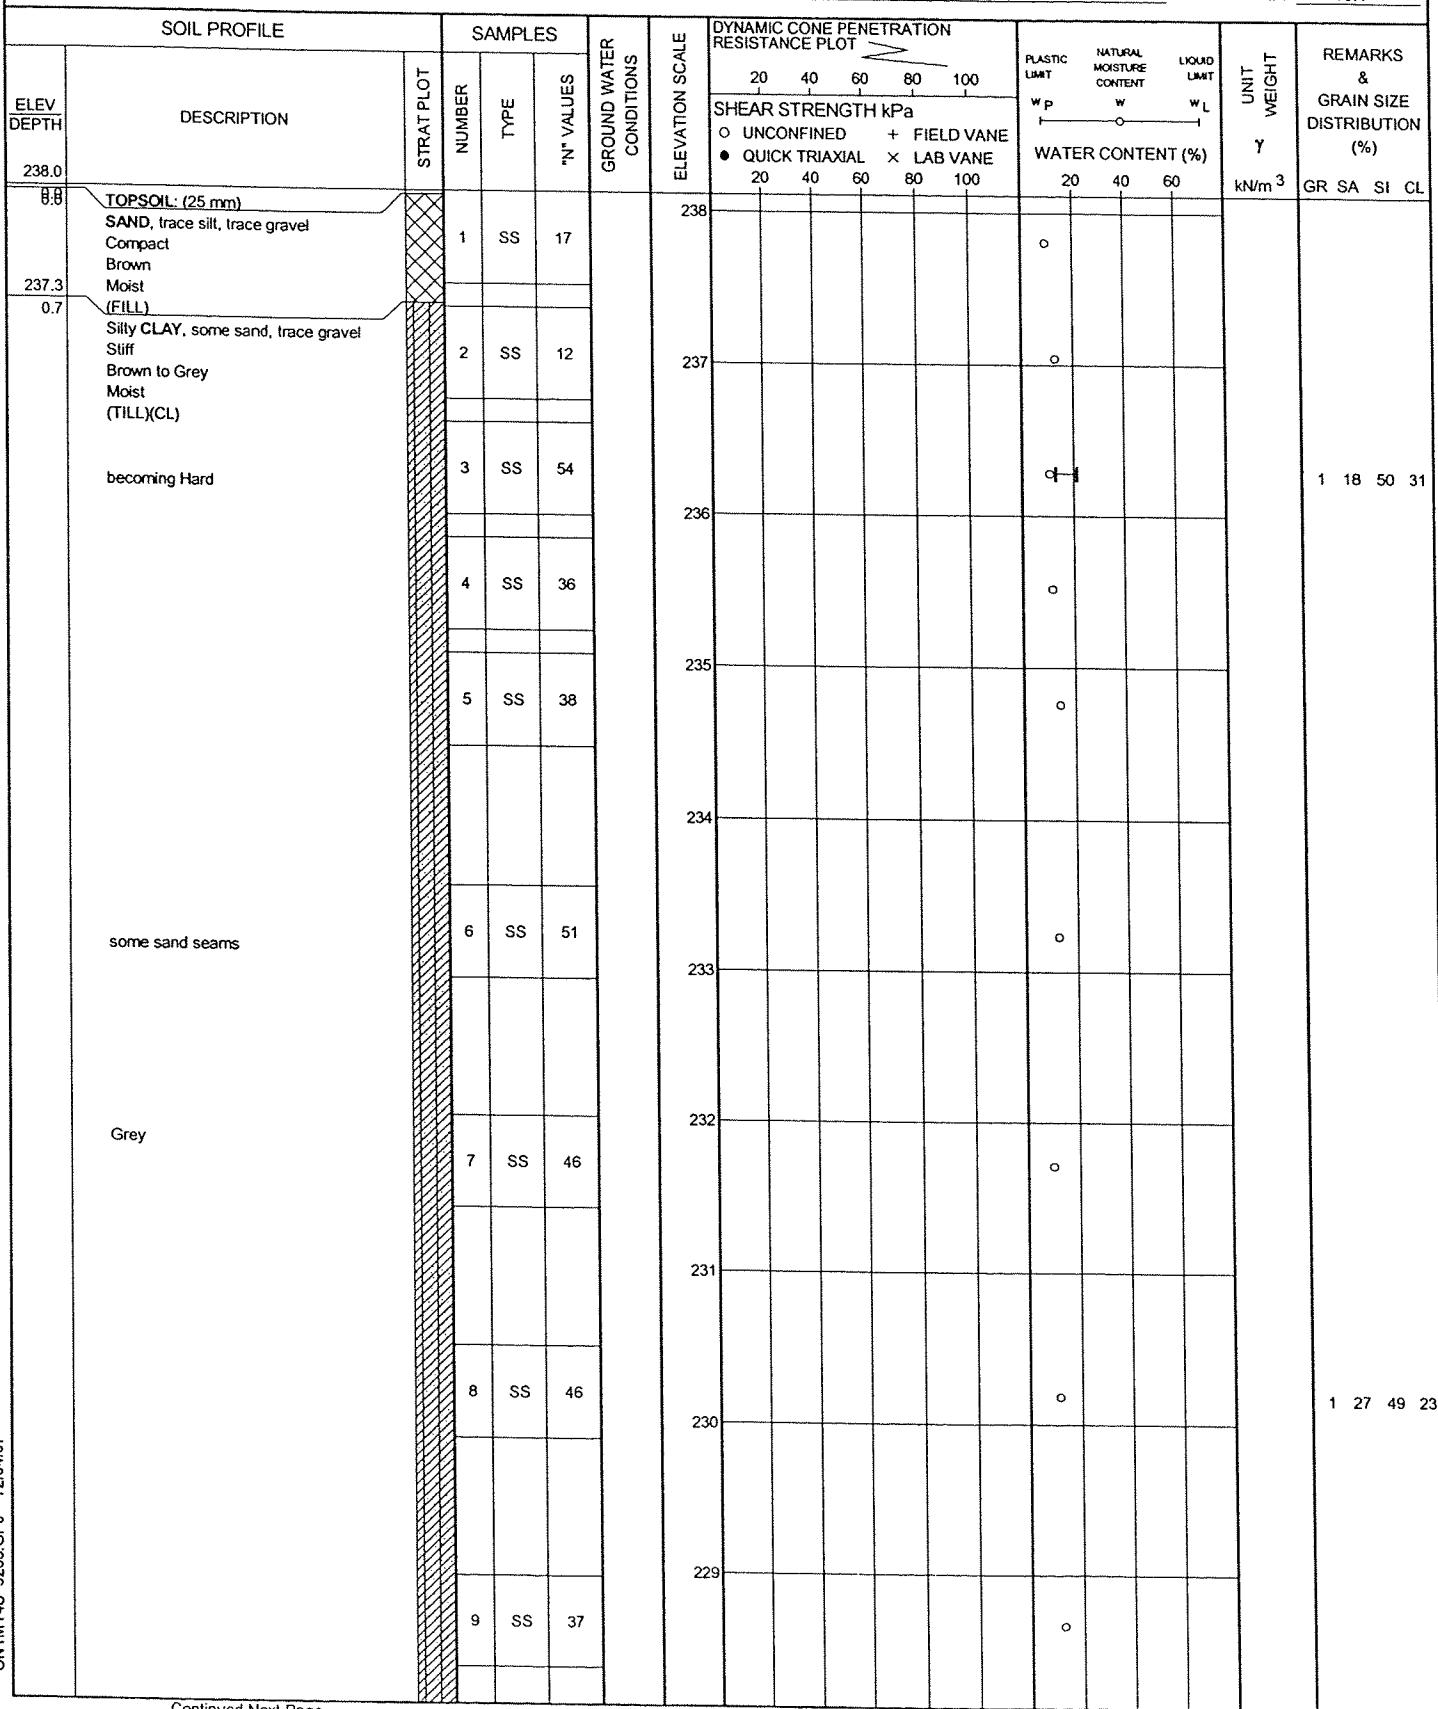

Continued Next Page

+ ³, × ³: Numbers refer to Sensitivity

20
15 \pm 5
10 (%) STRAIN AT FAILURE


RECORD OF BOREHOLE No 06-01E												2 OF 2	METRIC				
G.W.P. 2539-04-00			LOCATION Hwy 400, Teston Road to King Road N 4 858 436.64 E 300 547.79						ORIGINATED BY SLL								
HWY 400			BOREHOLE TYPE Solid Stem Auger						COMPILED BY MFA								
DATUM Geodetic			DATE 2006-12-13 - 2006-12-13						CHECKED BY TJH								
SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			20	40	60	80	100					
227.8	Silty CLAY, some sand, trace gravel Hard																
10.3	SAND, with silt Very Dense Grey Wet																
227.1			10	SS	50/												
11.0	END OF BOREHOLE AT 11.0 m. BOREHOLE OPEN TO 10.31 m AND DRY UPON COMPLETION. BOREHOLE GROUTED WITH BENTONITE TO SURFACE.				150												

RECORD OF BOREHOLE No 06-02E

1 OF 2

METRIC

G.W.P. 2539-04-00 LOCATION Hwy 400, Teston Road to King Road N 4 858 509.65 E 300 536.45 ORIGINATED BY SLL
 HWY 400 BOREHOLE TYPE Solid Stem Auger COMPILED BY MFA
 DATUM Geodetic DATE 2006-12-12 - 2006-12-13 CHECKED BY TJH

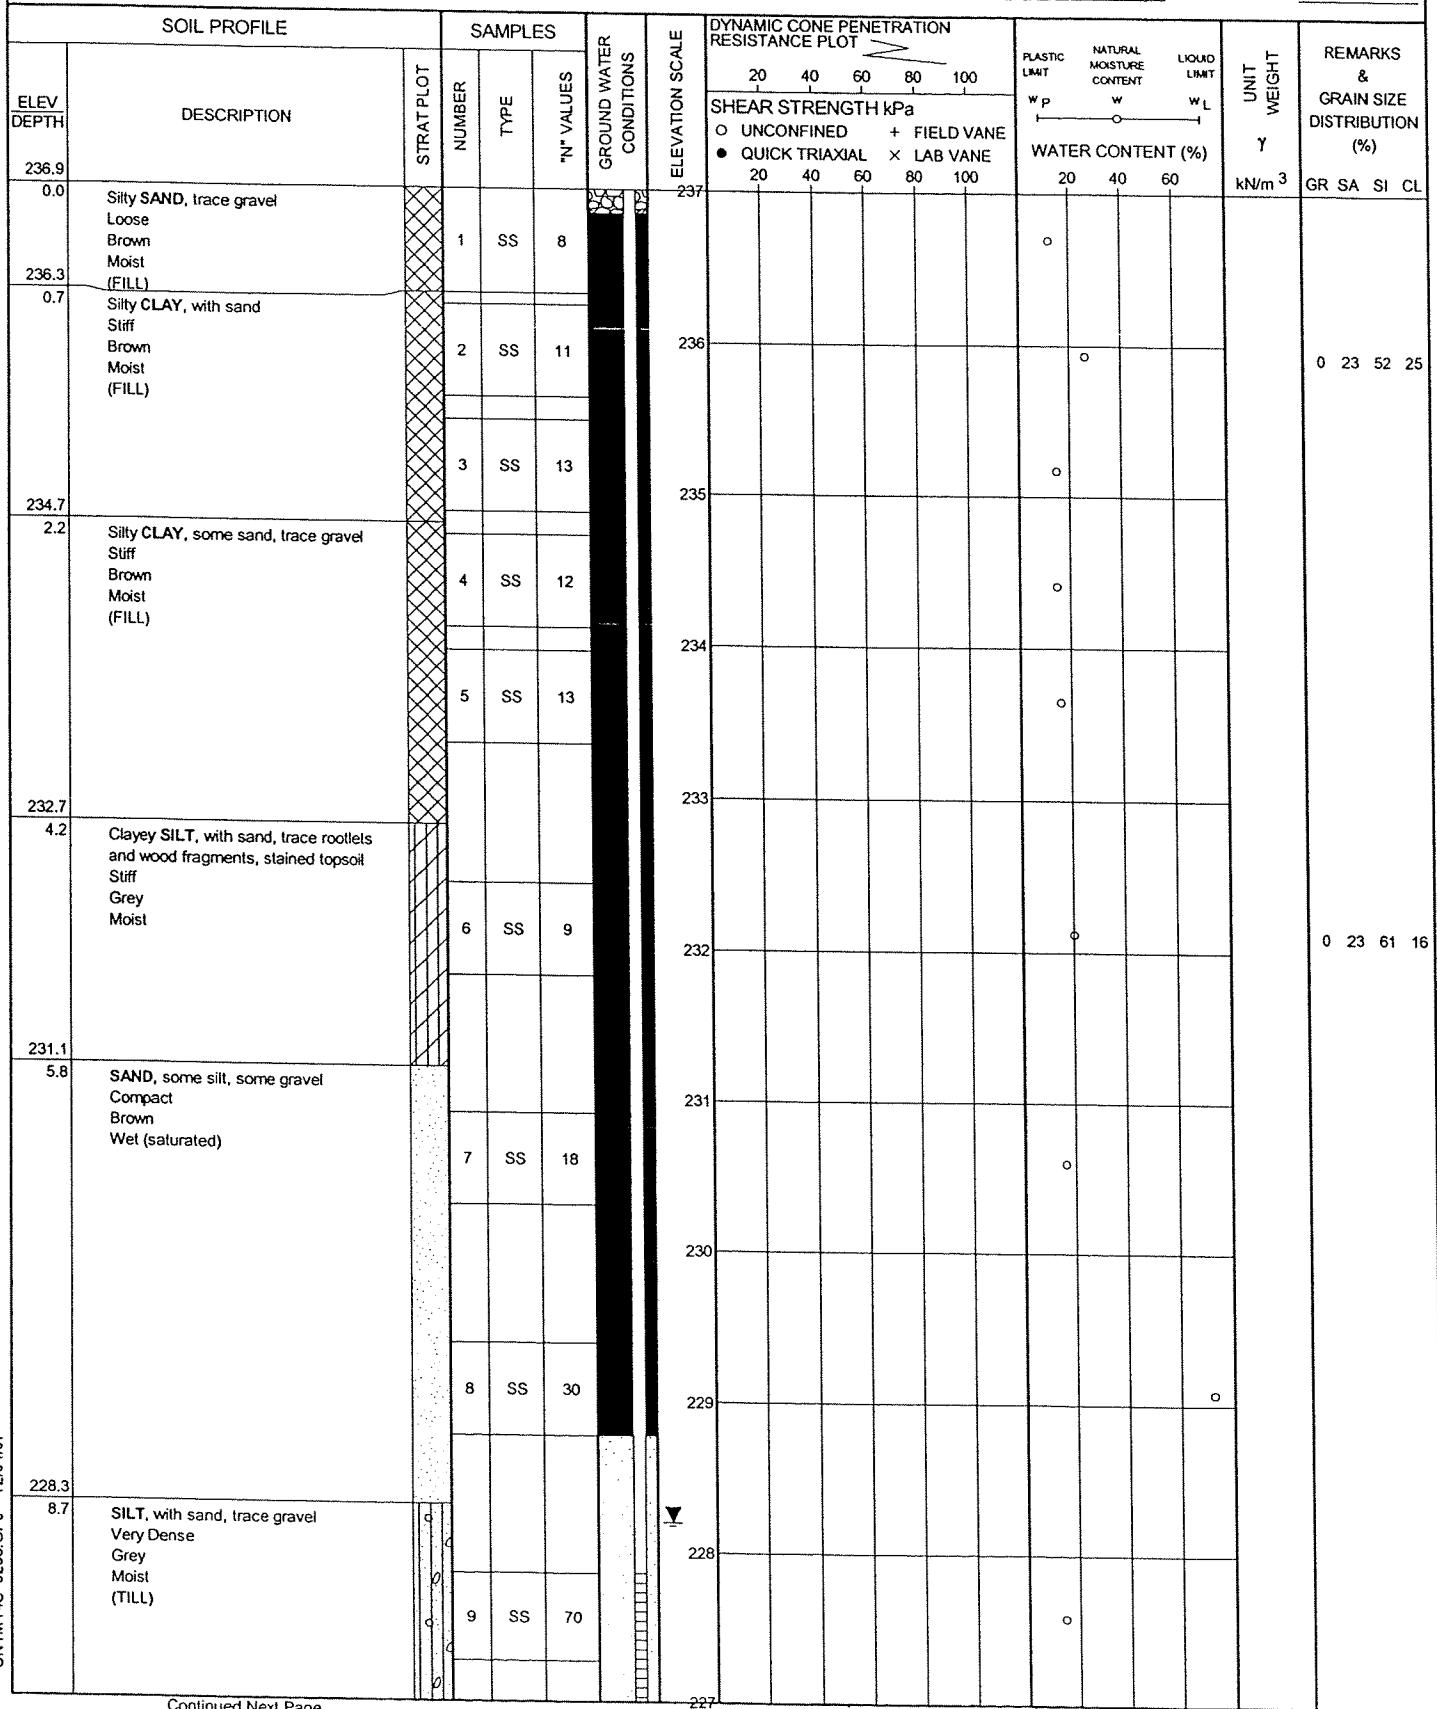

Continued Next Page

+ 3 . X 3 : Numbers refer to Sensitivity

20 15 5 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No 06-02E

2 OF 2

METRIC

G.W.P. 2539-04-00 LOCATION Hwy 400, Teston Road to King Road N 4 858 509.65 E 300 536.45 ORIGINATED BY SLL
 HWY 400 BOREHOLE TYPE Solid Stem Auger COMPILED BY MFA
 DATUM Geodetic DATE 2006-12-12 - 2006-12-13 CHECKED BY TJH

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W_P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W_L	WATER CONTENT (%)	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)	
ELEV	DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	*N VALUES		20 40 60 80 100	SHEAR STRENGTH kPa	20 40 60 80 100	UNCONFINED	FIELD VANE	QUICK TRIAXIAL	LAB VANE					
Continued From Previous Page																			
226.6		SILT, with sand, trace gravel Very Dense (TILL)																	
10.4		Sandy SILT, trace clay Very Dense Grey Moist		10	SS	75													
225.7								226										0 22 69 9	
11.3		END OF BOREHOLE AT 11.28 m. Piezometer installation consists of 19mm diameter Schedule 40 PVC pipe with a 1.52m slotted screen.																	
WATER LEVEL READINGS:																			
DATE			DEPTH(m)			ELEV.(m)			20.02.07 8.9 228.0			27.03.07 8.8 228.1							

RECORD OF BOREHOLE No 06-03E

1 OF 2

METRIC

G.W.P. 2539-04-00 LOCATION Hwy 400, Teston Road to King Road N 4 858 555.19 E 300 528.76 ORIGINATED BY SL

HWY 400 BOREHOLE TYPE Solid Stem Auger COMPILED BY MFA

DATUM Geodetic DATE 2006-12-13 - 2006-12-13 CHECKED BY TJH

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT WP	NATURAL MOISTURE CONTENT W	LIQUID LIMIT WL	WATER CONTENT (%)	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES		20 40 60 80 100	SHEAR STRENGTH kPa	O UNCONFINED + FIELD VANE	● QUICK TRIAXIAL X LAB VANE	20 40 60 80 100						
236.7																	
236.4	TOPSOIL: (50 mm) Silty CLAY Dark Brown Moist (FILL)		1	SS	8								o				
0.3	SAND, trace silt Loose Brown Wet (FILL)		2	SS	16								o				
235.6			3	SS	7								o				
1.1	Silty CLAY, with sand, trace gravel Firm to Stiff Brown Moist (FILL)		4	SS	13								o				
			5	SS	6								o				
232.3																	
4.4	Silty CLAY, with sand, trace gravel, trace rootlets and wood fragments Stiff Dark Brown Moist		6	SS	11								o				
230.6			7	SS	11								o				
6.1	Silty CLAY, some sand Stiff Grey Moist		8	SS	24								o				
229.5	SAND, trace to some gravel, some silt, trace clay Compact Brown Moist to Wet		9	SS	41								o				
228.0													o				
8.7	Silty SAND, trace clay Dense Grey Wet												o				

RECORD OF BOREHOLE No 06-03E

2 OF 2

METRIC

G.W.P. 2539-04-00	LOCATION Hwy 400, Teston Road to King Road N 4 858 555.19 E 300 528.76	ORIGINATED BY SLL
HWY 400	BOREHOLE TYPE Solid Stem Auger	COMPILED BY MFA
DATUM Geodetic	DATE 2006-12-13 - 2006-12-13	CHECKED BY TJH

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W_P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W_L	WATER CONTENT (%)	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES		20 40 60 80 100	SHEAR STRENGTH kPa	○ UNCONFINED + FIELD VANE	● QUICK TRIAXIAL X LAB VANE	20 40 60 80 100							
225.4	Silty SAND, trace clay Dense Grey Wet					226												
11.3	END OF BOREHOLE AT 11.28 m. BOREHOLE OPEN TO 6.18 m UPON COMPLETION. BOREHOLE GROUTED WITH BENTONITE TO SURFACE.		10	SS	37													
	WATER LEVEL READINGS: DATE DEPTH(m) ELEV.(m) 13.12.06 3.1 233.6																	

RECORD OF BOREHOLE No 06-30E

1 OF 2

METRIC

G.W.P. 2539-04-00

LOCATION Hwy 400, Teston Road to King Road N 4 858 670.49 E 300 523.55

ORIGINATED BY SLL

HWY 400


BOREHOLE TYPE Solid Stem Auger

COMPILED BY MFA

DATUM Geodetic

DATE 2006-12-12 - 2006-12-12

CHECKED BY TJH

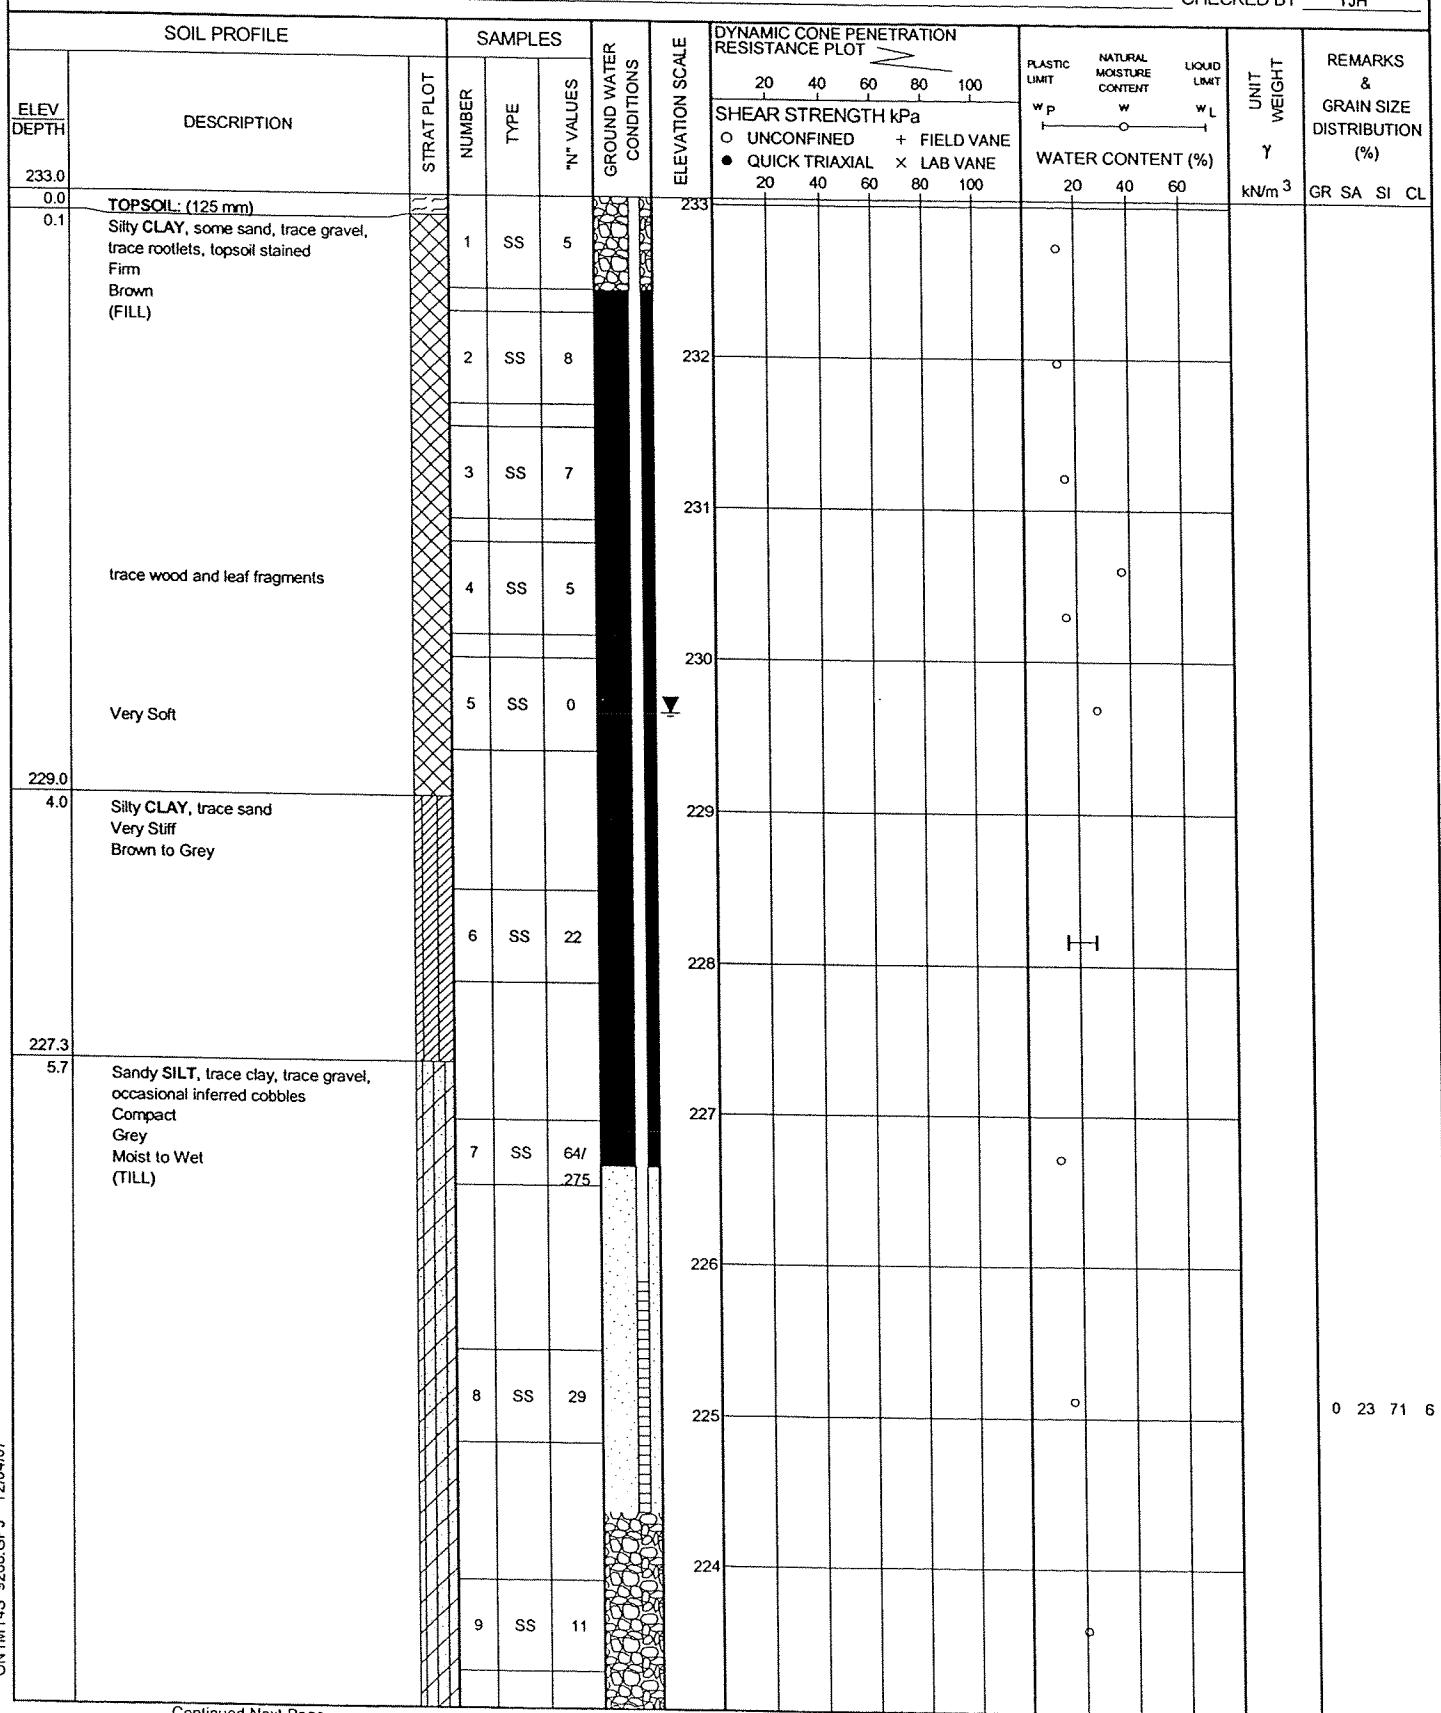

Continued Next Page

+³, ×³: Numbers refer to
Sensitivity

20
15 + 5
10 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No 06-30E

2 OF 2

METRIC

G.W.P. 2539-04-00

LOCATION Hwy 400, Teston Road to King Road N 4 858 670.49 E 300 523.55

ORIGINATED BY SLL

HWY 400

BOREHOLE TYPE Solid Stem Auger

COMPILED BY MFA

DATUM Geodetic

DATE 2006-12-12 - 2006-12-12

CHECKED BY TJH

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W_P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W_L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	N' VALUES		20 40 60 80 100	SHEAR STRENGTH kPa	○ UNCONFINED + FIELD VANE	● QUICK TRIAXIAL X LAB VANE	20 40 60 80 100						
222.0	Sandy SILT, trace clay, trace gravel, occasional inferred cobbles Compact Grey Moist to Wet (TILL)	██████	10	SS	50/ .150	223							○				
11.0	END OF BOREHOLE AT 10.97 m. Piezometer installation consists of 19mm diameter Schedule 40 PVC pipe with a 1.52m slotted screen.																

WATER LEVEL READINGS:

DATE	DEPTH(m)	ELEV.(m)
20.02.07	3.5	229.5
27.03.07	3.4	229.6

RECORD OF BOREHOLE No 06-31E

1 OF 2

METRIC

G.W.P. 2539-04-00	LOCATION Hwy 400, Teston Road to King Road N 4 858 705.10 E 300 508.88	ORIGINATED BY SLL
HWY 400	BOREHOLE TYPE Solid Stem Auger	COMPILED BY MFA
DATUM Geodetic	DATE 2006-12-12 - 2006-12-12	CHECKED BY TJH

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W_P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W_L	WATER CONTENT (%)	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	'N' VALUES			20 40 60 80 100	SHEAR STRENGTH kPa	O UNCONFINED + FIELD VANE	● QUICK TRIAXIAL X LAB VANE	20 40 60 80 100							
238.2																			
0.0																			
0.1	TOPSOIL: (100 mm) Silty CLAY, trace gravel and sand seams, trace rootlets, topsoil stained Firm Brown Moist	██████████	1	SS	6		238							o					
			2	SS	6		237							o					
236.8			3	SS	20		236							4-1					
1.4	Silty CLAY, some sand, trace gravel Very Stiff to Hard Brown Moist (TILL)(CL)	██████████	4	SS	21		235							o					1 19 56 24
			5	SS	27		234							o					
			6	SS	33		233							o					
			7	SS	30		232							o					
			8	SS	24		231							o					
	becoming Grey	██████████	9	SS	27		230							o					2 14 52 32
							229							o					
																			1 20 54 25

Continued Next Page

+ 3 . × 3 : Numbers refer to
Sensitivity

20 15+5 10 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No 06-31E

2 OF 2

METRIC

G.W.P. 2539-04-00	LOCATION Hwy 400, Teston Road to King Road N 4 858 705.10 E 300 508.88	ORIGINATED BY SLL
HWY 400	BOREHOLE TYPE Solid Stem Auger	COMPILED BY MFA
DATUM Geodetic	DATE 2006-12-12 - 2006-12-12	CHECKED BY TJH

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W_P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W_L	WATER CONTENT (%)	UNIT WEIGHT Y	REMARKS & GRAIN SIZE DISTRIBUTION (%)	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES		20 40 60 80 100	SHEAR STRENGTH kPa	○ UNCONFINED + FIELD VANE	● QUICK TRIAXIAL X LAB VANE	20 40 60 80 100							
227.4	Silty CLAY, some sand, trace gravel Very Stiff to Hard Brown Moist (TILL)(CL)					228												
10.8	SAND, with silt Compact Grey		10	SS	29													
226.9																		
11.3	END OF BOREHOLE AT 11.28 m. BOREHOLE OPEN UPON COMPLETION. BOREHOLE GROUTED WITH BENTONITE AND BACKFILLED WITH AUGER CUTTINGS TO SURFACE.					227												
WATER LEVEL READINGS: DATE DEPTH(m) ELEV.(m) 12.12.06 6.7 231.5																		

RECORD OF BOREHOLE No 06-04W

1 OF 1

METRIC

G.W.P. 2539-04-00 LOCATION Hwy 400, Teston Road to King Road N 4 859 096.28 E 300 383.52 ORIGINATED BY BJ
 HWY 400 BOREHOLE TYPE Solid Stem Auger COMPILED BY MFA
 DATUM Geodetic DATE 2006-12-15 - 2006-12-15 CHECKED BY TJH

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	WATER CONTENT (%)	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL	
ELEV DEPTH	DESCRIPTION	STRAIT PLOT	NUMBER	TYPE	"N" VALUES		20 40 60 80 100	SHEAR STRENGTH kPa	● UNCONFINED + FIELD VANE	20 40 60 80 100								
246.1																		
0.0	Clayey TOPSOIL: (150 mm)																	
0.2	Silty CLAY, some sand, trace gravel Firm to Stiff Brown (TILL)(CL)	██████████	1	SS	6													0 18 53 29
	Hard		2	SS	9													
243.8			3	SS	46													
2.3	Sandy SILT, some clay, trace gravel, some iron oxide staining Very Dense (TILL)	██████████	4	SS	40/.125													
			5	SS	63													
241.7																		
4.3	SILT, some sand, some clay (TILL)	○○○○○○	6	SS	62													0 14 75 11
240.0																		
6.1	Silty CLAY, trace sand, trace gravel Hard (TILL)	██████████	7	SS	38													
			8	SS	30													
237.8																		
8.2	END OF BOREHOLE AT 8.2m. BOREHOLE GROUTED WITH BENTONITE TO SURFACE.																	

RECORD OF BOREHOLE No 06-05W

1 OF 1

METRIC

G.W.P. 2539-04-00

LOCATION Hwy 400, Teston Road to King Road N 4 859 131.21 E 300 359.10

ORIGINATED BY SLL

HWY 400

BOREHOLE TYPE Solid Stem Auger

COMPILED BY MFA

DATUM Geodetic

DATE 2007-02-05 - 2007-02-05

CHECKED BY TJH

SOIL PROFILE

SAMPLES

DYNAMIC CONE PENETRATION
RESISTANCE PLOT

20 40 60 80 100

SHEAR STRENGTH kPa

○ UNCONFINED + FIELD VANE
● QUICK TRIAXIAL X LAB VANE

20 40 60 80 100

PLASTIC
LIMIT

w_P

NATURAL
MOISTURE
CONTENT

w

LIQUID
LIMIT

w_L

WATER CONTENT (%)

20 40 60

UNIT
WEIGHT

γ

kN/m³

REMARKS
&
GRAIN SIZE
DISTRIBUTION
(%)

GR SA SI CL

ELEV. DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES	GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT	PLASTIC LIMIT	NATURAL MOISTURE CONTENT	LIQUID LIMIT	WATER CONTENT (%)	UNIT WEIGHT	REMARKS & GRAIN SIZE DISTRIBUTION (%)	
240.9															
0.0	TOPSOIL: (100mm) Silty CLAY, with sand, some sand seams Stiff to Very Stiff Dark Brown Moist (TILL)(CL)		1	SS	8										
0.1			2	SS	17										
			3	SS	27										
237.9			4	SS	34										
3.0	Sandy SILT, trace clay Compact to Dense Brown Moist (TILL)		5	SS	26										
			6	SS	25										
232.6			7	SS	34										
8.2	END OF BOREHOLE AT 8.23m BOREHOLE CAVED TO 5.39m. BOREHOLE BACKFILLED WITH HOLEPLUG UPON COMPLETION.														
	WATER LEVEL READINGS: DATE DEPTH(m) ELEV.(m) 05.02.07 5.0 235.9														

RECORD OF BOREHOLE No 06-06W

1 OF 1

METRIC

G.W.P. 2539-04-00

LOCATION Hwy 400, Teston Road to King Road N 4 859 182.79 E 300 352.51

ORIGINATED BY SLL

HWY 400

BOREHOLE TYPE Solid Stem Auger

COMPILED BY MFA

DATUM Geodetic

DATE 2007-02-05 - 2007-02-05

CHECKED BY TJH


SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT WP	NATURAL MOISTURE CONTENT W	LIQUID LIMIT WL	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			20 40 60 80 100	SHEAR STRENGTH kPa	20 40 60 80 100	20 40 60	WATER CONTENT (%)					
249.5																	
0.0	TOPSOIL: (100mm) Silty CLAY, with sand, trace gravel Stiff Brown Moist (TILL)(CL)																
0.1	Very Stiff to Hard trace gravel		1	SS	8		249										
			2	SS	9		248										
			3	SS	23		247										
			4	SS	33		246										
			5	SS	85		245										
			6	SS	51		244										
243.0																	
242.6	SAND LAYER: (125mm) Silty CLAY, with sand, trace gravel (TILL)																
6.7																	
			7	SS	28		243										
241.3																	
8.2	END OF BOREHOLE AT 8.23m. Piezometer installation consists of 19mm diameter Schedule 40 PVC pipe with a 1.52m slotted screen.																
	WATER LEVEL READINGS: DATE DEPTH(m) ELEV.(m)																
	20.02.07 6.5 243.0																
	27.03.07 5.8 243.7																

RECORD OF BOREHOLE No 04-1

1 OF 2

METRIC

G.W.P. LOCATION Hwy 400 / Teston Road ORIGINATED BY GA
 HWY 400 BOREHOLE TYPE Hollow Stem Augers COMPILED BY WMSS
 DATUM Geodetic DATE 2004.02.23 - 2004.02.23 CHECKED BY SMS

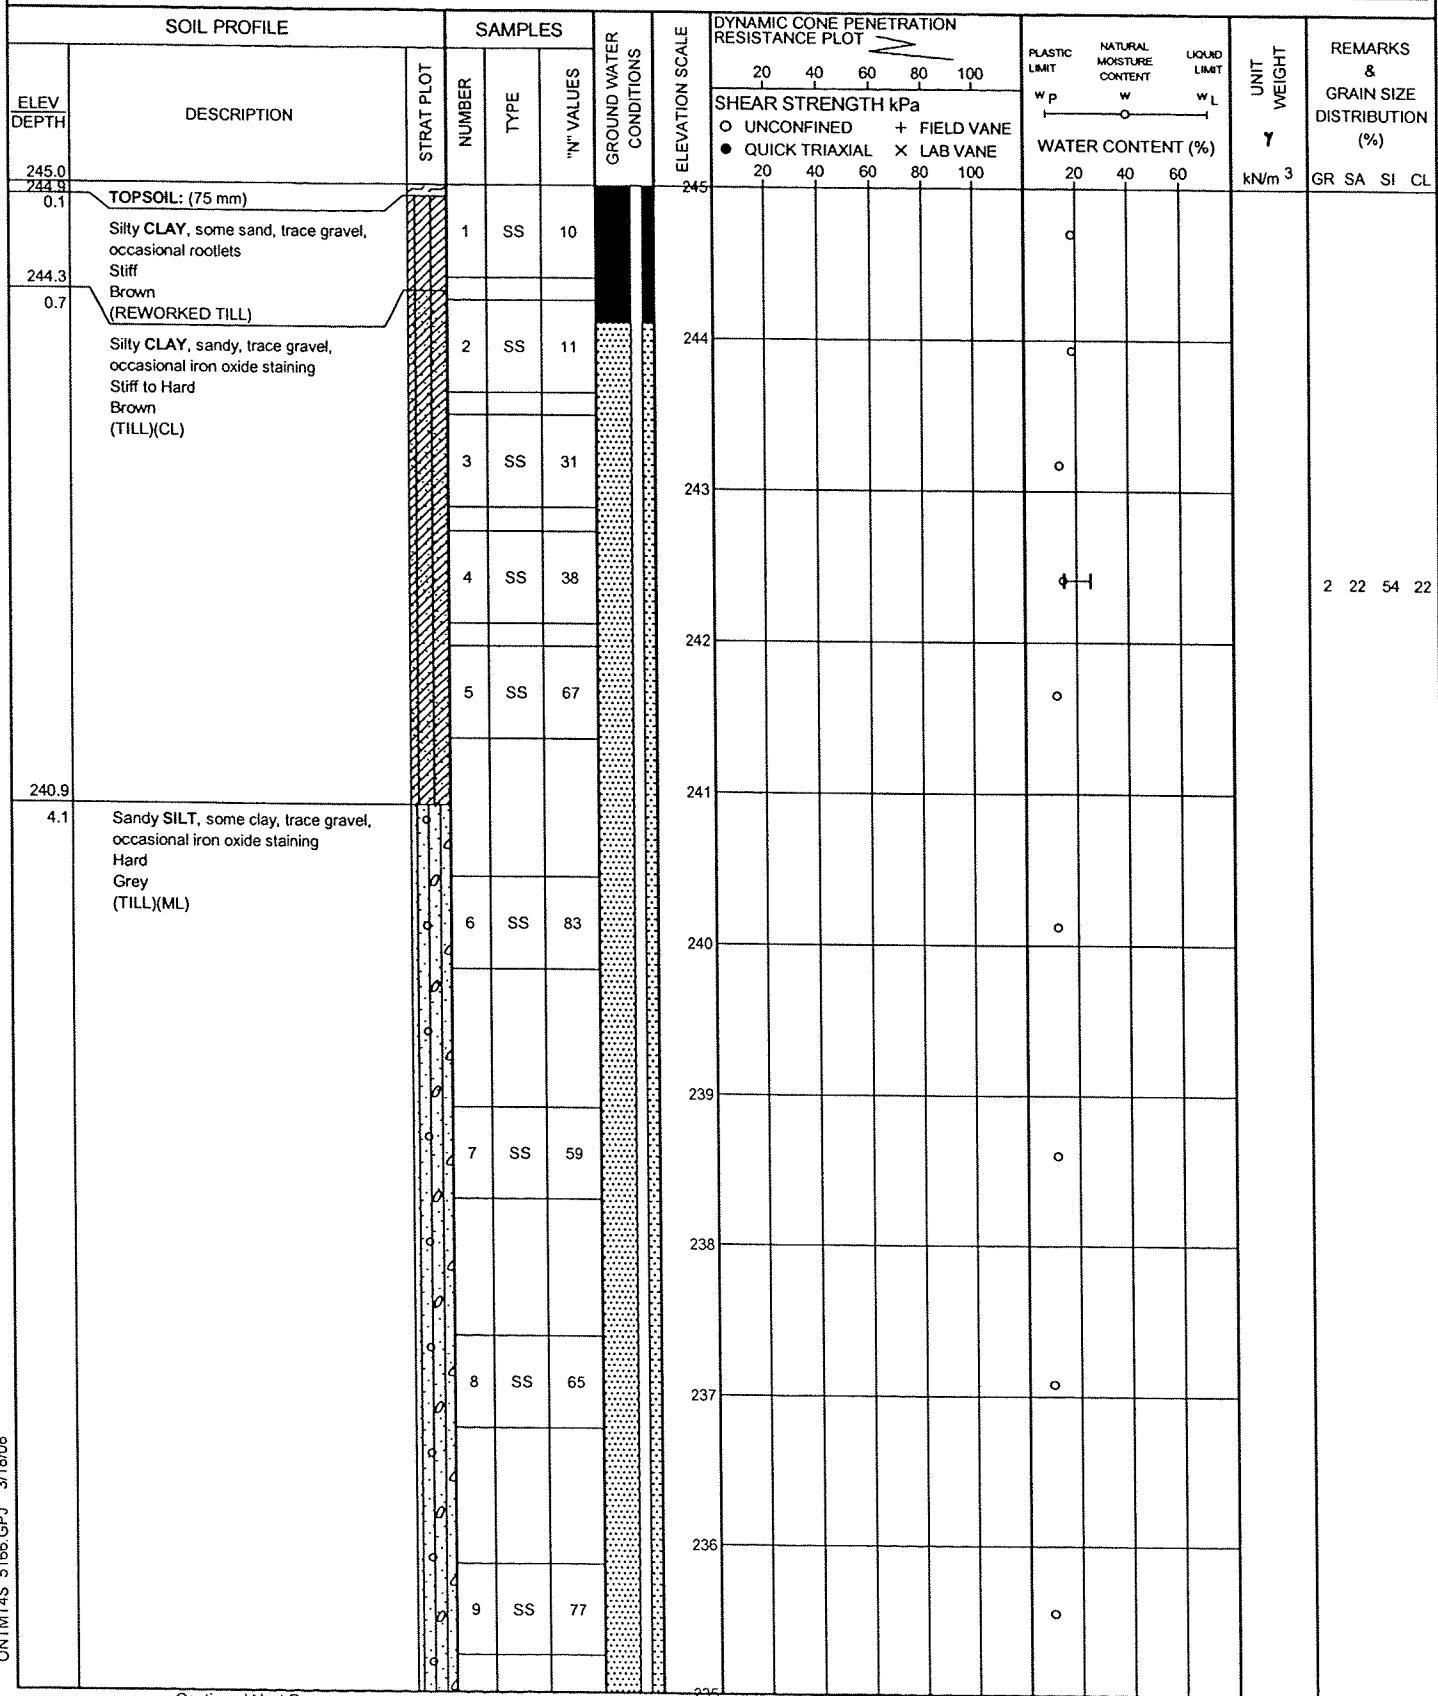

Continued Next Page

+³, X³: Numbers refer to Sensitivity 15²⁰₁₀ (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No 04-1

2 OF 2

METRIC

G.W.P. _____ LOCATION Hwy 400 / Teston Road ORIGINATED BY GA
 HWY 400 BOREHOLE TYPE Hollow Stem Augers COMPILED BY WM/SS
 DATUM Geodetic DATE 2004.02.23 - 2004.02.23 CHECKED BY SMS


SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W_P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W_L	WATER CONTENT (%)	UNIT WEIGHT Y	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			20 40 60 80 100	SHEAR STRENGTH kPa	○ UNCONFINED + FIELD VANE	● QUICK TRIAXIAL X LAB VANE	20 40 60 80 100	20 40 60					
245.0							235											
234.8							234											
10.2	Sandy SILT Very Dense Grey Wet (ML-NONPLASTIC)		10	SS	104													0 18 71 11
233.0							233											
12.0	Silty CLAY, sandy, trace gravel Hard Grey (TILL)(CL)		11	SS	45													2 26 45 27
230.1							231											
14.9	SAND, fine grained, trace silt, occasional iron oxide staining Very Dense Brown Moist (SP)		13	SS	102													
228.7							230											
16.3	SILT, trace to some sand Very Dense Grey Wet (ML-NONPLASTIC)		14	SS	110/ 279													
227.2							229											
17.8	SAND, fine grained, occasional iron oxide staining Very Dense Grey (SP)		15	SS	108													
226.3							228											
18.8	END OF BOREHOLE AT 18.75 m. BOREHOLE OPEN TO 18.75 m. Piezometer installation consists of 19 mm diameter Schedule 40 PVC pipe with a 1.52 m slotted screen. WATER LEVEL READINGS: DATE DEPTH(m) ELEV.(m) 2004.02.03 16.84 228.16						227											

RECORD OF BOREHOLE No 04-2

1 OF 2

METRIC

G.W.P.	LOCATION	Hwy 400 / Teston Road	ORIGINATED BY	JL
HWY 400	BOREHOLE TYPE	Solid Stem Augers	COMPILED BY	WM/SS
DATUM Geodetic	DATE	2004.02.19 - 2004.02.19	CHECKED BY	SMS

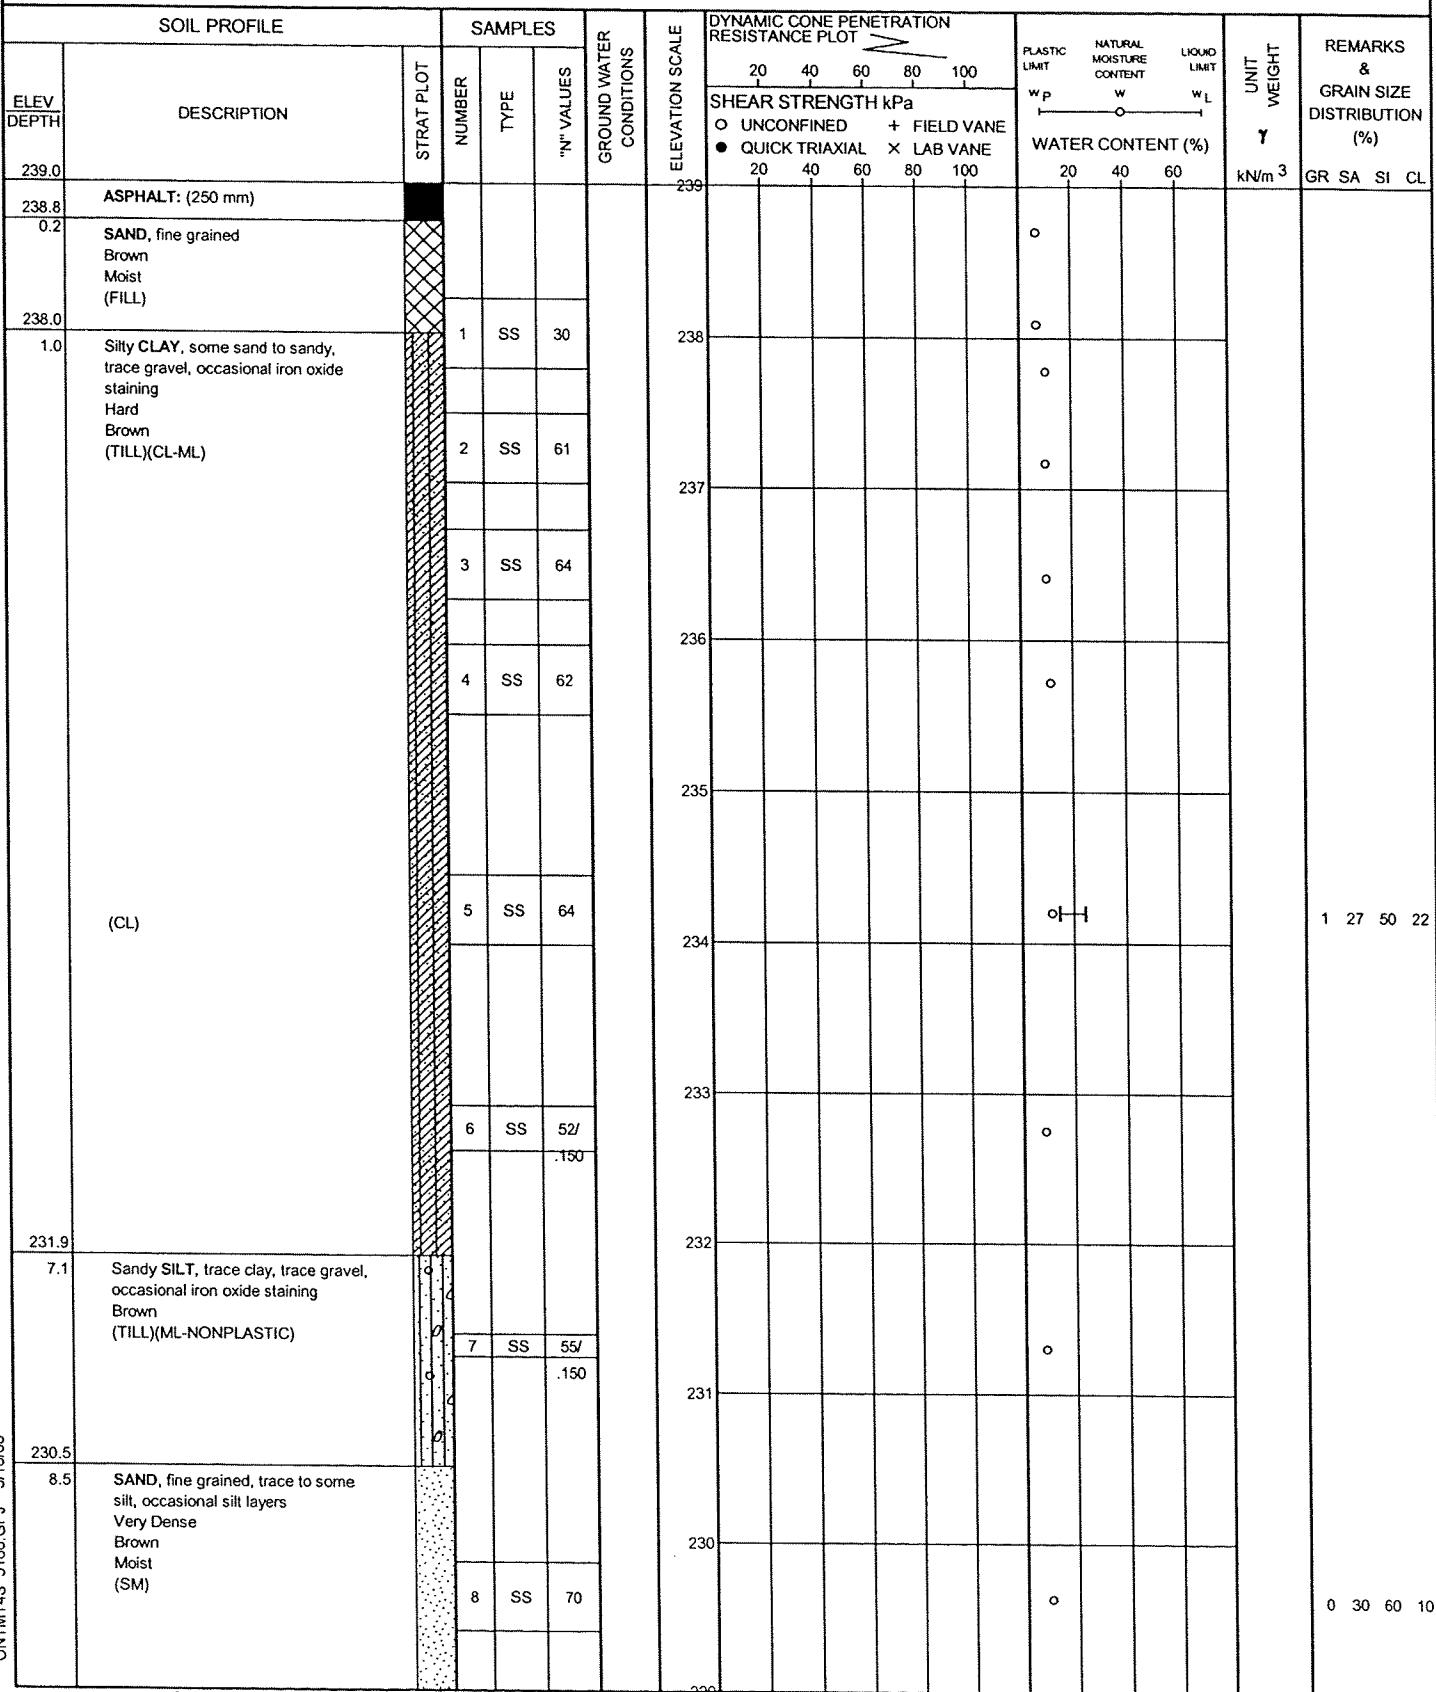

Continued Next Page

+ ³ × ³: Numbers refer to Sensitivity 20/15 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No 04-2

2 OF 2

METRIC

G.W.P.	LOCATION	Hwy 400 / Teston Road	ORIGINATED BY	JL
HWY 400	BOREHOLE TYPE	Solid Stem Augers	COMPILED BY	WM/SS
DATUM Geodetic	DATE	2004.02.19 - 2004.02.19	CHECKED BY	SMS

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT	NATURAL MOISTURE CONTENT	LIQUID LIMIT	UNIT WEIGHT	REMARKS & GRAIN SIZE DISTRIBUTION (%)			
ELEV DEPTH	STRAT PLOT	DESCRIPTION	NUMBER	TYPE	"N" VALUES			20	40	60	80	100					20	40	60	kN/m ³
239.0							229													
227.9			9	SS	52		228													
11.1		END OF BOREHOLE AT 11.13 m. BOREHOLE DRY AND OPEN TO 10.7m UPON COMPLETION. BOREHOLE BACKFILLED WITH BENTONITE AND DRILL CUTTINGS TO 1.0m, CONCRETE BETWEEN 0.3m AND 1.0m, AND EMULSIFIED ASPHALT FROM 0 TO 0.3m.																		

+ ³, X ³, Numbers refer to
Sensitivity

20
15 ϕ 5
10 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No 04-3

1 OF 2

METRIC

G.W.P.	LOCATION	Hwy 400 / Teston Road	ORIGINATED BY	JL
HWY 400	BOREHOLE TYPE	Hollow Stem Augers	COMPILED BY	WMSS
DATUM Geodetic	DATE	2004.02.24 - 2004.02.24	CHECKED BY	SMS

SOIL PROFILE			SAMPLES			ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	WATER CONTENT (%)	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES		GROUND WATER CONDITIONS	20	40	60	80	100						
244.2																		
0.1	TOPSOIL (50 mm) Silty CLAY, some sand, trace gravel, occasional rootlets Firm to Stiff Brown (REWORKEDE TILL)		1	SS	7													
242.8	Silty CLAY, sandy, trace gravel, occasional iron oxide staining Very Stiff to Hard Brown (TILL) (CL)		2	SS	8													
240.1	Sandy SILT, some clay, trace gravel Hard Grey (TILL)(ML)		3	SS	25													
			4	SS	47													
			5	SS	63													
			6	SS	69													
			7	SS	59													
			8	SS	50													
			9	SS	50													

Continued Next Page


+³, ×³: Numbers refer to
Sensitivity 20
10 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No 04-3

2 OF 2

METRIC

G.W.P.	LOCATION	Hwy 400 / Teston Road	ORIGINATED BY	JL
HWY 400	BOREHOLE TYPE	Hollow Stem Augers	COMPILED BY	WM/SS
DATUM Geodetic	DATE	2004.02.24 - 2004.02.24	CHECKED BY	SMS

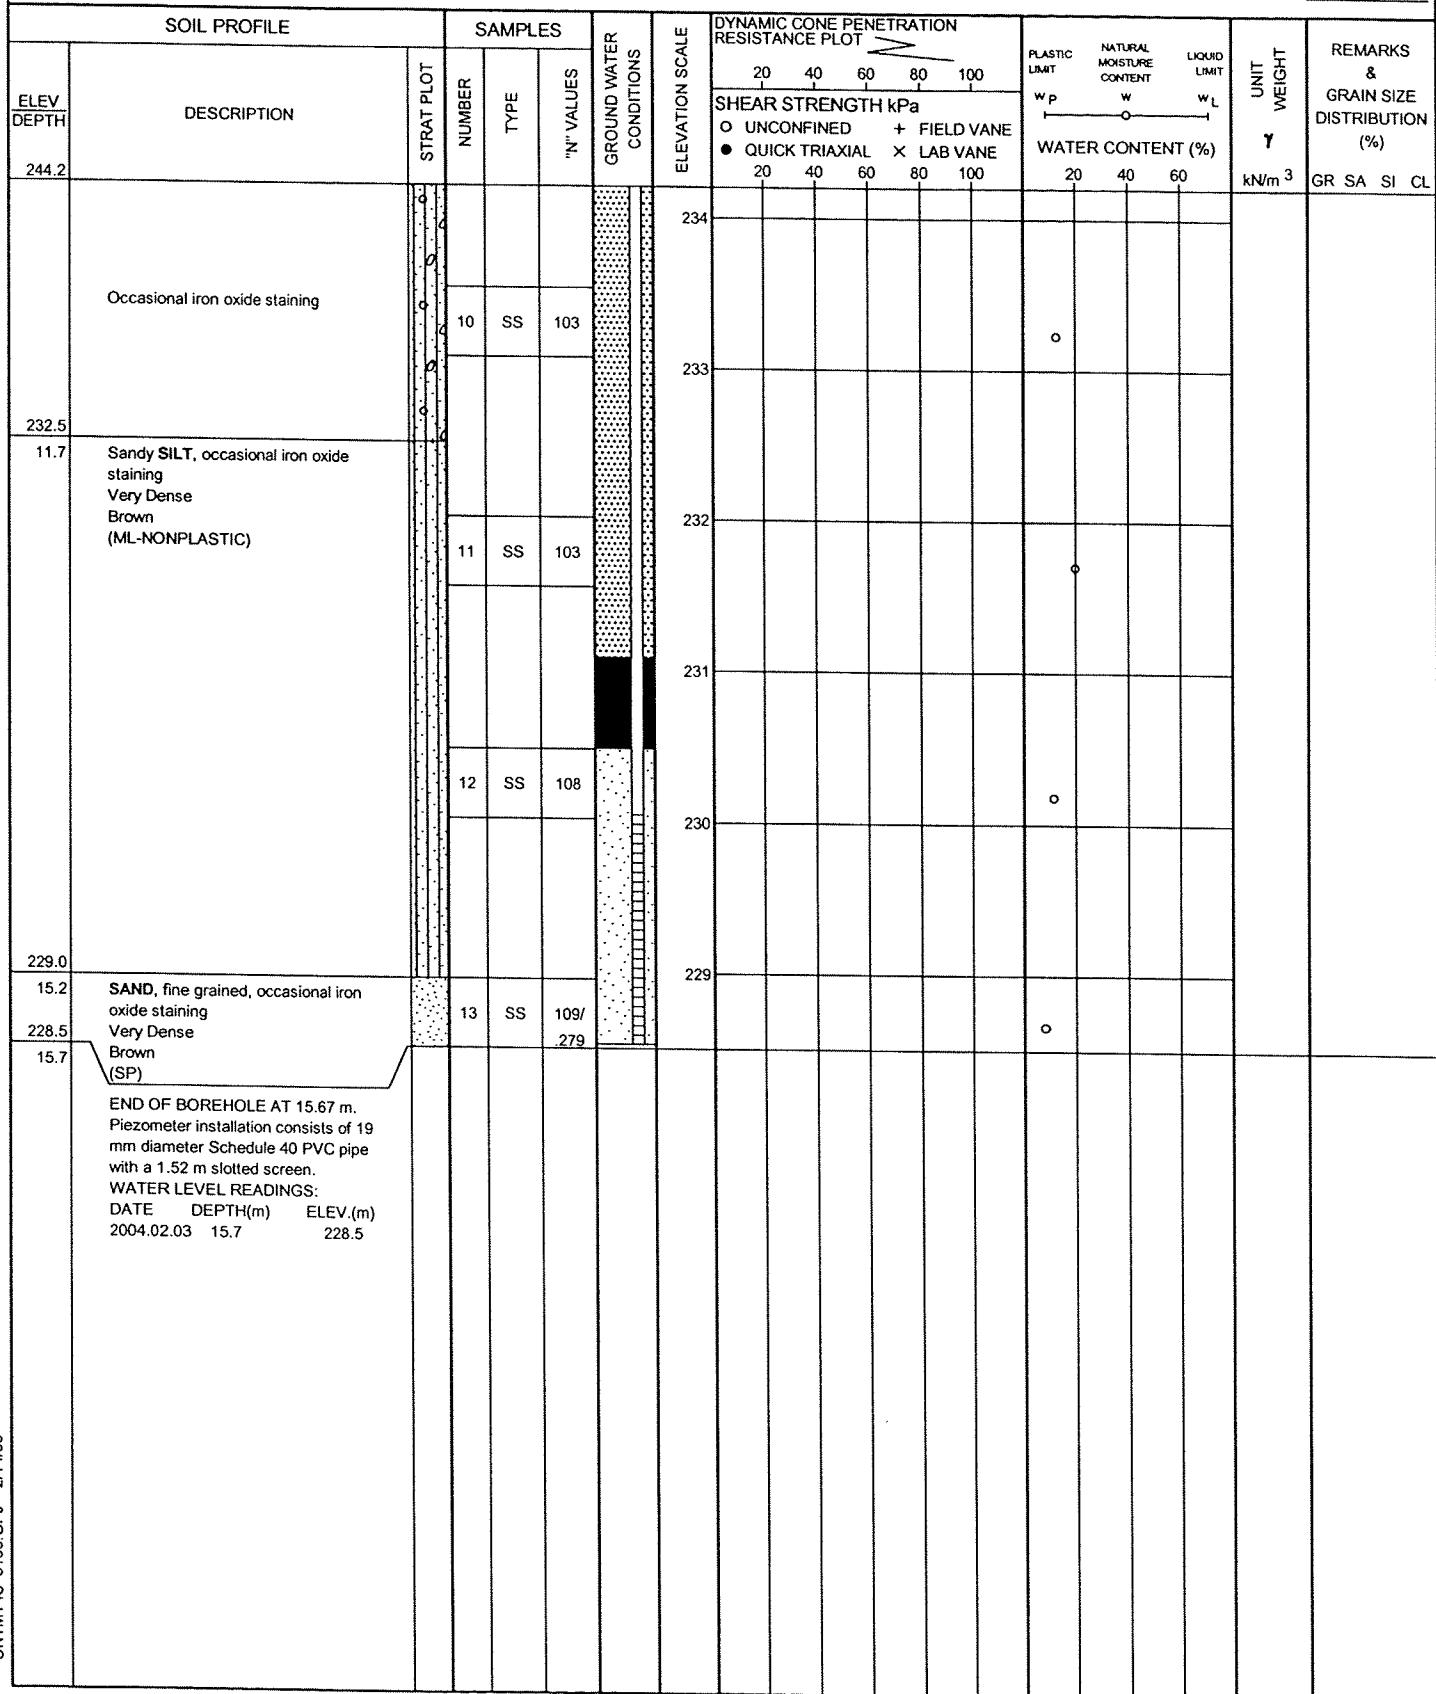

RECORD OF BOREHOLE No 04-18

1 OF 2

METRIC

G.W.P. _____ LOCATION Hwy 400 / Teston Road ORIGINATED BY JL
 HWY 400 BOREHOLE TYPE Hollow Stem Augers COMPILED BY WMSS
 DATUM Geodetic DATE 2004.02.19 - 2004.02.19 CHECKED BY SMS

SOIL PROFILE			SAMPLES			GND WATER CONDNS	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT WP	NATURAL MOISTURE CONTENT W	LIQUID LIMIT WL	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)		
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES		20	40	60	80	100	SHEAR STRENGTH kPa	○ UNCONFINED	+ FIELD VANE	● QUICK TRIAXIAL	× LAB VANE		
238.8																		
0.0	ASPHALT: (227 mm)																	
239.2																		
0.3	Gravelly SAND, trace silt Brown Moist (FILL)		1	GS														
238.4			1	SS	31													
			2	SS	45													
			3	SS	37													
236.6																		
2.9	Silty CLAY, some sand to sandy, trace gravel Hard Brown (TILL)(CL-ML)		4	SS	30													
			5	SS	31													
			6	SS	110													
232.4																		
7.1	Sandy SILT, fine grained Very Dense Damp (ML-NONPLASTIC)		7	SS	93/													2 26 49 23
231.0																		
8.5	SAND, fine grained, trace to some silt, occasional silt layers Very Dense Brown Moist (SM)		8	SS	91/ 275													

Continued Next Page

$+^3 \times 3$ Numbers refer to
Sensitivity

$15 \frac{20}{10} \frac{5}{10}$ (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No 04-18

2 OF 2

METRIC

G.W.P.	LOCATION	Hwy 400 / Teston Road	ORIGINATED BY	JL
HWY 400	BOREHOLE TYPE	Hollow Stem Augers	COMPILED BY	WM/SS
DATUM Geodetic	DATE	2004.02.19 - 2004.02.19	CHECKED BY	SMS

SOIL PROFILE		SAMPLES			ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)		
ELEV. DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	'N' VALUES	GROUND WATER CONDITIONS	20	40	60	80	100					GR SA SI CL	
239.5	Becoming Compact, Wet		9	SS	91								o				0 83 15 2
			10	SS	29								d				
			11	SS	13								o				flowing sand
224.3	some clay		2	GS													
15.2	END OF BOREHOLE AT 15.24 m UNABLE TO TURN AUGERS AND EXTEND BOREHOLE BEYOND 15.2m. BOREHOLE OPEN TO 12.19 m. BOREHOLE WET AT 11.13 m. BOREHOLE BACKFILLED WITH BENTONITE AND DRILL CUTTINGS TO 1.0m, CONCRETE BETWEEN 0.2m AND 1.0m AND EMULSIFIED ASPHALT FROM 0 TO 0.2m.																

+ ³, X ³: Numbers refer to Sensitivity

20
15 [±] 5
10 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No 04-19

1 OF 1

METRIC

G.W.P.	LOCATION	Hwy 400 / Teston Road	ORIGINATED BY	JL
HWY 400	BOREHOLE TYPE	Solid Stem Augers	COMPILED BY	WM/SS
DATUM Geodetic	DATE	2004.03.03 - 2004.03.03	CHECKED BY	SMS

SOIL PROFILE		SAMPLES			ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES	GROUND WATER CONDITIONS	20	40	60	80	100					
244.8																
244.8	TOPSOIL: (100 mm)															
0.1	Silty CLAY, trace to some sand, trace rootlets Firm Brown	1	SS	4												
244.7	Brown (CL)	2	SS	15												
0.7	Silty CLAY, some sand to sandy, trace gravel Very Stiff to Hard Brown (TILL)(CL)	3	SS	20												
		4	SS	41												
		5	SS	50/												
					.150											
241.3																
4.1	Sandy SILT, some clay, trace gravel Hard Grey (TILL)(ML)	6	SS	71												
240.4																
5.0	END OF BOREHOLE AT 5.03 m. BOREHOLE OPEN AND DRY UPON COMPLETION. BOREHOLE BACKFILLED WITH BENSEAL MIXED WITH CUTTINGS															

+ ³, X ³ Numbers refer to
Sensitivity

20
10 + 5 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No 04-20

1 OF 1

METRIC

G.W.P. _____ LOCATION Hwy 400 / Teston Road ORIGINATED BY JL
 HWY 400 BOREHOLE TYPE Solid Stem Augers COMPILED BY WM/SS
 DATUM Geodetic DATE 2004.03.02 - 2004.03.02 CHECKED BY SMS

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W_P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W_L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)		
ELEV. DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES		20	40	60	80	100	SHEAR STRENGTH kPa	20	40	60	80	100	
243.8	TOPSOIL: (100 mm)		1	SS	9								○	○				
242.8	Silty CLAY, trace to some sand, trace gravel, occasional oxide lenses, occasional rootlets Stiff Brown (CL) (REWORKEDE)		2	SS	22													
0.7	Silty CLAY, some sand, trace gravel, occasional iron oxide staining Very Stiff to Hard Brown (TILL)(CL-ML)		3	SS	24								○					
			4	SS	46								○					
			5	SS	83								○					
239.4																		
4.1	Sandy SILT, some clay, trace gravel Hard Grey (TILL)(ML)		6	SS	78													
238.5													○					
5.0	END OF BOREHOLE AT 5.03 m. BOREHOLE OPEN AND DRY TO 4.57 m. BOREHOLE BACKFILLED WITH BENSEAL MIXED WITH AUGER CUTTINGS.																1 16 48 35	

RECORD OF BOREHOLE No HM-1

1 OF 2

METRIC

G.W.P.	LOCATION	Hwy 400 / Teston Road, N 4 857 977, E 300 585	ORIGINATED BY	TK
HWY 400	BOREHOLE TYPE	Solid Stem Augers	COMPILED BY	SL/SS
DATUM Geodetic	DATE	2004.07.19 - 2004.07.19	CHECKED BY	SMS

ELEV DEPTH	DESCRIPTION	STRAT PLOT	SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W.P.	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W.L.	WATER CONTENT (%)	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)
			NUMBER	TYPE	"N" VALUES			20	40	60	80	100						
242.9																		
242.8	TOPSOIL: (125mm)																	
0.1	Clayey SILT, some sand, occasional organics, occasional silt pockets Stiff (CL-ML)		1	SS	12													
241.4																		
1.5	Clayey, Sandy SILT, trace gravel, occasional cobbles Very Stiff Brown to Grey (TILL)(CL-ML)		2	SS	29													
	Hard		3	SS	50/													
			4	SS	50/													
			5	SS	50/													
235.7																		
7.2	Sandy SILT, trace clay Very Dense Brown (TILL)(ML)		6	SS	50/													
233.8																		
9.1	SAND, trace silt, fine grained Very Dense Brown (SP)		7	SS	50/													
233.5																		
9.5	END OF BOREHOLE AT 9.5 m.																	

Continued Next Page

+ ³, X ³. Numbers refer to
Sensitivity

20
15Φ5
10 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No HM-1

2 OF 2

METRIC

G.W.P.	LOCATION	Hwy 400 / Teston Road, N4 857 977, E 300 585	ORIGINATED BY	TK
HWY 400	BOREHOLE TYPE	Solid Stem Augers	COMPILED BY	SL/SS
DATUM Geodetic	DATE	2004.07.19 - 2004.07.19	CHECKED BY	SMS

SOIL PROFILE			SAMPLES			ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)						
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES		GROUND WATER CONDITIONS	20	40	60	80	100	SHEAR STRENGTH kPa	○ UNCONFINED	+ FIELD VANE	● QUICK TRIAXIAL	× LAB VANE	WATER CONTENT (%)	20	40	60	kN/m ³
242.9	BOREHOLE OPEN TO 9.1 m AND DRY. BOREHOLE BACKFILLED WITH BENSEAL.																					

RECORD OF BOREHOLE No HM-2

1 OF 2

METRIC

G.W.P. _____ LOCATION Hwy 400 / Teston Road, N 4 859 416, E 300 343 ORIGINATED BY TK
 HWY 400 BOREHOLE TYPE Solid Stem Augers COMPILED BY SL/SS
 DATUM Geodetic DATE 2004.07.19 - 2004.07.19 CHECKED BY SMS

SOIL PROFILE			SAMPLES			ELEV DEPTH	DESCRIPTION	STRAT PLOT	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W_P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W_L	WATER CONTENT (%)	UNIT WEIGHT Y	REMARKS & GRAIN SIZE DISTRIBUTION (%)
NUMBER	TYPE	"N" VALUES	GROUND WATER CONDITIONS	ELEVATION SCALE	20 40 60 80 100	SHEAR STRENGTH kPa	○ UNCONFINED + FIELD VANE	● QUICK TRIAXIAL X LAB VANE	20 40 60 80 100	20 40 60	kN/m ³	GR SA SI CL							
250.0																			
0.0	Silty SAND, trace gravel, trace clay, occasional organic pockets																		
249.8	Compact Brown																		
0.2	Clayey, Sandy SILT, trace gravel, occasional iron oxide staining Hard Brown (TILL) (CL-ML)																		
	becoming Grey																		
244.5	SAND, some to trace silt, trace gravel Very Dense Grey Wet (SP)																		
5.5																			
242.4	Sandy SILT, some clay to clayey, trace gravel, occasional cobbles Very Dense Grey (TILL)(ML-NONPLASTIC)																		
7.6																			
	Continued Next Page																		

RECORD OF BOREHOLE No HM-2

2 OF 2

METRIC

G.W.P.	LOCATION	Hwy 400 / Teston Road, N 4 859 416, E 300 343	ORIGINATED BY	TK
HWY 400	BOREHOLE TYPE	Solid Stem Augers	COMPILED BY	SL/SS
DATUM Geodetic	DATE	2004.07.19 - 2004.07.19	CHECKED BY	SMS

SOIL PROFILE		SAMPLES			ELEV. DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES	GROUND WATER CONDITIONS	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W_P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W_L	WATER CONTENT (%)	UNIT WEIGHT Y	REMARKS & GRAIN SIZE DISTRIBUTION (%)		
20	40	60	80	100								SHEAR STRENGTH kPa					20	40	60	80	100			
250.0												○ UNCONFINED	+ FIELD VANE	20	40	60	80	100						
239.3												● QUICK TRIAXIAL	X LAB VANE	20	40	60	80	100						
10.7	SAND, trace silt Very Dense Grey	8	SS	92								239												
238.9																								
11.1	Wet (SP)																							
END OF BOREHOLE AT 11.1 m. Piezometer installation consists of 19 mm diameter Schedule 40 PVC pipe with a 1.52 m slotted screen.																								
WATER LEVEL READINGS: DATE DEPTH(m) ELEV.(m) 2004.08.05 10.7 239.3																								

RECORD OF BOREHOLE No OH-1

1 OF 2

METRIC

G.W.P.	LOCATION	Hwy 400 / Teston Road, N 4 857 004, E 300 750	ORIGINATED BY	TK
HWY 400	BOREHOLE TYPE	Solid Stem Augers	COMPILED BY	SL/SS
DATUM Geodetic	DATE	20.07.04 - 20.07.04	CHECKED BY	MA

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			20	40	60	80	100	SHEAR STRENGTH kPa	• UNCONFINED	+ FIELD VANE	• QUICK TRIAXIAL	× LAB VANE	
236.3																		
0.0	Clayey, Sandy SILT, some organics, trace gravel Very Stiff Dark Brown		1	SS	23													
234.8																		
1.5	Clayey, Sandy SILT, trace gravel, occasional cobbles Stiff Brown (TILL)(ML)		2	SS	8													0 23 53 24
	becoming Hard		3	SS	50/ .127													
			4	SS	50/ .127													
			5	SS	50/ .127													1 20 52 27
228.6			6	SS	50/ .127													
7.8	Sandy SILT, fine grained Very Dense Brown (ML-NONPLASTIC)		7	SS	50/ .127													
227.1																		
9.3	END OF BOREHOLE AT 9.3 m. BOREHOLE DRY AND OPEN TO 9.1m. BOREHOLE BACKFILLED WITH																	

Continued Next Page

+ ³ × ³ : Numbers refer to
Sensitivity

15 ^{± 5} / 10 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No OH-1

2 OF 2

METRIC

G.W.P.	LOCATION	Hwy 400 / Teston Road, N 4 857 004, E 300 750	ORIGINATED BY	TK
HWY 400	BOREHOLE TYPE	Solid Stem Augers	COMPILED BY	SL/SS
DATUM Geodelic	DATE	20.07.04 - 20.07.04	CHECKED BY	MA

SOIL PROFILE			SAMPLES			DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT			NATURAL MOISTURE CONTENT			LIQUID LIMIT			UNIT WEIGHT			REMARKS & GRAIN SIZE DISTRIBUTION (%)		
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	*N VALUES	GROUND WATER CONDITIONS	ELEVATION SCALE						W_P	W	W_L	20	40	60	20	40	60	γ	kN/m³	GR SA SI CL	
	BENSEAL.																								

RECORD OF BOREHOLE No OH-2

1 OF 2

METRIC

G.W.P.	LOCATION	Hwy 400 / Teston Road, N 4 857 386, E 300 731	ORIGINATED BY	TK
HWY 400	BOREHOLE TYPE	Hollow Stem Augers	COMPILED BY	SUSS
DATUM Geodetic	DATE	16.07.04 - 16.07.04	CHECKED BY	SMS

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)			
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	'N' VALUES		20 40 60 80 100	SHEAR STRENGTH kPa											
240.3								○ UNCONFINED + FIELD VANE											
0.0	Clayey, Sandy SILT, occasional organic layers Firm Brown		1	SS	6			20 40 60 80 100	● QUICK TRIAXIAL X LAB VANE										
238.8									20 40 60 80 100										
1.5	Clayey, Sandy SILT, trace gravel Hard Brown (TILL)(CL-ML)		2	SS	34				240									0 17 55 28	
	Becoming Grey		3	SS	85/ 150				239										
			4	SS	77				238										
			5	SS	50/ .150				237										
234.2			6	SS	50/ .100				236										
6.1	Sandy SILT, trace gravel Very Dense Grey (TILL)(ML-NONPLASTIC)		7	SS	50/ .100				235									3 22 45 31	
230.5									234										
9.8	END OF BOREHOLE AT 9.8 m.								233										
									232										
									231										

Continued Next Page

+ 3' x 3' Numbers refer to
Sensitivity 15 20 10 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No OH-2

2 OF 2

METRIC

G.W.P.	LOCATION	Hwy 400 / Teston Road, N 4 857 386, E 300 731	ORIGINATED BY	TK
HWY 400	BOREHOLE TYPE	Hollow Stem Augers	COMPILED BY	SL/SS
DATUM Geodetic	DATE	16.07.04 - 16.07.04	CHECKED BY	SMS

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W_P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W_L	WATER CONTENT (%)	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)	
ELEV. DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES	20 40 60 80 100	SHEAR STRENGTH kPa	20 40 60 80 100	20 40 60	kN/m ³	GR SA SI CL							
	BOREHOLE DRY AND OPEN TO 6.8 m. BOREHOLE BACKFILLED WITH BENSEAL.																	

RECORD OF BOREHOLE No OH-3

1 OF 2

METRIC

G.W.P.	LOCATION	Hwy 400 / Teston Road, N 4 857 359, E 300 692	ORIGINATED BY	TK
HWY 400	BOREHOLE TYPE	Hollow Stem Augers	COMPILED BY	SL/SS
DATUM Geodetic	DATE	15.07.04 - 15.07.04	CHECKED BY	SMS

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W_P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W_L	WATER CONTENT (%)	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	*N VALUES			20	40	60	80	100							GR SA SI CL
240.2																			
0.0	Clayey SILT, some sand, trace gravel, occasional organics Stiff Brown		1	SS	12														
238.7																			
1.5	Clayey, Sandy SILT, trace gravel, occasional iron oxide staining Hard Brown to Grey (TILL)(CL-ML)		2	SS	31														1 17 61 21
232.6			3	SS	86														
			4	SS	86/.279														
			5	SS	70														
7.6	Sandy SILT, trace gravel, occasional iron oxide staining Very Dense Brown to Grey (TILL)(ML-NONPLASTIC)		6	SS	71														
230.5			7	SS	61														
9.8	END OF BOREHOLE AT 9.8 m.																		

Continued Next Page

+ 3 : X 3 : Numbers refer to
Sensitivity 15 \pm 5 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No OH-3

2 OF 2

METRIC

G.W.P.	LOCATION	Hwy 400 / Teston Road, N 4 857 359, E 300 692	ORIGINATED BY	TK
HWY 400	BOREHOLE TYPE	Hollow Stem Augers	COMPILED BY	SUSS
DATUM Geodetic	DATE	15.07.04 - 15.07.04	CHECKED BY	SMS

SOIL PROFILE			SAMPLES			DYNAMIC CONE PENETRATION RESISTANCE PLOT						LIQUID LIMIT			REMARKS & GRAIN SIZE DISTRIBUTION (%)			
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES	GROUND WATER CONDITIONS	ELEVATION SCALE	SHEAR STRENGTH kPa					PLASTIC LIMIT W_P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W_L	UNIT WEIGHT γ	kN/m³	GR SA SI CL
								○ UNCONFINED	+ FIELD VANE	● QUICK TRIAXIAL	X LAB VANE	20	40	60	80	100	20	40
	BOREHOLE DRY AND OPEN TO 8.2 m. BOREHOLE BACKFILLED WITH BENSEAL.																	

RECORD OF BOREHOLE No OH-4

1 OF 2

METRIC

G.W.P.	LOCATION	Hwy 400 / Teston Road, N4 857 789, E 300 673	ORIGINATED BY	TK
HWY 400	BOREHOLE TYPE	Solid Stem Augers	COMPILED BY	SL/SS
DATUM Geodetic	DATE	16.07.04 - 16.07.04	CHECKED BY	SMS

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	DYNAMIC CONE PENETRATION RESISTANCE PLOT					ELEVATION SCALE	PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	WATER CONTENT (%)	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	N' VALUES		20 40 60 80 100	SHEAR STRENGTH kPa	○ UNCONFINED + FIELD VANE	● QUICK TRIAXIAL X LAB VANE	20 40 60 80 100							
240.3																		
0.0	Clayey SILT, trace to some sand, occasional organic pockets, trace rootlets Firm Dark Brown		1	SS	7								240			○		
238.7													239					
1.5	Clayey SILT, some sand to sandy, trace gravel, occasional iron oxide staining, occasional cobbles Very Stiff to Hard Brown (TILL)(CL-ML)		2	SS	22								238			○		
			3	SS	.50/ .150								237			○		
			4	SS	.50/ .076								236			○		
			5	SS	.88/ .254								235					
232.6			6	SS	.50/ .127								234			○		
7.6	Sandy SILT, trace clay, trace to some gravel, occasional iron oxide staining Very Dense Brown to Grey (TILL)(ML-NONPLASTIC)		7	SS	.50/ .127								233			○		
231.0													232					
9.3	END OF BOREHOLE AT 9.3 m. BOREHOLE OPEN TO 8.5 m AND DRY. BOREHOLE BACKFILLED WITH												231			○		

Continued Next Page

+ 3 , × 3 : Numbers refer to
Sensitivity 20
15 ± 5 (%) STRAIN AT FAILURE
10

RECORD OF BOREHOLE No OH-4

2 OF 2

METRIC

G.W.P. _____ LOCATION Hwy 400 / Teston Road, N 4 857 789, E 300 673 ORIGINATED BY TK
 HWY 400 BOREHOLE TYPE Solid Stem Augers COMPILED BY SL/SS
 DATUM Geodetic DATE 16.07.04 - 16.07.04 CHECKED BY SMS

SOIL PROFILE			SAMPLES			ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W_P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W_L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)	
ELEV	DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE		*N" VALUES	GROUND WATER CONDITIONS	20	40	60	80	100				
							SHEAR STRENGTH kPa			FIELD VANE			LAB VANE				
		BENSEAL.							20	40	60	80	100				

RECORD OF BOREHOLE No OH-5

1 OF 2

METRIC

G.W.P. LOCATION Hwy 400 / Teston Road, N 4 858 759, E 300 453 ORIGINATED BY TK
 HWY 400 BOREHOLE TYPE Solid Stem Augers COMPILED BY SL/SS
 DATUM Geodetic DATE 14.07.04 - 14.07.04 CHECKED BY SMS

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W_P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W_L	WATER CONTENT (%)	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	N' VALUES			20	40	60	80	100	UNCONFINED	FIELD VANE	QUICK TRIAXIAL	LAB VANE			
239.9																			
0.0	Silty SAND, trace gravel, trace silt, trace organics Loose Dark Brown		1	SS	5														
238.1	Clayey SILT, some sand to sandy, trace gravel, occasional iron oxide staining Hard Brown to Grey (TILL)(CL-ML)		2	SS	49														
			3	SS	60														
			4	SS	49														
			5	SS	49														
			6	SS	86														
232.8	Sandy SILT, trace gravel, occasional cobbles Very Dense Grey																		
7.2																			
230.8	Clayey, Sandy SILT, trace gravel Hard Grey (TILL)(CL-ML)		7	SS	37														
230.2	END OF BOREHOLE AT 9.8 m.																		
9.8																			

Continued Next Page

+ 3 , $\times 3$: Numbers refer to
Sensitivity

15 \pm 5 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No OH-5

2 OF 2

METRIC

G.W.P. LOCATION Hwy 400 / Teston Road, N 4 858 759, E 300 453 ORIGINATED BY TK
 HWY 400 BOREHOLE TYPE Solid Stem Augers COMPILED BY SL/SS
 DATUM Geodetic DATE 14.07.04 - 14.07.04 CHECKED BY SMS

SOIL PROFILE			SAMPLES			ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	WATER CONTENT (%)	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES		20	40	60	80	100						
SHEAR STRENGTH kPa																	
	BOREHOLE OPEN TO 9.8 m. BOREHOLE WET AT 8.1 m. BOREHOLE BACKFILLED WITH BENSEAL.																

RECORD OF BOREHOLE No CV-12A

1 OF 2

METRIC

G.W.P.	LOCATION	Hwy 400 / Teston Road, N 4 857 700, E 300 620	ORIGINATED BY	TK
HWY 400	BOREHOLE TYPE	Solid Stem Augers	COMPILED BY	SL/SS
DATUM Geodelic	DATE	15.07.04 - 15.07.04	CHECKED BY	SMS

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W_P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W_L	UNIT WEIGHT Y	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES		20 40 60 80 100	SHEAR STRENGTH kPa	20 40 60 80 100	20 40 60	20 40 60						
239.3																	
0.0	Clayey, SILT, some sand, trace gravel, occasional organic layer Stiff Brown		1	SS	11								○				
238.5																	
0.8	Clayey, Sandy, SILT, trace gravel Hard Brown (TILL)(CL-ML)		2	SS	37								○				
			3	SS	86/ 254												
	Becoming Grey		4	SS	79/ 279												
233.2			5	SS	87/ 279								○				
6.1	Sandy SILT, trace gravel, Very Dense Grey (TILL)(ML-NONPLASTIC)		6	SS	50/ .127								○				
231.5			7	SS	50/ .102								○				
229.6													○				
9.8	END OF BOREHOLE AT 9.8 m.																

Continued Next Page

+³, ×³: Numbers refer to Sensitivity

15+5
10 (%) STRAIN AT FAILURE


RECORD OF BOREHOLE No CV-12A

2 OF 2

METRIC

G.W.P. LOCATION Hwy 400 / Teston Road, N 4 857 700, E 300 620 ORIGINATED BY TK
 HWY 400 BOREHOLE TYPE Solid Stem Augers COMPILED BY SUSS
 DATUM Geodetic DATE 15.07.04 - 15.07.04 CHECKED BY SMS

SOIL PROFILE			SAMPLES			ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES		SHEAR STRENGTH kPa	UNCONFINED	FIELD VANE	QUICK TRIAXIAL	LAB VANE	20 40 60 80 100	20 40 60 80 100	20 40 60	kN/m ³	
	BOREHOLE OPEN TO 9.8 m. BOREHOLE WET AT 6.6 m. BOREHOLE BACKFILLED WITH BENSEAL.															

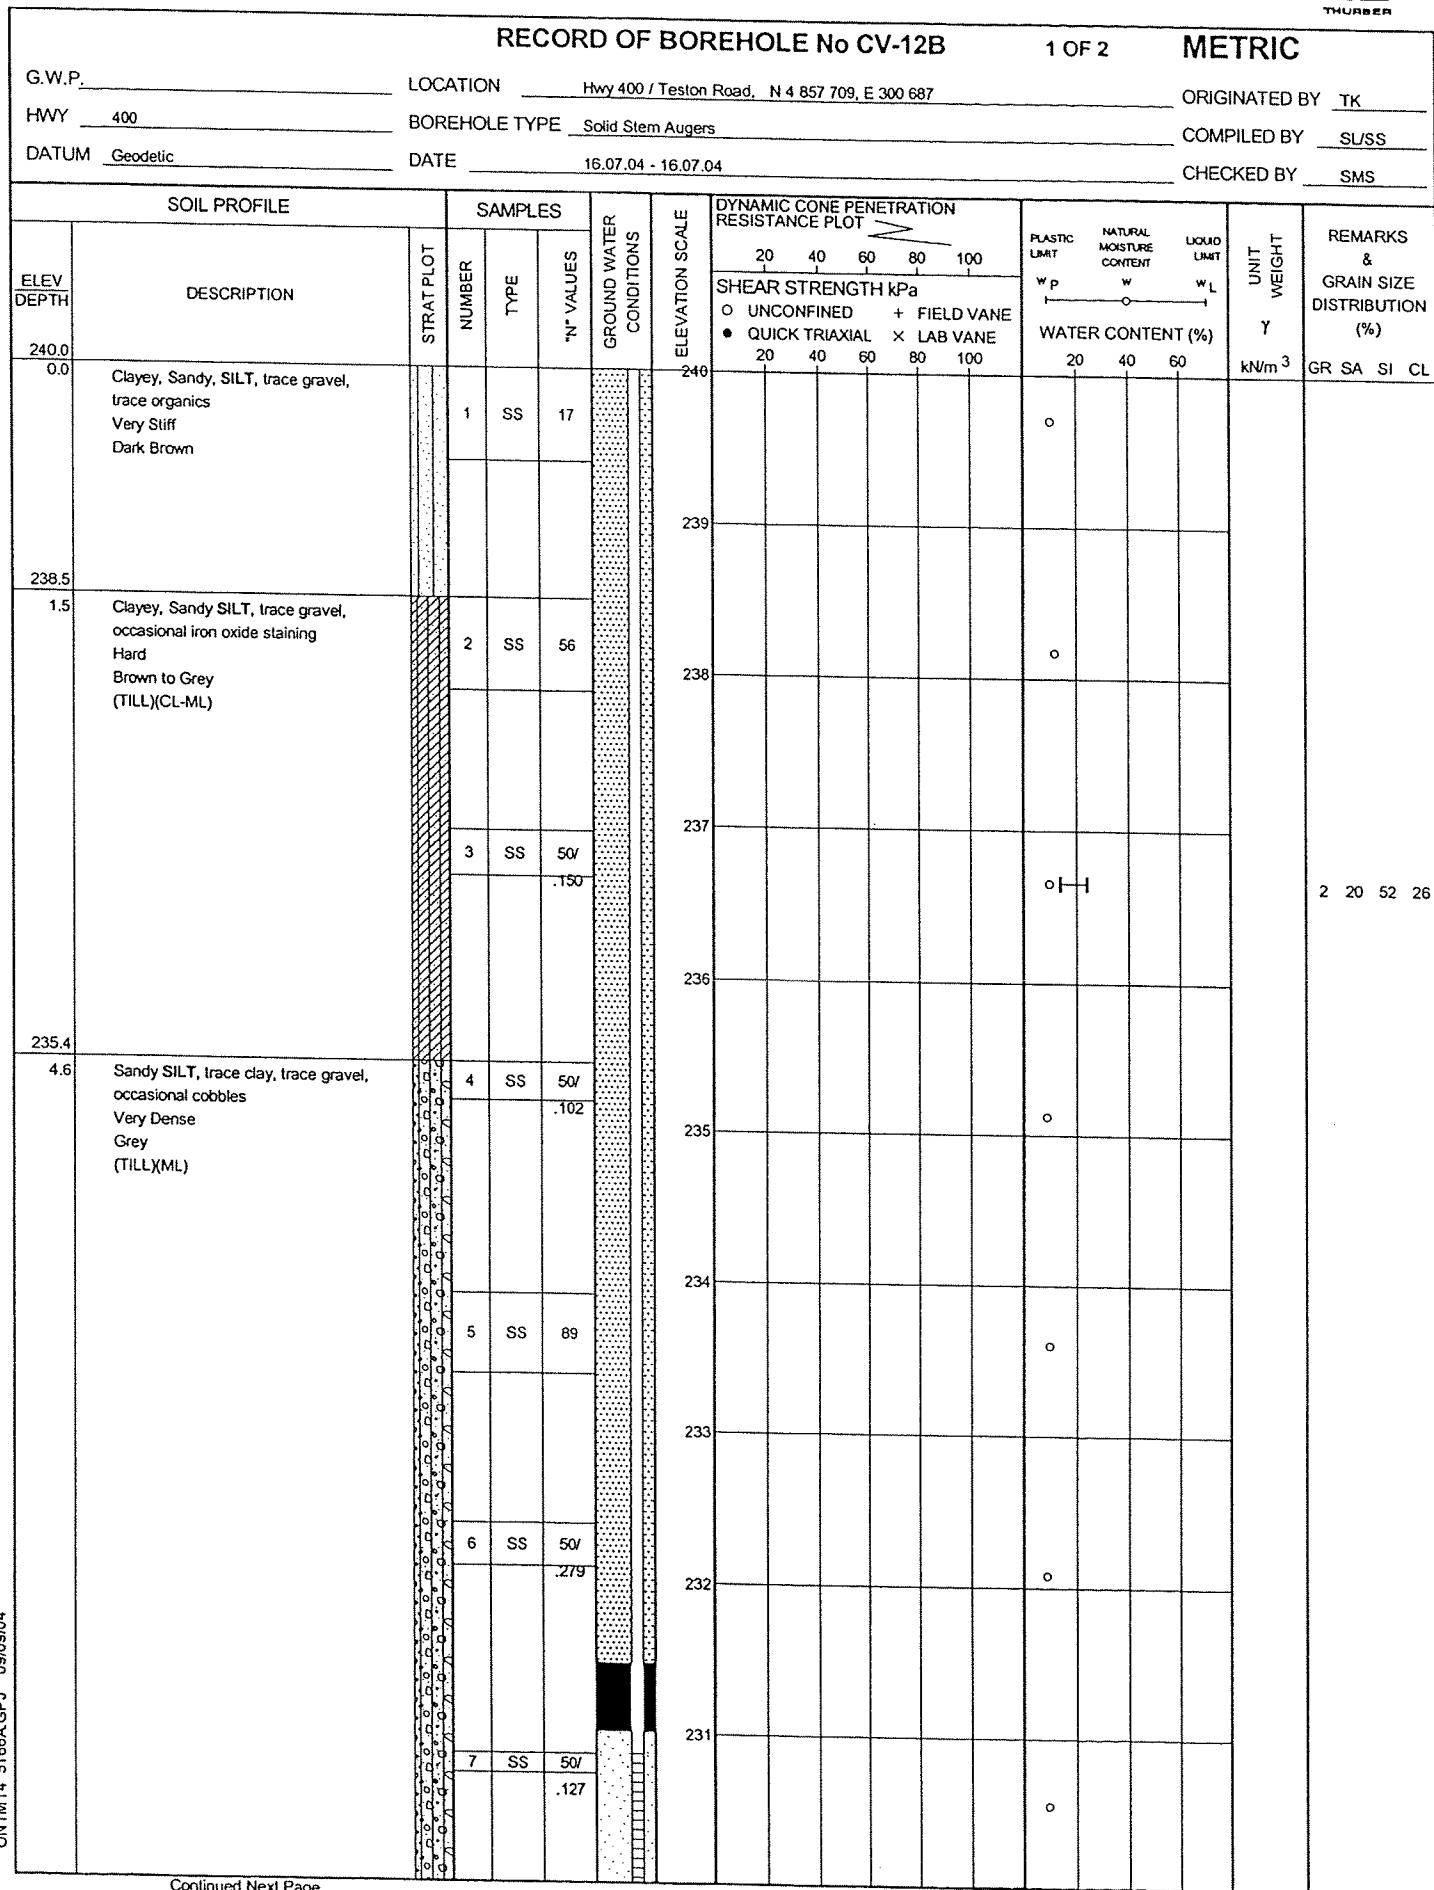

RECORD OF BOREHOLE No CV-12B

2 OF 2

METRIC

G.W.P. LOCATION Hwy 400 / Teston Road, N 4 857 709, E 300 687 ORIGINATED BY TK
 HWY 400 BOREHOLE TYPE Solid Stem Augers COMPILED BY SL/SS
 DATUM Geodetic DATE 16.07.04 - 16.07.04 CHECKED BY SMS

SOIL PROFILE			SAMPLES			ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W_P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W_L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL		
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	*N* VALUES		GROUND WATER CONDITIONS	20	40	60	80	100	SHEAR STRENGTH kPa	20	40	60	kN/m ³	
229.3						-230							○					
10.7	Sandy SILT, fine grained Very Dense		8	SS	50/													
229.1	Grey (ML-NONPLASTIC)				.127													
11.0	END OF BOREHOLE AT 11.0 m. Piezometer installation consists of 19 mm diameter Schedule 40 PVC pipe with a 1.52 m slotted screen.																	
WATER LEVEL READINGS:																		
DATE DEPTH																		
05/08/04 10.8 (m)																		

RECORD OF BOREHOLE No CV-13A

1 OF 2

METRIC

G.W.P.	LOCATION	Hwy 400 / Teston Road, N 4 858 645, E 300 534	ORIGINATED BY	TK
HWY 400	BOREHOLE TYPE	Solid Stem Augers	COMPILED BY	SLSS
DATUM Geodetic	DATE	14.07.04 - 14.07.04	CHECKED BY	SMS

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES		20	40	60	80	100	SHEAR STRENGTH kPa	UNCONFINED	FIELD VANE	QUICK TRIAXIAL	LAB VANE	
229.0	0.0 Clayey SILT, some sand, some gravel, some organic pockets Stiff Brown		1	SS	8												0
227.0	2.0 Sandy SILT, trace clay, trace gravel, occasional cobbles Compact Grey (TILL)(ML-NONPLASTIC)		2	SS	15												o
	Becoming Dense to Very Dense		3	SS	15												
			4	SS	39												
			5	SS	50/												
					.229												
221.4	7.6 Silty SAND, fine grained, trace gravel, occasional cobbles Very Dense Grey (SM)		6	SS	50/												o
220.4					.279												o
219.2	8.5 SILT, trace sand Very Dense Grey (ML-NONPLASTIC)		7	SS	65												o
9.8	END OF BOREHOLE AT 9.8 m.																

Continued Next Page

+ 3 , $\times 10^3$; Numbers refer to Sensitivity
 $15 \frac{1}{2} \frac{5}{10}$ (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No CV-13A

2 OF 2

METRIC

G.W.P.	LOCATION	Hwy 400 / Teston Road, N 4 858 645, E 300 534	ORIGINATED BY	TK
HWY 400	BOREHOLE TYPE	Solid Stem Augers	COMPILED BY	SL/SS
DATUM Geodetic	DATE	14.07.04 - 14.07.04	CHECKED BY	SMS

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT WP	NATURAL MOISTURE CONTENT W	LIQUID LIMIT WL	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			20 40 60 80 100	20 40 60 80 100	SHEAR STRENGTH kPa ○ UNCONFINED + FIELD VANE ● QUICK TRIAXIAL X LAB VANE	20 40 60	kN/m ³						
	BOREHOLE OPEN TO 9.8 m. BOREHOLE WET AT 2.1 m. BOREHOLE BACKFILLED WITH BENSEAL.																	

+³, ×³ ; Numbers refer to Sensitivity

20
15 \pm 5
10 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No CV-13B

1 OF 2

METRIC

G.W.P. LOCATION Hwy 400 / Teston Road, N 4 858 657, E 300 558 ORIGINATED BY TK
 HWY 400 BOREHOLE TYPE Solid Stem Augers COMPILED BY SUSS
 DATUM Geodetic DATE 15.07.04 - 15.07.04 CHECKED BY SMS

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)	
ELEV. DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	*N [*] VALUES		20 40 60 80 100	SHEAR STRENGTH kPa	20 40 60 80 100	UNCONFINED ○	FIELD VANE +	QUICK TRIAXIAL ●	LAB VANE ×	WATER CONTENT (%)	20 40 60	kN/m ³	GR SA SI CL
229.7																	
0.0	Clayey SILT, some sand, some organics, trace rootlets, occasional silt pockets Soft Dark Brown		1	SS	3										○		
228.9																	
0.7	Silty SAND, trace clay, occasional silt layers Dense Grey																
227.7			2	SS	41										○		
2.0	Clayey SILT, some sand to sandy, trace gravel, occasional silt layers, occasional cobbles Hard Grey (TILL)(CL)		3	SS	48												0 12 63 24
			4	SS	75												
			5	SS	33												
223.1																	
6.6	SAND, trace to some silt Dense Brown (SP/SM)														○		
221.7			6	SS	34										○		
8.0	Silty SAND, trace gravel Dense to Very Dense Grey (SM)		7	SS	73										○		
219.9																	
9.8	END OF BOREHOLE AT 9.8 m.																

Continued Next Page

+ ³, × ³: Numbers refer to Sensitivity
 15 [±] 5
 10 (%) STRAIN AT FAILURE

RECORD OF BOREHOLE No CV-13B

2 OF 2

METRIC

G.W.P.	LOCATION	Hwy 400 / Teston Road, N 4 858 657, E 300 558	ORIGINATED BY	TK
HWY 400	BOREHOLE TYPE	Solid Stem Augers	COMPILED BY	SL/SS
DATUM Geodetic	DATE	15.07.04 - 15.07.04	CHECKED BY	SMS

SOIL PROFILE			SAMPLES			ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _P	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)		
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES		GROUND WATER CONDITIONS	20	40	60	80	100	SHEAR STRENGTH kPa	20	40	60	kN/m ³	GR SA SI CL
	Piezometer installation consists of 19 mm diameter Schedule 40 PVC pipe with a 1.52 m slotted screen.																	
	WATER LEVEL READINGS:																	
	DATE	DEPTH																
		(m)																
	15/07/04	1.8																
	05/08/04	0.6																