

**FOUNDATION
INVESTIGATION
REPORT**

CONTRACT NO. 2001- 0012

HIGH MAST LIGHTING

TABLE OF CONTENTS

<u>INTRODUCTION</u>	2
PART A – FOUNDATION INVESTIGATION REPORT	3
<u>1.0 SITE DESCRIPTION</u>	3
<u>2.0 INVESTIGATION METHODOLOGY AND RESULTS</u>	4
<u>3.0 SUBSURFACE CONDITIONS</u>	5
3.1 GENERAL	5
3.2 SUBSURFACE PROFILE	5
3.2.1 Fill	5
3.2.2 Topsoil	6
3.2.3 Clayey Silt/Sandy Silt Till	6
3.2.4 Interglacial Sand and Gravel	7
3.2.5 Shale Bedrock	8
3.3 GROUNDWATER	8
<u>4.0 CLOSURE</u>	9

List of Tables

Table 1 Origin of Compiled Boreholes

List of Drawings

Drawing No. 1 Bore Hole Location Plan

APPENDICES

Appendix A Statement of Limitations

Appendix B Borehole Logs

FOUNDATION INVESTIGATION REPORT - MTO COMPILED

(FROM CONTRACT NO. 68-24 DATA) following the above appendices

No Geo Gres

INTRODUCTION

This report presents the factual results of a geotechnical study that was completed by DST Consulting Engineers (DST) in relation to the construction of proposed High Mast Lighting Poles along Highway 401 between Renforth Drive and Highway 427.

This report is subject to the attached Statement of Limitations of Appendix A.

PART A – FOUNDATION INVESTIGATION REPORT

1.0 SITE DESCRIPTION

The proposed High Mast Lighting (HML) Poles will be installed along Highway 401 between Renforth Drive and Highway 427. More specifically, the HML's will be constructed at various locations within the Highway 401\Highway 427 basket-weave interchange which extends from just west of Renforth Drive to just east of Highway 27.

The topography within the interchange area is dominated by a series of approach embankments and earth cuts associated with the many overpass and underpass structures that are present within the Highway 401 and 427 Interchange. Overall, the terrain with the intersection slopes from west to east and north to south. Drainage through the interchange is dominated by the north south flowing Mimico Creek which passes through the site in a man-made channel a short distance to the east of Highway 27.

The area surrounding the Highway 401/427 interchange is totally developed by a series of commercial and industrial developments.

2.0 INVESTIGATION METHODOLOGY AND RESULTS

The investigation aspects of this study consisted of the following:

1. Compilation of sub-surface information for the general site area as available from within the "Geocres" databank system of the MTO's Foundation Design Section.
2. Cross-referencing of the data obtained during 1) relative to the proposed HML pole locations, leading to the identification of those most relevant to the present study.
3. Reproduction of the relevant boreholes using present day borehole presentation software to produce a series of legible and consistent looking borehole logs. This included converting the northings, eastings and elevations of the original logs into the present day systems.

This exercise resulted in a total of 48 boreholes (BHC1 though BH C48) being identified as relevant to the proposed works. The location of these boreholes is shown on the attached Borehole Locations Plan, with borehole logs presented in the attached Appendix B. For completeness, Table 1 presents details on the origin of the compiled boreholes relative to their original borehole designation and file number within the MTO's "geocres" databank system. The prefix C has been added to the borehole numbers of this report to reflect their "compiled" nature and to help avoid confusion with the original borehole numbers. As indicated in Table 1, the boreholes reproduced within this report were all drilled in 1966 and 1967.

Laboratory water content data, plasticity data and grain size data as presented on the original borehole logs has been included on the reproduced borehole logs of Appendix B. However, complete grain size distribution curves as presented as part of the original studies are not reproduced within.

Borehole location data as presented on the reproduced borehole logs of Appendix B and on the Borehole Locations Plan are relevant to the NAD83 system and were obtained based on the assumption the original imperial co-ordinates shown on the logs were based on the NAD23 system. Geodetic elevation data as presented on the logs was determined by straight conversion of the imperial elevation data presented on the original borehole logs. Through discussion with the survey department of Marshall Macklin Monaghan it is understood that this approach may result in the elevations being in error by between 0.1 and 0.2m, which is considered insignificant to the present study.

3.0 SUBSURFACE CONDITIONS

3.1 General

Based on the soil conditions encountered within the boreholes, the original soil profile within the project limits consists of a thin surficial layer of topsoil overlying an extensive layer of clayey silt to sandy silt till that typically extends to the top of the underlying shale bedrock. However, discontinuous layers/pockets of cohesionless sand and gravelly sand are present at many locations within the till. The total thickness of overburden deposits increase from about 5 to 8 m in the vicinity of Renforth Drive to a depth in excess of 15 m to the east of Highway 27. In association with the increasing thickness of overburden deposits, the elevation to the underlying shale bedrock decreases from about elevation 150 m in the vicinity of Renforth Drive to below elevation 130 m to the east of Highway 27. Surficial deposits of fill material associated with the construction of the various embankments that are present within the project limits are also expected, although data relating to the type, consistency and extent of these deposits was not obtained as part of this study. Reported groundwater levels within the various boreholes across the site indicates that the original water table was located at quite shallow depth.

A more in depth discussion on each of the various soil materials identified above is presented in Section 3.2 with an assessment of groundwater conditions presented in Section 3.3. However, for specific information the reader should consult the attached Borehole logs of Appendix B. It should also be noted that the discussion presented within is based on borehole data that dates back to 1966 and 1967. While the sub-surface conditions at depth are not expected to have changed significantly, the conditions within the upper 3 m may vary substantially as a result of construction and landscaping activities that have been undertaken since that time.

3.2 Subsurface Profile

3.2.1 Fill

While surficial fill materials are only reported within two (2) of the boreholes presented within (BH C6 and C21), these types of materials are known to exist throughout the interchange area as part of the many embankments that are present. While not confirmed, it would be expected that the fill would primarily consist of local earth fill similar to that encountered within BH C6 and C21. However, some fill sections constructed with shale bedrock could also be present.

3.2.2 Topsoil

A layer of topsoil varying between 200 and 300 mm was encountered at surface at the location of most of the Boreholes presented in Appendix B. However, it is expected that these depths will have changed as a part of subsequent construction and landscaping activities within the Highway 401/Highway 427 interchange area.

3.2.3 Clayey Silt/Sandy Silt Till

This material represents the dominant overburden layer across the site as evidenced by its presence in every borehole log presented in Appendix B either immediately below the surficial topsoil layer or interbedded with interglacial sand deposits. In many instances this material extends uninterrupted to the top of the underlying shale bedrock. The total thickness of overburden till deposits, including the interbedded sand layers, varies from about 6 to 8 m in the vicinity of Renforth Drive to greater than 15 m to the east of Highway 27. There is also some evidence to suggest that the total thickness of overburden deposits increases along Highway 27 from north to south.

Texturally, the till material appears to consist of a combination of slightly cohesive clayey silt and more non-plastic sandy silt materials. Traces of gravel and occasional cobbles and boulders are also noted within the till, which is consistent with the glacial origin of this material. The results of 20 grain size distribution analyses on the clayey silt fraction of the deposit as presented on the attached borehole logs reveal the following:

Gravel	Average Content	7 % (range 0 to 18%)
Sand	Average Content	33 % (range 12 to 50 %)
Silt	Average Content	42 % (range 5 to 57 %)
Clay	Average Content	24 % (range 8 to 24 %)

Similarly, the results of 16 grain size distribution analyses for the sandy silt fraction as presented on the attached borehole logs reveal the following:

Gravel	Average Content	12 % (range 0 to 35%)
Sand	Average Content	33 % (range 6 to 75 %)
Silt	Average Content	48 % (range 5 to 93 %)
Clay	Average Content	7 % (range 0 to 16 %)

Atterberg plasticity results completed on clayey silt fraction indicate that the material is of low plasticity, with in-situ water contents that are typically below the plastic limit of the soil.

SPT 'N' values reported on the logs are typically in excess of 30 and most often well in excess of 50, indicating that the plastic clayey silt portion has a hard consistency with the more cohesionless sandy silt material being considered dense to very dense. However, at a few locations, some lower values were recorded in the uppermost 2 to 3 m, suggesting that stiff to very stiff conditions occasionally exist near the surface.

3.2.4 Interglacial Sand and Gravel

This refers to apparently discontinuous layers/pockets of cohesionless sand and gravelly sand mixtures that were frequently encountered either above, within or below the dominant glacial till materials. The maximum confirmed thickness of these materials within the boreholes of Appendix B is 4.4 m at BH C13 although typically, these deposits are present as layers between about 2 to 3 m in thickness. However, thin lenses of similar material are also noted at many other locations within the till unit.

Texturally, the material is quite variable and varies from silty sand through to sand with a trace of silt to gravelly sand materials. The results of 16 grain size distribution analyses as reported on the attached borehole logs from samples of these materials indicate the following:

Gravel	Average Content	21% (range 0 to 68 %)
Sand	Average Content	54 % (range 30 to 87 %)
Silt	Average Content	25% (range 1 to 67 %)

SPT 'N' values within this layer are typically well in excess of 30, with most values being greater than 50. Accordingly, this material is described as having a dense to very dense degree of compactness. However, at a few locations, some lower values were recorded in the uppermost 2 m, suggesting that some compact conditions occasionally exist near the surface.

3.2.5 Shale Bedrock

Shale bedrock of the Georgian Bay formation was confirmed to be present below the clayey silt till and/or interglacial sand deposits within 17 of the 48 borehole logs presented in Appendix C and is expected to underlie the entire site. Overall, the depth to the top of the shale varies from a low of 4.9 m at BH C28 to greater than 17 m at BH C38. However, in general terms the borehole data suggests that the top of the shale is in the order of 6 to 8 m deep in the vicinity of Renforth Drive, increasing to greater than 15 m to the east of Highway 27 and to even greater depths to the south of Eglinton Avenue along Highway 427. In terms of elevation, the shale appears to be present at about elevation 150 m in the vicinity of Renforth Drive decreasing towards the east to about elevation 135 m east of Highway 27 to the north of Eglinton Avenue and to below elevation 130 m to the south Eglinton Avenue along Highway 427.

The borehole data suggests that the upper portion of the shale is weathered which gives way to more sound material at depth. Available data tends to suggest that the unconfined compressive strength of the intact shale of the Georgian Bay Formation is typically quite strong at between about 15 to 25 MPa. However, this formation is known to contain many sub-layers of dolomite and/or limestone, which can be considerably stronger with unconfined compressive strengths that are often in excess of 100 MPa. Typically, these layers are in the order of 100 to 200 mm thick although thicker layers up to about 400 mm are often present.

3.3 Groundwater

The reported groundwater level within the boreholes upon completion of drilling and about 2 weeks after completion of drilling, indicate that stabilized water table at the site was originally quite high, i.e., about 1 to 2 m below ground surface. However, it should be noted that these measurements are relatively short term and may vary seasonally. It is also possible that the groundwater level within the interchange area may have been lowered since the late 60's in response to the many earth cuts that are present.

4.0 CLOSURE

This report was developed from a larger Foundation Investigation and Design Report that was prepared by DST and dated October 19, 2001. The original report was signed and stamped by two registered Professional Engineers in Ontario, i.e., the principal preparer of the report, Ivan Corbett, P.Eng., Manager of DST Toronto and the reviewer of the report, Mike Fabius, P. Eng., DST's designated contact with the MTO's Foundation Design Branch for the provision of geotechnical foundation services.

TABLE 1
HIGHWAY 401 REHABILITATION,
RENFORTH DRIVE TO HIGHWAY 427
HIGH MAST LIGHTING POLE FOUNDATION STUDY
ORIGIN OF COMPILED BOREHOLES


Compiled Borehole Number	MTO DATABANK INFORMATION		
	Date of Drilling	Original Borehole Number	MTO File Number
C1	April 25, 1967	17	30M11-44
C2	April 27, 1967	16	30M11-44
C3	April 26, 1967	15	30M11-44
C4	July 13, 1967	8	30M11-55
C5	July 19-20, 1967	6	30M11-55
C6	August 4, 1967	6a	30M11-55
C7	August 31, 1967	9	30M11-55
C8	June 29, 1967	4	30M11-55
C9	July 5, 1967	3	30M11-55
C10	July 10, 1967	32	30M11-55
C11	July 5, 7, 10, 1967	33	30M11-55
C12	April 26, 1967	14	30M11-44
C13	July 12, 19, 1967	28	30M11-55
C14	July 10, 11, 1967	27	30M11-55
C15	July 5, 6, 1967	23	30M11-55
C16	July 12, 14, 1967	24	30M11-55
C17	July 10, 1967	22	30M11-55
C18	Dec. 14-15, 1966	26	30M11-53
C19	Dec. 15-16, 1966	24	30M11-53
C20	December 22, 1966	31	30M11-53
C21	December 22, 1966	29	30M11-53
C22	Dec. 20-21, 1966	27	30M11-53
C23	December 16, 1966	30	30M11-53
C24	December 16, 1966	28	30M11-53

TABLE 1
HIGHWAY 401 REHABILITATION,
RENFORTH DRIVE TO HIGHWAY 427
HIGH MAST LIGHTING POLE FOUNDATION STUDY
ORIGIN OF COMPILED BOREHOLES

C25	Dec 16, 19, 1966	34	30M11-53
C26	April 27, 1967	12	30M11-44
C27	April 26, 1967	11	30M11-44
C28	April 26, 1967	10	30M11-44
C29	April 25, 1967	9	30M11-44
C30	June 29, 1967	2	30M11-44
C31	July 13, 14, 1967	37	30M11-53
C32	July 14, 1967	35	30M11-53
C33	April 24, 1967	5	30M11-44
C34	December 13, 1966	17	30M11-53
C35	April 27, 1967	3	30M11-44
C36	April 27, 1967	2	30M11-44
C37	December 12, 1966	15	30M11-53
C38	December 9, 1966	5	30M11-53
C39	Dec. 1, 2, 1966	12	30M11-53
C40	December 3, 1966	13	30M11-53
C41	July 20-21, 1967	47	30M11-53
C42	July 5, 1967	39	30M11-53
C43	July 6, 1967	30	30M11-55
C44	April 25, 1967	8	30M11-44
C45	December 14, 1966	20	30M11-53
C46	April 25, 1967	7	30M11-44
C47	Dec. 12-13, 1966	1	30M11-53
C48	Dec. 13-15, 1966	4	30M11-53

METRIC


PLATE No PLATE
CONT No **2001-0012**
WP No 47-99-00



HIGHWAY 401 REHABILITATION,
RENFORTH DRIVE TO HIGHWAY 427
BORE HOLE LOCATIONS

SHEET

DST
CONSULTING ENGINEERS

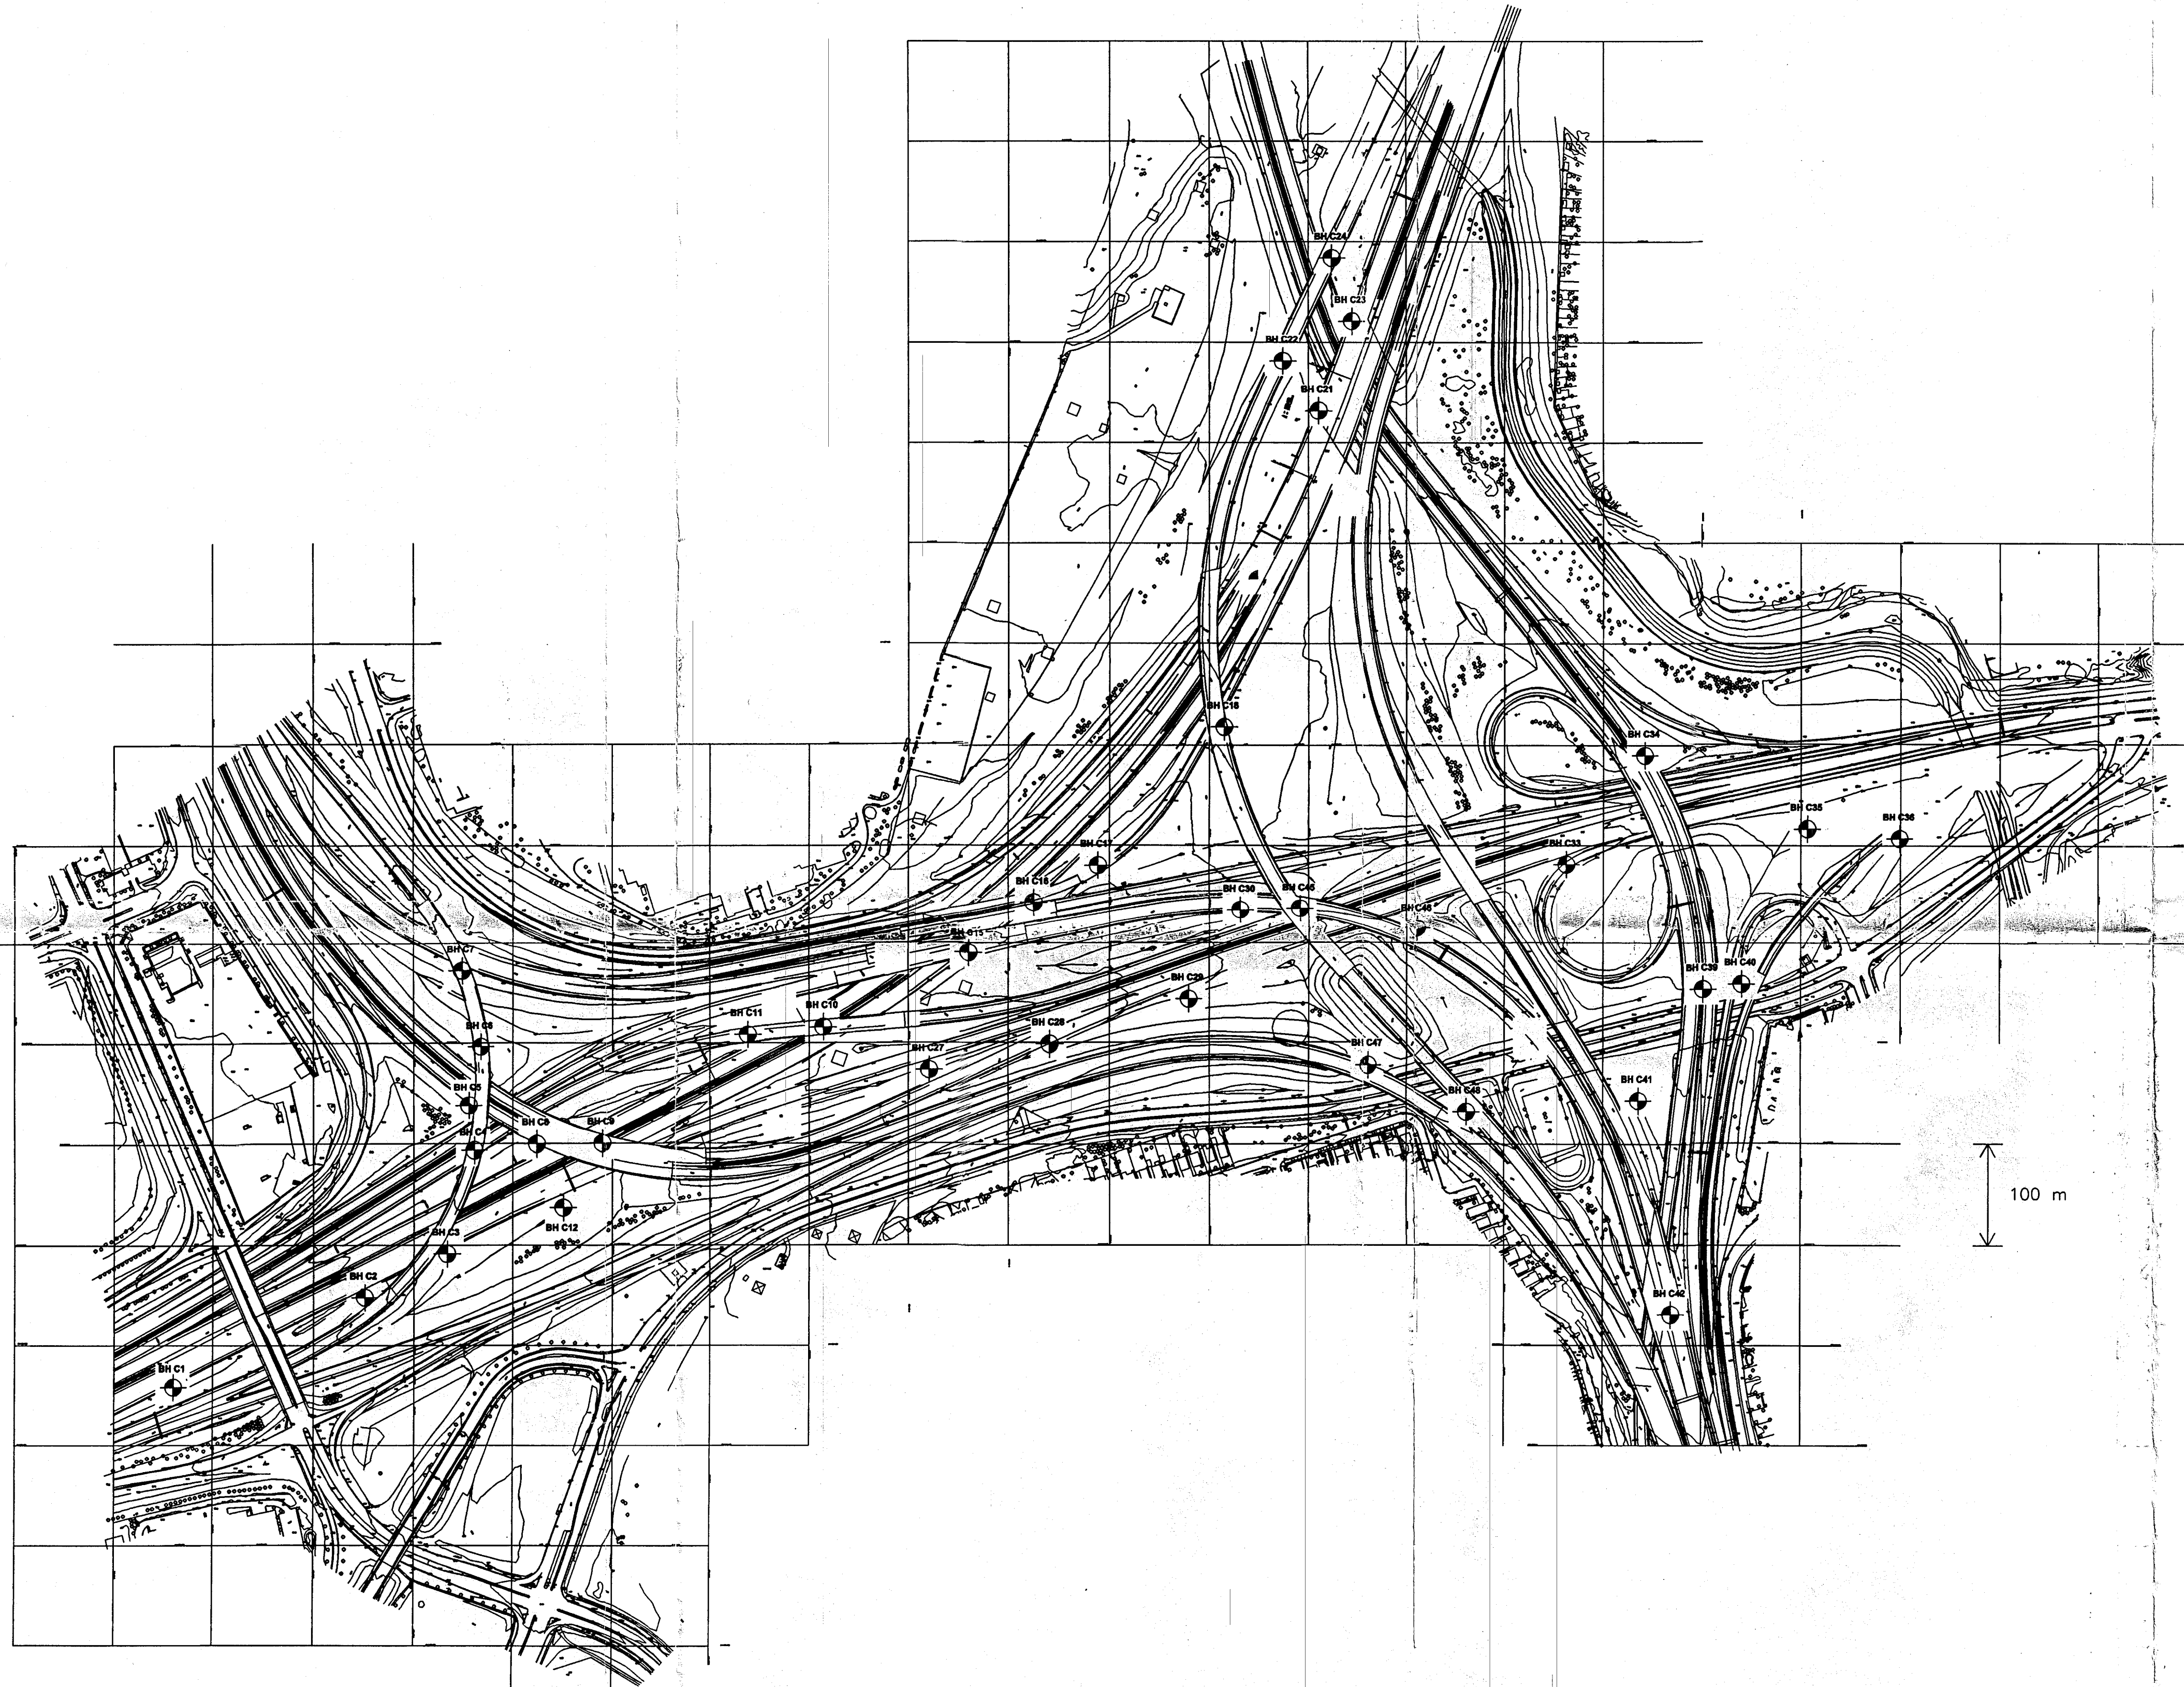

No	ELEVATION	CO-ORDINATES	
		NORTH	EAST
C1	162.52	4 836 457.9	297 360.1
C2	159.14	4 836 547.5	297 550.9
C3	157.43	4 836 591.1	297 633.2
C4	157.15	4 836 693.5	297 660.3
C5	156.24	4 836 737.7	297 654.8
C6	163.83	4 836 796.3	297 667.0
C7	159.41	4 836 872.2	297 648.1
C8	157.19	4 836 699.6	297 724.0
C9	157.43	4 836 700.3	297 789.8
C10	157.64	4 836 816.1	298 014.2
C11	157.06	4 836 808.5	297 938.3
C12	157.40	4 836 636.9	297 750.5
C13	156.76	4 836 836.8	297 970.6
C14	156.18	4 836 882.8	298 084.9
C15	154.14	4 836 889.8	298 160.2
C16	151.97	4 836 942.6	298 225.1
C17	152.67	4 836 980.1	298 288.8
C18	154.84	4 837 117.8	298 415.0
C19	152.19	4 837 264.1	298 448.5
C20	140.60	4 837 342.1	298 542.1
C21	142.59	4 837 431.8	298 510.1
C22	149.90	4 837 481.5	298 474.4
C23	144.00	4 837 520.8	298 543.6
C24	143.59	4 837 583.9	298 523.5
C25	144.69	4 837 656.7	298 557.6
C26	158.74	4 836 721.3	297 975.8
C27	155.66	4 836 772.8	298 120.9
C28	152.20	4 836 798.7	298 241.0
C29	151.24	4 836 843.2	298 379.3
C30	153.31	4 836 934.9	298 431.5
C31	153.71	4 836 980.1	298 654.0
C32	154.35	4 837 036.1	298 619.8
C33	146.82	4 836 981.0	298 762.8
C34	139.08	4 837 089.8	298 842.3
C35	139.08	4 837 016.3	299 006.6
C36	139.81	4 837 006.9	299 099.3
C37	139.20	4 837 070.6	299 180.0
C38	152.31	4 836 798.7	298 727.1
C39	151.36	4 836 853.3	298 901.5
C40	150.05	4 836 858.4	298 940.1
C41	148.59	4 836 743.2	298 835.9
C42	148.13	4 836 530.5	298 869.1
C43	156.33	4 836 823.1	298 095.3
C44	152.64	4 836 865.5	298 436.9
C45	150.11	4 836 936.5	298 491.2
C46	150.48	4 836 915.7	298 611.9
C47	150.14	4 836 778.0	298 560.4
C48	150.00	4 896 732.2	298 661.9

Rev.			HIGHWAY 401/427 INTERCHANGE				DIST 6
	DATE	BY	DESCRIPTION	SUBM'D IC	CHECKED IC	DATE JAN. 24, 2001	
	GEOCRE		No	DRAWN SL	CHECKED MF	APPROVED	DWG 1

APPENDIX A

Statement of Limitations

LIMITATIONS OF REPORT

The conclusions and recommendations presented in this report are based on information determined at the borehole locations. Subsurface and groundwater conditions between and beyond the boreholes may differ from those encountered at the specific locations tested, and conditions may become apparent during construction which were not detected and could not be anticipated at the time of the site investigation.

The design recommendations given in this report are applicable only to the project described in the text and then only if constructed substantially in accordance with details stated in this report. Since all details of the design may not be known, we recommend that we be retained during the final stage to verify that the design is consistent with our recommendations, and that assumptions made in our analysis are valid.

Unless otherwise noted, the information contained herein in no way reflects on environmental aspects of either the site or the subsurface conditions.

The comments given in this report on potential construction problems and possible methods are intended only for the guidance of the designer. The number of boreholes may not be sufficient to determine all the factors that may affect construction methods and costs, e.g. the thickness of surficial topsoil or fill layers may vary markedly and unpredictably. The contractors bidding on this project or undertaking the construction should, therefore, make their own interpretation of the factual information presented and draw their own conclusion as to how the subsurface conditions may affect their work.

DST CONSULTING ENGINEERS INC.

APPENDIX B
Borehole Logs

RECORD OF BOREHOLE No C1

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836457.9 N; 297360.1E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Solid Stem Augers COMPILED BY KN
DATUM Geodetic DATE 25.4.67 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT w _p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa						
162.5	Ground Level							20 40 60 80 100						
0.0	SANDY SILT, very dense.							20 40 60 80 100						
			1	SS	101									
			2	SS	121									0 7 92 1
157.8			3	SS	100									28 54 (18)
4.7	SANDY GRAVEL, very dense.													
157.0			4	SS	96									
5.5	CLAYEY SILT with SAND, fragments of shale, glacial till, hard. Glacial Till													
			5	SS	100									
154.3			6	SS	102									7 19 54 20
8.2	END OF BOREHOLE AT 8.23 m.													

+³, ×³: Numbers refer to Sensitivity
○³% STRAIN AT FAILURE

RECORD OF BOREHOLE No C2

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836547.5 N; 297550.9 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Washboring BX Casing COMPILED BY KN
DATUM Geodetic DATE 27.4.67 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	*N* VALUES			20 40 60 80 100	20 40 60 80 100					
159.1	Ground Level						159							
0.0	CLAYEY SILT with SAND, hard						158							
			1	SS	65		157							
156.7							156							5 87 (8)
2.4	GRAVEL AND SAND, coarse to fine, very dense		2	SS	100		155							
							154							
			3	SS	77		153							68 31 (1)
153.4							152							
5.8	CLAYEY SILT with SAND, hard		4	SS	143		151							
							150							
			5	SS	100		149							
150.9														
8.2	SHALE BEDROCK		6	SS	100									
			7	SS	100									
148.0														
11.1	END OF BOREHOLE AT 11.12 m													

+3, X3: Numbers refer to Sensitivity ○ 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C3

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836591.1 N, 297633.2 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Washboring BX Casing COMPILED BY KN
DATUM Geodetic DATE 26.4.67 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	*N* VALUES			20 40 60 80 100	20 40 60 80 100					
157.4	Ground Level													
0.0	CLAYEY SILT, hard						157							
			1	SS	99		156							
154.4							155							
3.1	GRAVEL AND SAND, coarse to fine, very dense		2	SS	100		154							37 5 36 22
			3	SS	59		153							
152.3							152							
5.2	SILTY SAND, with gravel, grey, very dense Glacial Till		4	SS	100		151							16 66 (18)
150.7							150							
6.7	SHALE BEDROCK		5	SS	100		149							
							148							
147.8			6	SS	100									
9.6	END OF BOREHOLE AT 9.60 m													

+³, X³: Numbers refer to
Sensitivity

○ 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C4

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836693.5 N; 297660.3 E ORIGINATED BY MK
 DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Continuous Flight Auger COMPILED BY KN
 DATUM Geodetic DATE 13.7.67 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT w _p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa							WATER CONTENT (%)
								20 40 60 80 100	20 40 60 80 100						
157.2	Ground Level														
0.0	CLAYEY SILT, with some sand, traces of gravel, stiff to hard						157								
			1	SS	12		156								
			2	SS	31		155								
			3	SS	25		154								
			4	SS	74		153								
			5	SS	100		152								
151.1	CLAYEY SILT with shale fragments						151								
6.1							150								
149.4	BEDROCK														
147.8	END OF BOREHOLE AT 7.86 m														
7.9															

+ 3 x 3 Numbers refer to Sensitivity ○ 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C5

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836737.7 N; 297654.8 E ORIGINATED BY MK
 DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Cont. Flight Auger COMPILED BY KN
 DATUM Geodetic DATE 19.7.67 - 20.7.67 CHECKED BY IC

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT w _p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES		20 40 60 80 100	20 40 60 80 100					
156.2	Ground Level												
0.0	CLAYEY SILT with some sand, traces of gravel, very stiff to hard					156							
			1	SS	30	155							
						154							
			2	SS	19	153							8 23 45 24
			3	SS	15	152							
			4	SS	35	151							
150.6	CLAYEY SILT with fragments of shale, hard					150							
5.6	Glacial Till					149							
			7	RC		148							
147.2	SHALE BEDROCK					147							
9.0			8	RC		146							
144.2						145							
12.0	END OF BOREHOLE AT 12.04 m												

+ 3, X 3; Numbers refer to 3% STRAIN AT FAILURE
 Sensitivity

RECORD OF BOREHOLE No C6

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836796.3 N; 297667.0 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Cont. Flight Auger COMPILED BY KN
DATUM Geodetic DATE 4.8.67 CHECKED BY IC

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE			*N* VALUES	20 40 60 80 100					
163.8	Ground Level												
0.0	FILL, clayey silt, some sand pockets, traces of gravel, brown to grey, stiff to very stiff		1	SS	8								
			2	SS	15								
			3	SS	28								
			4	SS	26								
			5	SS	9								
			6	SS	29								
			7	SS	13								
			8	SS	33								
150.4			9	SS	100								
13.4	CLAYEY SILT with fragments of shale, grey, hard		10	SS	100								
			11	SS	100								
146.9													
16.9	END OF BOREHOLE AT 16.92 m												

+ 3, X 3: Numbers refer to Sensitivity ○ 3% STRAIN AT FAILURE

ON MOT MTO-015.GPJ ON MOT.GDT 19/10/01

RECORD OF BOREHOLE No C7

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836872.2 N; 297648.1 E ORIGINATED BY MK
 DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Cont. Flight Auger COMPILED BY KN
 DATUM Geodetic DATE 31.8.67 CHECKED BY IC

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT NATURAL MOISTURE CONTENT LIQUID LIMIT			UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE			"N" VALUES	20 40 60 80 100	20 40 60 80 100	W _p	W		
159.4	Ground Level												
0.0	CLAYEY SILT with SAND, some organics, traces of gravel, stiff to hard		1	SS	29								
			2	SS	18								
			3	SS	12								
			4	SS	30								
			5	SS	18								
			6	SS	60								
150.6	CLAYEY SILT with fragments of shale, grey, hard		7	SS	100								
8.8			8	SS	100								
147.2	END OF BOREHOLE AT 12.19 m		9	SS	100								
12.2													

+3. X 3. Numbers refer to Sensitivity O 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C8

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836699.6 N; 297724.0 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Cont Flight Auger COMPILED BY KN
DATUM Geodetic DATE 29.6.67 CHECKED BY IC

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT NUMBER	TYPE	*N* VALUES			20 40 60 80 100	20 40 60 80 100					
157.2	Ground Level												
0.0	CLAYEY SILT, some sand, traces of gravel, very stiff to hard												
		1	SS	24									
		2	SS	96									
		3	SS	194									
		4	SS	74									
		5	SS	58									
		6	SS	100									
		7	SS	100									
148.4	SHALE BEDROCK	8	SC	100									
8.8		9	RC										
146.4	END OF BOREHOLE AT 10.76 m												
10.8													

+ 3, X 3, Numbers refer to Sensitivity ○ 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C9

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836700.3 N; 297789.9 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Cont. Flight Auger COMPILED BY KN
DATUM Geodetic DATE 5.7.67 CHECKED BY IC

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT w _p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL							
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE			"N" VALUES	SHEAR STRENGTH kPa						WATER CONTENT (%)						
						20	40	60	80	100	20	40	60	80	100	10	20	30		
157.4	Ground Level																			
0.0	CLAYEY SILT, becoming SANDY SILT to SILTY SAND with GRAVEL, very dense		1	SS	51															
			2	SS	100															
			3	SS	52															
			4	SS	47															
151.0			5	SS	60															
6.4	SHALE BEDROCK		6	RC																
147.8																				
9.6	END OF BOREHOLE AT 9.60 m																			

ON MOT MTO-015.GPJ ON MOT.GDT 19/10/01

+ 3 . X 3. Numbers refer to
Sensitivity

○ 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C10

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836816.1 N: 298014.2 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Cont. Flight Auger COMPILED BY KN
DATUM Geodetic DATE 10.7.67 CHECKED BY IC

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE			*N* VALUES	SHEAR STRENGTH kPa					
157.6	Ground Level						20 40 60 80 100						
0.0	SANDY SILT to SILTY SAND, very dense		1	SS	94								
155.8													
1.9	SAND with gravel becoming GRAVEL with some sand, very dense		2	SS	100								
			3	SS	100								
151.7													
5.9	CLAYEY SILT, with fragments of shale		4	SS	100								
			5	SS	100								
149.6			6	SS	12								
8.0	END OF BOREHOLE AT 8.0 m												

+³, X³: Numbers refer to Sensitivity O³% STRAIN AT FAILURE

RECORD OF BOREHOLE No C11

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836808.5 N: 297938.3 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Cont. Flight Auger COMPILED BY KN
DATUM Geodetic DATE 5.7.67 - 10.7.67 CHECKED BY IC

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT w _p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE			*N* VALUES	20 40 60 80 100					
157.1	Ground Level												
0.0	SANDY SILT, traces of gravel												0 6 93 1
155.3			1	SS	74								
1.7	SAND with gravel, becoming GRAVEL with sand, occasional boulders, very dense		2	SS	25								
152.5			3	SS	74								
4.6	CLAYEY SILT, with sand, and numerous fragments of shale, hard		4	SS	75								
149.1			5	SS	100								
7.9	SHALE BEDROCK												
	WEATHERED												
147.4			6	RC									
9.7	SOUND												
145.3													
11.7	END OF BOREHOLE AT 11.73 m												

ON MOT M10-015.GPJ ON MOT.GDT 19/10/01

+³.X³: Numbers refer to Sensitivity O³% STRAIN AT FAILURE

RECORD OF BOREHOLE No C12

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836636.9 N; 297750.5 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Cont. Flight Auger COMPILED BY KN
DATUM Geodetic DATE 26.4.87 CHECKED BY IC

SOIL PROFILE

SAMPLES

GROUND WATER
CONDITIONS

ELEVATION SCALE

DYNAMIC CONE PENETRATION
RESISTANCE PLOT

SHEAR STRENGTH kPa
O UNCONFINED + FIELD VANE
□ QUICK TRIAXIAL X LAB VANE

PLASTIC LIMIT
NATURAL MOISTURE CONTENT
LIQUID LIMIT
W_p W W_L
WATER CONTENT (%)

UNIT WEIGHT
γ
kN/m³

REMARKS
&
GRAIN SIZE
DISTRIBUTION
(%)
GR SA SI CL

ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES	GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT	SHEAR STRENGTH kPa O UNCONFINED + FIELD VANE □ QUICK TRIAXIAL X LAB VANE	PLASTIC LIMIT NATURAL MOISTURE CONTENT LIQUID LIMIT W _p W W _L WATER CONTENT (%)	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
157.4 0.0	SILTY CLAY TO CLAYEY SILT, hard						157					
			1	SS	58		156					
155.0 2.4	SANDY SILT, traces of gravel, very dense		2	SS	100		155					
							154					
152.8 4.6	SANDY SILT, some gravel and clay, grey Glacial Till		3	SS	52		153					
							152					
151.6 5.8	Shale Bedrock		4	SS	100		151					
							150					
			5	SS	100		149					
148.6 8.8	END OF BOREHOLE AT 8.84 m		6	SS	100							

+³, X³: Numbers refer to Sensitivity O³% STRAIN AT FAILURE

RECORD OF BOREHOLE No C13

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836836.8 N; 297970.6 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Cont. Flight Auger COMPILED BY KN
DATUM Geodetic DATE 12.7.67 - 19.7.67 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT			PLASTIC LIMIT w _p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	*N* VALUES			SHEAR STRENGTH kPa							
								○ UNCONFINED	+ FIELD VANE	□ QUICK TRIAXIAL					
156.8	Ground Level						20	40	60	80	100				
0.0	SAND, some gravel, very dense														
152.3															
4.4	CLAYEY SILT, some sand, gravel and fragments of shale														
150.4															
6.4	SHALE BEDROCK, weathered														

+³, X³: Numbers refer to Sensitivity ○ 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C14

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836882.8 N:298084.9 E ORIGINATED BY MK
 DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Cont. Flight Auger COMPILED BY KN
 DATUM Geodetic DATE 10.7.67 - 11.7.67 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT w _p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	*N* VALUES			SHEAR STRENGTH kPa						
156.2	Ground Level					▽	20 40 60 80 100	20 40 60 80 100	10 20 30					
0.0	CLAYEY SILT, some sand and gravel, hard						○ UNCONFINED + FIELD VANE							
154.4			1	SS	117		□ QUICK TRIAXIAL × LAB VANE							
1.8	SAND, some gravel, very dense													
			2	SS	152									
151.5														
4.7	CLAYEY SILT, some sand, traces of gravel		3	SS	115									
			4	SS	140									
			5	SS	100									
			6	SS	100									
148.7														
7.5	SHALE BEDROCK, weathered					RC								
145.3														
10.9	END OF BOREHOLE AT 10.9 m													

+ 3, × 3: Numbers refer to Sensitivity ○ 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C15

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836889.8 N; 298160.2 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Cont. Flight Auger COMPILED BY KN
DATUM Geodetic DATE 5.7.67 - 6.7.67 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT w _p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa							WATER CONTENT (%)
								○ UNCONFINED □ QUICK TRIAXIAL	+ FIELD VANE × LAB VANE						
154.1	Ground Level							20 40 60 80 100	10 20 30					GR SA SI CL	
0.0	CLAYEY SILT, with sand, traces of gravel, hard						154								
			1	SS	57		153								
			2	SS	96		152								
			3	SS	199		151								
149.9			4	SS	120		150								
4.3	CLAYEY SILT, with numerous shale fragments, hard		5	SS	100		149								
			6	SS	100		148								
			7	SS	100		147								
			8	SS	100		146								
			9	SS	100		145								
143.2			10	RC			144								
11.0	SHALE BEDROCK						143								
141.0							142								
13.1	END OF BOREHOLE AT 13.1 m														

+³, ×³ Numbers refer to Sensitivity ○ 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C16

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836942.6 N; 298225.1 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Cont. Flight Auger COMPILED BY KN
DATUM Geodetic DATE 12.7.67 - 14.7.67 CHECKED BY IC

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE			"N" VALUES	SHEAR STRENGTH kPa					
152.0	Ground Level												
0.0	CLAYEY SILT, with sand and sand seams, traces of gravel, hard		1	SS	49								
			2	SS	130								
			3	SS	123								
			4	SS	130								
146.9	SHALE BEDROCK, weathered		5	BC	100								
5.0													
144.5	END OF BOREHOLE AT 7.50 m												
7.5													

+3, X3

Numbers refer to
Sensitivity

○ 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C17

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836980.1 N: 298228.8 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Cont. Flight Auger COMPILED BY KN
DATUM Geodetic DATE 10.7.67 CHECKED BY IC

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT w _p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE			*N* VALUES	SHEAR STRENGTH kPa					
152.7	Ground Level						20 40 60 80 100	20 40 60 80 100				kN/m ³	GR SA SI C
0.0	CLAYEY SILT, with sand, traces of gravel, hard												
			1	SS	62								
			2	SS	142								
			3	SS	182								
			4	SS	116								
147.2													
5.5	SILTY SAND with gravel, occasional boulders, very dense		5	SS	77								6 45 48 1
			6	SS	100								
145.1													
7.6	CLAYEY SILT with fragments of shale, hard												
143.8			7	SS	100								
8.8	SHALE BEDROCK, weathered												
			8	RC									
141.6													
11.1	END OF BOREHOLE AT 11.12 m												

+3, ×3: Numbers refer to Sensitivity ○ 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C18

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4837117 8 N; 298415.0 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Solid Stem Augers COMPILED BY KN
DATUM Geodetic DATE 14.12.66 - 15.12.66 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT w _p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)			
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	*N* VALUES			SHEAR STRENGTH kPa									
								20 40 60 80 100									
								20 40 60 80 100									
							UNCONFINED + FIELD VANE QUICK TRIAXIAL X LAB VANE		WATER CONTENT (%)		GR SA SI CL						
154.8	Ground Level																
150.0	TOPSOIL																
0.2	CLAYEY SILT with sand, very stiff to hard					▽	154										
			1	SS	39		153										
			2	SS	41		152						3 35 45 17				
			3	SS	30		151										
			4	SS	28		150										
			5	SS	42		149						13 44 31 12				
			6	SS	40		148										
			7	SS	64		147										
			8	SS	100		146										
			9	SS	90		145										
141.4	SANDY SILT, very dense, wet		10	SS	110		144										
139.6	CLAYEY SILT, hard, dry, transition to shale						143										
138.9	END OF BOREHOLE AT 15.4 m						142										
15.4							141										
							140										

+ 3, x 3: Numbers refer to Sensitivity ○ 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C19

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4837264.1 N; 298448.5 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Solid Stem Augers COMPILED BY KN
DATUM Geodetic DATE 15.12.66 - 16.12.66 CHECKED BY IC

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT w _p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE			*N* VALUES	SHEAR STRENGTH kPa					
152.2	Ground Level						20 40 60 80 100						
150.0	TOPSOIL						20 40 60 80 100						
0.2	CLAYEY SILT with sand, brown to grey, hard						20 40 60 80 100						
			1	SS	45								
			2	SS	58								
			3	SS	41								
			4	SS	42								
			5	SS	56								
			6	SS	100								
142.4	SAND AND SILT, trace of gravel, very dense, wet												
			7	SS	60								
140.3	CLAYEY SILT, hard, transition to shale												
139.9	END OF BOREHOLE AT 12.3 m												
12.3													

ON MOT MTO-015.GPJ ON MOT.GDT 19/10/01

+ 3, X 3, Numbers refer to Sensitivity ○ 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C20

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4837342.2 N; 298542.1 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Solid Stem Augers COMPILED BY KN
DATUM Geodetic DATE 22.12.66 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	*N* VALUES			SHEAR STRENGTH kPa ○ UNCONFINED + FIELD VANE □ QUICK TRIAXIAL × LAB VANE						
140.6	Ground Level							20 40 60 80 100						
140.0	TOPSOIL							20 40 60 80 100						
0.2	SANDY SILT, traces of clay, stiff		1	SS	12									8 32 46 14
138.2	CLAYEY SILT with shale fragments, hard		2	SS	128									
2.4			3	SS	33									
134.4	END OF BOREHOLE AT 6.2 m													
6.2														

+3, X3: Numbers refer to Sensitivity
O 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C21

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4837431.8 N: 298510.1 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Solid Stem Augers COMPILED BY KN
DATUM Geodetic DATE 22.12.66 CHECKED BY IC

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE			*N VALUES	20					
142.6	Ground Level												
140.0	TOPSOIL												
0.2	FILL- silty sand, loose												
140.2													
2.4	CLAYEY SILT with SAND, hard												
138.3													
4.3	END OF BOREHOLE AT 4.3 m												

+3, X3, Numbers refer to Sensitivity O 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C22

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4837481.5 N; 298474.4 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Solid Stem Augers COMPILED BY KN
DATUM Geodetic DATE 21.12.66 - 21.12.66 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT w _p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa						
149.9	Ground Level							20 40 60 80 100						
149.9	TOPSOIL							20 40 60 80 100						
0.2	CLAYEY SILT with sand, hard													
			1	SS	112		149							
			2	SS	62		148							
			3	SS	42		147							
			4	SS	55		146							
			5	SS	45		145							8 37 39 16
			6	SS	40		144							
			7	SS	40		143							
			8	SS	70		142							
141.4	SILTY SAND, with traces of gravel, very dense		9	SS	100		141							8 48 37 7
139.5	CLAYEY SILT with sand, hard						140							
10.4							139							
							138							
							137							
136.0	END OF BOREHOLE AT 13.89 m													
13.9														

+3, X3, Numbers refer to Sensitivity ○ 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C23

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4837520.8 N; 298543.6 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Solid Stem Augers COMPILED BY KN
DATUM Geodetic DATE 16.12.66 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			20 40 60 80 100	20 40 60 80 100					
144.0	Ground Level													
143.9	TOPSOIL AND FILL													
0.3	CLAYEY SILT with SAND, brown, stiff		1	SS	8									
141.6	SILTY SAND, trace of gravel, compact		2	SS	29									
139.2	CLAYEY SILT with sand, grey, hard		3	SS	62									
4.8	Transition to Shale		4	SS	110									
136.4	END OF BOREHOLE AT 7.56 m		5	SS	110									
7.6														

+³, X³: Numbers refer to Sensitivity ○ 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C24

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4837583.9 N; 298523.5 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Solid Stem Augers COMPILED BY KN
DATUM Geodetic DATE 16.12.66 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT w _p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	*N* VALUES			SHEAR STRENGTH kPa						
143.6	Ground Level							20 40 60 80 100						
140.0	TOPSOIL							20 40 60 80 100						
0.2	CLAYEY SILT with sand, brown, hard		1	SS	34	▽	143							
141.2							142							
2.4	SILTY SAND, grey, very dense		2	SS	74		141							1 62 32 5
							140							
138.9			3	SS	54		139							
4.7	CLAYEY SILT with sand, some shale fragments, hard, dry		4	SS	70		138							
			5	SS	69	137								
			6	SS	110	136							7 50 24 19	
						135								
						134								
132.9			7	SS	53	133								
10.7	END OF BOREHOLE AT 10.7 m													

+ 3, X 3: Numbers refer to Sensitivity ○ 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C25

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4837656.7 N; 298557.6 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Washboring BX Casing COMPILED BY KN
DATUM Geodetic DATE 16.12.66 - 19.12.66 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	*N* VALUES			20 40 60 80 100	20 40 60 80 100					
144.7	Ground Level													
140.8	TOPSOIL													
0.2	CLAYEY SILT, trace of sand, stiff to very stiff		1	SS	13		144							
			2	SS	24		143							
							142							
140.7	GRAVELLY SAND, trace of silt, very dense		3	SS	57		141							
							140							
138.9	CLAYEY SILT with sand, hard		4	SS	70		139							
							138							
136.8	SHALE BEDROCK		5	SS	80		137							
7.9			6	RC			136							
			7	RC			135							
133.7	END OF BOREHOLE AT 11.0 m						134							
11.0														

+³, X³: Numbers refer to Sensitivity ○³% STRAIN AT FAILURE

RECORD OF BOREHOLE No C26

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836721.3 N: 297975.8 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Cont. Flight Auger COMPILED BY KN
DATUM Geodetic DATE 27.4.67 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	*N* VALUES			20	40	60	80	100					
158.7 0.0	SANDY SILT TO SILTY SAND, very dense		1	SS	44		158										
156.0 2.7	GRAVELLY SAND becoming GRAVEL with some sand, very dense		2	SS	50		157										
			3	SS	90		156										
152.5 6.2	END OF BOREHOLE AT 6.22 m		4	SS	150		155										
151.1 7.6	SHALE BEDROCK in Test Pit						154										
							153										
							152										

+³, X³: Numbers refer to Sensitivity ○^{3%} STRAIN AT FAILURE

RECORD OF BOREHOLE No C27

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836772.8 N; 298120.9 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Cont. Flight Auger COMPILED BY KN
DATUM Geodetic DATE 26.4.67 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT			UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			20 40 60 80 100	20 40 60 80 100	20 40 60 80 100		
155.7 0.0	SANDY SILT TO SILT, very dense											
154.0 1.7	GRAVEL, SAND and SILT, very dense		1	SS	100							
152.5 3.2	CLAYEY SILT TO SANDY SILT, grey Glacial Till		2	SS	50							
			3	SS	150							
150.0 5.6	SHALE BEDROCK WITH LIMESTONE		4	SS	100							
			5	SS	140							
			6	SS	100							
146.1 9.6	END OF BOREHOLE AT 9.60 m											

+³, X³: Numbers refer to Sensitivity ○³% STRAIN AT FAILURE

RECORD OF BOREHOLE No C28

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836798.7 N: 298241.0 E ORIGINATED BY MK
 DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Cont. Flight Auger COMPILED BY KN
 DATUM Geodetic DATE 26.4.67 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT w_p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w_L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	*N* VALUES			20 40 60 80 100	20 40 60 80 100					
152.2 0.0	SANDY SILT TO SILT with some clay, very dense						152							
			1	SS	67		151							
							150							
148.9 3.3	CLAYEY SILT, grey, hard Glacial Till		2	SS	50		149						14 20 50 16	
							148							
147.3 4.9	SHALE BEDROCK		3	SS	100		147							
							146							
			4	SS	150		145							
144.4 7.8	END OF BOREHOLE AT 7.77 m		5	SS	200									

+3, X3: Numbers refer to Sensitivity O 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C29

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836843.2 N; 298379.3 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Cont. Flight Auger COMPILED BY KN
DATUM Geodetic DATE 25.4.67 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT			UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			20 40 60 80 100	20 40 60 80 100	20 40 60 80 100		
151.2							151					
0.0	SANDY SILT with some clay and gravel, very dense		1	SS	94		150					
			2	SS	100		149					
							148					
146.7			3	SS	100		147					4 29 53 14
4.6	SANDY SILT with some clay and shale fragments, very dense Glacial Till		4	SS	100		146					
							145					8 42 39 11
			5	SS	100		144					
143.1												
8.1	END OF BOREHOLE AT 8.1 m											

+³ ×³ Numbers refer to Sensitivity ○ 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C30

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836935.0 N: 298431.5 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Cont. Flight Auger COMPILED BY KN
DATUM Geodetic DATE 29.6.67 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT w _p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa ○ UNCONFINED + FIELD VANE □ QUICK TRIAXIAL × LAB VANE							WATER CONTENT (%)
153.3 0.0	CLAYEY SILT, traces of sand and gravel, hard														
			1	SS	30										
			2	SS	58										
			3	SS	47										
			4	SS	51										
			5	SS	40										
			6	SS	46										
			7	SS	150										
144.6 8.7	SILT TO SILTY SAND, traces of gravel, very dense		8	SS	197									10 35 47 8	
			9	SS	203										
			10	SS	125										
139.4 13.9	END OF BOREHOLE AT 13.3 m		11	SS	140									7 39 45 9	

+³, x³: Numbers refer to Sensitivity ○ 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C31

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836980.1 N; 298654.0 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Cont. Flight Auger COMPILED BY KN
DATUM Geodetic DATE 13.7.67 - 14.7.67 CHECKED BY IC

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE			20	40	60	80	100		
153.7	Ground Level												
0.0	CLAYEY SILT, some sand, trace of gravel, occasional cobbles, hard												
			1	SS	85								
			2	SS	150								
			3	SS	71								
			4	SS	64								
			5	SS	65								
			6	SS	68								
			7	SS	82								
			8	SS	95								
142.7	SILTY SAND with gravel, very dense		9	SS	110								
11.0			10	SS	100								
			11	SS	100								
			12	SS	115								
138.4	END OF BOREHOLE AT 15.33 m												
15.3													

+ 3 x 3 Numbers refer to Sensitivity ○ 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C32

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4837036.1 N; 298169.8 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Cont. Flight Auger COMPILED BY KN
DATUM Geodetic DATE 14.7.67 CHECKED BY IC

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT NATURAL MOISTURE CONTENT LIQUID LIMIT			UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE			*N* VALUES	20 40 60 80 100	20 40 60 80 100	W _p	W		
154.4 0.0	Ground Level CLAYEY SILT, some sand, trace of gravel, hard												
			1	SS	73								
			2	SS	76								
			3	SS	83								
			5	SS	115								
			6	SS	44								
			7	SS	64								
			8	SS	56								
			9	SS	91								
			10	SS	100								
			11	SS	120								
139.4 14.9	CLAYEY SILT with fragments of shale, hard												
137.4 17.0	END OF BOREHOLE AT 16.95 m												

+³, X³, Numbers refer to Sensitivity O³% STRAIN AT FAILURE

RECORD OF BOREHOLE No C33

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 48369801.0 N; 298762.8 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Cont. Flight Auger COMPILED BY KN
DATUM Geodetic DATE 24.4.87 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT w _p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)		
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	*N* VALUES			20 40 60 80 100	20 40 60 80 100						10 20 30	
SHEAR STRENGTH kPa								20 40 60 80 100							10 20 30	
○ UNCONFINED + FIELD VANE																
□ QUICK TRIAXIAL x LAB VANE																
146.8	Ground Level															
0.0	SANDY SILT to SILT with traces of gravel and clay, very dense															
			1	SS	26											
			2	SS	45											
			3	SS	40											
			5	SS	127											
			6	SS	74											
140.7																
6.1	SILTY SAND, some clay, grey, very dense		7	SS	87									8 57 (35)		
			8	SS	135											
137.7																
9.1	SHALE FRAGMENTS		9	SS	125									12 21 45 22		
137.2																
9.6	END OF BOREHOLE AT 9.60 m															

+ 3 X 3: Numbers refer to
Sensitivity ○ 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C34

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4837089.8 N; 298842.3 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Solid Stem Augers COMPILED BY KN
DATUM Geodetic DATE 13.12.66 CHECKED BY IC

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT w _p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE			*N VALUES	20 40 60 80 100					
139.1 0.0	Ground Level SAND, trace of silt, loose to compact												
			1	SS	7								
			2	SS	22								
135.4 3.7	CLAYEY SILT with sand, hard												
133.0 6.0	END OF BOREHOLE AT 6.04 m												

+ 3, x 3. Numbers refer to Sensitivity O 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C35

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4837016.3 N; 299006.6 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Bombardier Flight Auger COMPILED BY KN
DATUM Geodetic DATE 27.4.67 CHECKED BY IC

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT w _p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE			20 40 60 80 100	20 40 60 80 100					
139.1	Ground Level												
0.0	SANDY SILT to SILTY SAND, traces of gravel and clay, very dense												
			1	SS	9								
			2	SS	50								
			3	SS	64								
			4	SS	139								
131.9	CLAYEY SILT with shale, grey, hard												
7.2													
130.6	END OF BOREHOLE AT 8.53 m												
8.5													

+3. X 3; Numbers refer to Sensitivity ○ 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C36

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4837006.9 N; 299099.3 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Continuous Flight Auger COMPILED BY KN
DATUM Geodetic DATE 27.4.67 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT				UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			20 40 60 80 100	20 40 60 80 100	20 40 60 80 100	20 40 60 80 100		
139.8 0.0	Ground Level SANDY SILT with gravel, trace of clay, very dense												
			1	SS	45		139						
							138						
			2	SS	61		137						15 16 65 4
							136						
							135						
							134						
132.8 7.0	SANDY SILT with shale fragments and clay, hard		5	SS	100		133						35 29 25 11
							132						
130.6 9.2	END OF BOREHOLE AT 9.20 m		6	SS	100		131						

+³, ×³: Numbers refer to Sensitivity ○ 3% STRAIN AT FAILURE

METRIC

+³, ×³: Numbers refer to Sensitivity ○^{3%} STRAIN AT FAILURE

RECORD OF BOREHOLE No C38

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836798.7 N; 298727.1 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Solid Stem Augers COMPILED BY KN
DATUM Geodetic DATE 9.12.66 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	*N* VALUES			20 40 60 80 100	20 40 60 80 100					
152.3	Ground Level						152							
150.9	TOPSOIL						151							
0.2	CLAYEY SILT with sand, brown to grey, hard		1	SS	68		150							
			2	SS	96		149							
			3	SS	79		148							6 33 46 15
			4	SS	64		147							
			5	SS	65		146							
			6	SS	88		145							
			7	SS	100		144							
			8	SS	100		143							
			9	SS	100		142							
			10	SS	100		141							
			11	SS	100		140							
			12	SS	100		139							
			13	SS	100		138							
			14	SS	100		137							
			15	SS	100		136							
137.7	CLAYEY SILT, hard, dry													
14.6	Transition to Shale													
135.5	END OF BOREHOLE AT 16.86 m													
16.9														

+3, X3: Numbers refer to Sensitivity
O 3% STRAIN AT FAILURE

ON MOT MTO-015.GPJ ON MOT GDT 19/10/01

RECORD OF BOREHOLE No C39

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836853.3 N; 298901.5 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Solid Stem Augers COMPILED BY KN
DATUM Geodetic DATE 1.12.66 - 2.12.66 CHECKED BY IC

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE			"N" VALUES	20 40 60 80 100					
151.4	Ground Level												
150.0	TOPSOIL												
0.2	CLAYEY SILT with SAND, brown to grey, hard												
			1	SS	54								
			2	SS	85								
			3	SS	73								6 39 39 16
			4	SS	54								
			5	SS	37								
			6	SS	70								3 40 40 17
141.3	END OF BOREHOLE AT 10.06 m												

+3, X3, Numbers refer to Sensitivity ○ 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C40

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836858.4 N; 298940.2 E ORIGINATED BY MK
 DIST 6 HWY 401/427 interchange BOREHOLE TYPE Solid Stem Augers COMPILED BY KN
 DATUM Geodetic DATE 3.12.66 CHECKED BY ic

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT w _p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	*N* VALUES			SHEAR STRENGTH kPa							WATER CONTENT (%)
								○ UNCONFINED □ QUICK TRIAXIAL	+ FIELD VANE x LAB VANE						
150.1	Ground Level						20 40 60 80 100								
149.9	TOPSOIL														
0.2	CLAYEY SILT with sand, occasional cobbles, brown to grey, hard to very stiff		10	AS											
			1	SS	52										
			2	SS	50									3 31 47 19	
			3	SS	29										
			4	SS	33									6 31 47 16	
			5	SS	21										
140.6			6	SS	31										
9.4	SILTY SAND with gravel, dense to very dense		7	SS	50									22 41 32 5	
138.8															
11.3	END OF BOREHOLE AT 11.3 m														

+³, ×³: Numbers refer to Sensitivity ○³% STRAIN AT FAILURE

RECORD OF BOREHOLE No C41

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836743.2 N: 298835.9 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Continuous Flight Auger COMPILED BY KN
DATUM Geodetic DATE 20.7.67 - 21.7.67 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			20 40 60 80 100	20 40 60 80 100					
148.6	Ground Level													
0.0	CLAYEY SILT, some sand, trace of gravel, hard													
			1	SS	88									
			2	SS	95									
			3	SS	83									
			4	SS	62									
			5	SS	57									
138.4			6	SS	47									
10.2	SANDY SILT, trace of gravel, very dense		7	SS	40									
134.8														
13.8	END OF BOREHOLE AT 13.8 m													

+³, X³: Numbers refer to Sensitivity ○ 3% STRAIN AT FAILURE

1910001 GDT MKI NO PRESENTATION DATE 1910001

RECORD OF BOREHOLE No C42

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836530.5 N: 298869.1 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Continuous Flight Auger COMPILED BY KN
DATUM Geodetic DATE 5.7.67 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT w _p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa	WATER CONTENT (%)					
148.1	Ground Level													
0.0	CLAYEY SILT, some sand, trace of gravel, hard													
			1	SS	51									
			2	SS	140									
			3	SS	60									
			4	SS	69									
			5	SS	77									
			6	SS	155									
			7	SS	75									
			8	SS	114									
			9	SS	26									
137.1	SILT to SANDY SILT, very dense		10	SS	200									
136.2	END OF BOREHOLE AT 11.2 m													
11.9														

+³, ×³: Numbers refer to Sensitivity
○ 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C43

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836823.1 N; 298095.3 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Cont. Flight Auger COMPILED BY KN
DATUM Geodetic DATE 6.7.67 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			20 40 60 80 100	20 40 60 80 100					
156.3	Ground Level						156							
0.0	CLAYEY SILT traces of sand and gravel, hard		1	SS	47		155							
153.9							154							
2.4	SILTY SAND with gravel, very dense		2	SS	140		153							
152.6							152							
3.7	CLAYEY SILT with numerous shale fragments		3	SS	98		151							
							150							
			4	SS	100		149							
			5	SS	100		148							
148.6			6	SS	110		147							
7.7	SHALE BEDROCK		7	RC										
146.7														
9.6	END OF BOREHOLE AT 9.63 m													

+3, X3, Numbers refer to Sensitivity O 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C44

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836865.5 N; 298436.9 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Cont. Flight Auger COMPILED BY KN
DATUM Geodetic DATE 25.4.87 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			20 40 60 80 100	20 40 60 80 100					
152.6	Ground Level													
0.0	SANDY SILT with some clay and gravel, very dense		1	SS	39		152							
							151							
			2	SS	100		150						8 32 46 14	
							149							
148.1	SANDY SILT traces of clay and gravel, grey, very dense		3	SS	32		148							
4.6	Glacial Till						147						12 37 45 6	
			4	SS	35		146							
							145							
			5	SS	100		144							
143.0	END OF BOREHOLE AT 9.60 m		6	SS	100									
9.6														

+³, ×³: Numbers refer to Sensitivity ○ 3% STRAIN AT FAILURE

ON MOT MTO-015.GPJ ON MOT.GDT 19/10/01

RECORD OF BOREHOLE No C45

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836936.5 N; 298491.2 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Solid Stem Augers COMPILED BY KN
DATUM Geodetic DATE 14.12.66 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	*N* VALUES			20 40 60 80 100	20 40 60 80 100					
150.1	Ground Level						150							
149.8	TOPSOIL						149							
0.3	CLAYEY SILT with sand, stiff to hard, brown to grey Glacial Till		1	SS	24		148							
			2	SS	36		147							
			3	SS	80		146							
			4	SS	100		145							
			5	SS	100		144							
			6	SS	100		143							
140.7	SITLY SAND, trace of clay and gravel, very dense, damp						142							7 36 43 14
9.4							141							
139.3	END OF BOREHOLE AT 10.79 m						140							8 46 36 10
10.8														

+3, x3 Numbers refer to Sensitivity ○ 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C46

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836915.8 N; 298611.9 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Washboring BX Casing COMPILED BY KN
DATUM Geodetic DATE 25.4.67 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT w_p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w_L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	*N* VALUES			SHEAR STRENGTH kPa 20 40 60 80 100 ○ UNCONFINED + FIELD VANE □ QUICK TRIAXIAL x LAB VANE						
150.5 0.0	Ground Level CLAYEY SILT, trace of gravel, hard		1	SS	50									
			2	SS	100									
146.5 4.0	CLAYEY SILT with sand, hard Glacial Till		3	SS	67									
			4	SS	40									
			5	SS	85									
			6	SS	50									
140.9 9.6	END OF BOREHOLE AT 9.60 m													

+3, X3: Numbers refer to
Sensitivity

O 3% STRAIN AT FAILURE

RECORD OF BOREHOLE No C47

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836778.0 N; 298560.4 E ORIGINATED BY MK
 DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Solid Stem Augers COMPILED BY KN
 DATUM Geodetic DATE 12.12.66 - 13.12.66 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT w _p	NATURAL MOISTURE CONTENT w	LIQUID LIMIT w _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	*N* VALUES			SHEAR STRENGTH kPa						
150.1	Ground Level							20 40 60 80 100	20 40 60 80 100					
0.0	CLAYEY SILT with sand, brown to grey, hard Glacial Till						150							
			1	SS	50		149							
			2	SS	100		148							
			3	SS	67		147							
			4	SS	48		146							
			5	SS	100		145							
			6	SS	100		144							4 39 40 17
			7	SS	100		143							
			8	SS	100		142							
			9	SS	100		141							
139.5			10	SS	100		140							
10.7	SANDY SILT, trace of gravel and clay, very dense						139							
							138							7 38 49 6
							137							
							136							
134.9							135							
15.2	END OF BOREHOLE AT 15.24 m													

+³, ×³ Numbers refer to Sensitivity ○³% STRAIN AT FAILURE

RECORD OF BOREHOLE No C48

1 OF 1

METRIC

W.P. 47-99-00 LOCATION 4836732.0 N: 298661.9 E ORIGINATED BY MK
DIST 6 HWY 401/427 Interchange BOREHOLE TYPE Washboring BX Casing COMPILED BY KN
DATUM Geodetic DATE 13.12.66 - 15.12.66 CHECKED BY IC

SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa							WATER CONTENT (%)
								○ UNCONFINED □ QUICK TRIAXIAL	+ FIELD VANE × LAB VANE						
150.0	Ground Level														
0.0	FILL- TOPSOIL and CLAYEY SILT with SAND						149								
148.8							148								
1.2	CLAYEY SILT with sand, brown to grey, hard Glacial Till		1	SS	45		147								
			2	SS	79		146								
			3	SS	50		145								
			4	SS	54		144							4 35 42 19	
			5	SS	90		143								
			6	SS	70		142								
							141								
139.8							140								
10.2	GRAVELLY SAND with some silt, very dense Glacial Till		7	SS	100		139							40 45 (15)	
			8	SS	115		138								
							137								
136.2															
13.8	END OF BOREHOLE AT 13.79 m														

+³, ×³ Numbers refer to Sensitivity O³% STRAIN AT FAILURE

Foundation Investigation Report
for
Highway 401 Rehabilitation
Highway 27 Overpass Reconstruction
W.P. 47-99-00, Site 37-815
Central Region

The following report is a copy of the factual information from the Foundation Investigation and Design Report for WP 201-62-1, Contract 68-24. The foundation investigation report was prepared for the existing structure by the MTO Foundations Unit and represents the subsurface conditions for the proposed reconstruction of the existing Highway 401 overpass structure at Highway 27.

Imperial units of measure are used in the report and on the Record of Borehole sheets. The original ground elevations shown on the borehole logs may differ from present day elevations as a result of the construction of the existing structures.

This report contains the general subsurface conditions across the entire interchange, the Record of Borehole sheets pertinent to the structure, and the location of the borings in plan.



D. Dundas

D. Dundas, P.Eng.
Sr. Foundation Engineer

FOUNDATION INVESTIGATION REPORT
For
The Proposed Hwy. #401, Hwy. #27 and
Richview Expressway Interchange
District #6 (Toronto)
"Contract #7 (Yellow)"
W.J. 66-F-102 -- W.P. 201-62-1

1. INTRODUCTION:

In a memo, dated November 24, 1966, the Regional Bridge Location Engineer, Mr. W. S. Melinyshyn, requested a foundation investigation at the proposed site of Hwy. #401, Hwy. #27 and Richview Expressway interchange.

The request covers Contract #7 (Yellow), which is the first part of the whole complex of the proposed interchange and Hwy. #27 improvement, and contains some 16 bridges. Due to the magnitude of the project and the very tight time schedule, it was agreed that a conditional report be submitted only, based on a limited number of boreholes at each proposed structure.

After the exact locations of the footings and the geometrics for the bridges are made available, it is intended to review this report, and additional investigation will be carried out, if necessary. A supplementary report will likely follow these studies.

The field work, laboratory test program and the preparation of the geotechnical data sheets for the boreholes were undertaken by Dominion Soil Investigation Ltd. The boreholes were located and surveyed in the field by personnel from the construction staff of District #6.

Presented in this report are the results of the investigation, together with the evaluation of the soil stratigraphy and the recommendations pertaining to the foundations.

cont'd. /2 ...

2. DESCRIPTION OF THE SITE:

A large part of the area is occupied by the existing interchange of Hwy. #401 and Hwy. #27, the vicinity being generally a built up residential, light industrial and farming zone.

The site under investigation, belongs to the physiographic region known as the "South Slope", forming part of the belt of the till plain and moraine, south of "Peel Plain". The terrain of this portion of the region consists of ground moraines with irregular knolls and hollows.

3. FIELD INVESTIGATION PROCEDURE:

Some 34 sampled boreholes and, adjacent to the borings, 34 dynamic cone penetration tests were carried out during the course of the field investigation. The soils exploration was performed by means of three continuous flight augers and two conventional diamond core drills adapted for soil sampling purposes. 2-inch O.D. split-spoon samplers were used to recover soil samples, advanced by a free falling hammer of 140 lb., utilizing an energy of 350 ft.-lb. Usually, two boreholes were placed in the vicinity of each proposed structure. The soil stratigraphy at the locations of the future piers is, therefore, not exact; in fact, may be subject to considerable error.

The locations and elevations of the borings, as well as the soil profiles along the individual structures, are presented on Drawing #66-F-102A and #66-F-102B.

4. SOIL CONDITIONS:

4.1) General:

The entire area investigated, is covered by deposits of glacial till of the Wisconsin, or more recent age. From the engineering standpoint, two main strata may be recognized - i.e., a fine-grained cohesive, and coarse-grained granular layer.

cont'd. /3 ...

4. SOIL CONDITIONS: (cont'd.) ...

4.1) General: (cont'd.) ...

In their undisturbed state the deposits are usually hard or very dense; at certain locations, however, due to recent fills or other disturbances, firm to stiff material was also encountered.

Grey shale bedrock underlies the overburden.

Field and laboratory tests were performed on representative soil specimens, the results of which are plotted on the geotechnical data sheets accompanying this report. The description of the various layers is presented as follows:

4.2) Clayey Silt (Glacial Till):

The cohesive portion of the glacial till was variously identified to be clayey silt with sand and traces of gravel, clayey silt with layers of cobbles and boulders, clayey silt with gravel, etc. The layer exhibits slight plasticity, having an average value of plastic limit of 14% and liquid limit of 21%. The natural moisture content usually falls below the plastic limit, averaging about 10%. The grain-size analyses of the samples show great variations, so characteristic of the glacial drifts. The range of the constituent grain sizes expressed as a percentage of weight, are listed below:

Gravel	:	0	-	16%
Sand	:	12	-	46%
Silt	:	24	-	59%
Clay	:	12	-	26%

The consistency of the clayey silt is generally hard, indicated by penetration 'N' values much in excess of 100 blows/ft. In certain boreholes, consistencies of soft to very stiff, were also observed - usually within the upper portion.

cont'd. /4 ...

4. SOIL CONDITIONS: (cont'd.) ...

4.3) Sands and Silts:

The granular variety of the subsoil was even more heterogeneous than the cohesive. Based on the grain-size distribution of the samples tested, the soils within the main stratum were specified to be sandy silts, silty sands, fine sands, gravelly sands with traces of silt, etc. The granular material usually appears beneath the cohesive one and exhibits a very dense relative density, corresponding to 'N' values in excess of 100 blows/ft. penetration. The upper and lower limits of the observed natural moisture contents and the constituent grains of the samples, are as follows:

		%
Natural Moisture		0 - 21
Grain Size Distribution	Gravel	0 - 40
	Sand	22 - 87
	Silt	13 - 62
	Clay	0 - 13

4.4) Bedrock:

Grey shale bedrock was proved by diamond drilling for a depth of 10 ft. at three borehole locations. The elevation of the bedrock was found to vary between 425 and 449 ft., corresponding to depths of 55 - 26 ft. below ground level.

cont'd. /5 ...

5. GROUNDWATER CONDITIONS:

Groundwater was established in every borehole at relatively shallow depths. The depth of water was measured to lie between 0 and 15 ft. below existing ground. The average depth of groundwater may be taken to be 2 - 3 ft. below ground level.

OLD REFERENCE NO. 6-11-11
Your Ref. No. W.J. 66-F-102

GEOTECHNICAL DATA SHEET FOR BOREHOLE . 27 .

CLIENT D. H. O.
PROJECT HWYS. 401, 27 & RICHVIEW EXPWY. INTERCHANGE
LOCATION 870, 273 N; 975, 195 E.
DATUM ELEVATION G. S. C.

METHOD OF BORING AUGERING
DIAMETER OF BOREHOLE 3 1/2"
DATE DEC 20-21, 1966
W F 201 - 62 - 1

ENCLOSURE NO.

ELEVATION ft	DEPTH feet	STRATIFICATION DESCRIPTION	STRATIFICATION SYMBOL	SAMPLES			PENETRATION RESISTANCE blows per foot					CONSISTENCY water content %				REMARKS
				NUMBER	TYPE	N ₆₀ Advance of Sample	20	40	60	80	100	PL	W	LI		
							SHEAR STRENGTH lbs. sq. ft.					2.0 4.0 6.0 8.0				
491.8	0	GROUND SURFACE														
		TOPSOIL														
490																
	5															
485		CLAYEY		1	S.S.	112						0				
	10	SILT brown														
480		grey		2	S.S.	62						0-1				
		with														
	15	sand														
475		(glacial till)		3	S.S.	42						0			GR. 8% ; SA. 37% SI. 39% ; CL. 16%	
	20	hard														
470				4	S.S.	55						0				
	25															
465				5	S.S.	45						0-1				
	30	SILTY														
460		SAND		6	S.S.	60/4"						0			GR. 8% ; SA. 48% SI. 37% ; CL. 7%	
	35	with a trace														
		of gravel.														
	40	very dense														
455		CLAYEY SILT		7	S.S.	70/4"						0-1				
		with sand.														
450		(glacial till)		8	S.S.	70/6"						0-1				
		hard														
445		END OF BOREHOLE		9	S.S.	100/6"						0				
	50															

VERTICAL SCALE 1 IN. = 5 FT

DOMINION SOIL INVESTIGATION LIMITED

MADE D.A.M. by K. K. K.

GEOTECHNICAL DATA SHEET FOR BOREHOLE . 28 .

OUR REFERENCE NO. 6-11-11
Your Ref. No. W.J. 66-F-102

CLIENT: D.H.O.

PROJECT: HWYS. 401, 27 & RICHVIEW EXPWY INTERCHANGE

LOCATION: 870, 609 N, 979, 356 E.

DATUM (ELEVATION): G. S. C

METHOD OF BORING: AUGERING

DIAMETER OF BOREHOLE: 3 1/2"

DATE: DEC. 16, 1966

W.P. 201-52-1

ENCLOSURE NO.

ELEVATION ft.	DEPTH ft.	STRATIFICATION DESCRIPTION	STRATIFICATION SYMBOL	SAMPLES			PENETRATION RESISTANCE blows per foot				CONSISTENCY water content %				REMARKS
				NUMBER	TYPE	N ₆₀ or Advance of Sampler	2.0	4.0	6.0	8.0	100	2.0	4.0	6.0	

471.1	0	GROUND SURFACE														
470		TOPSOIL														
	5	CLAYEY SILT with sand firm to v. stiff brown - slightly weathered (glacial till)		1	SS	34										
460	10	SILTY SAND very dense grey		2	S.S.	74										
455	15.3			3	S.S.	54.6"										
450	20	CLAYEY SILT		4	S.S.	70.6"										
445	25	with sand.		5	S.S.	69.6"										
440	30	hard dry stone fragments		6	S.S.	110.3"										
435	35.1	END OF BOREHOLE		7	S.S.	65.1"										
	40															

W.L. El. 465.6'
Dec. 17, 1966
11:15 PM
W.L. El. 464.9'
Dec. 22, 1966

GR. 1 % ; SA. 62 %
SI. 32 % ; CL. 5 %

GR. 7 % ; SA. 30 %
SI. 24 % ; CL. 19 %

W.L. El. 465.6'
Dec. 17, 1966
11.15 PM
W.L. El. 464.9'
Dec. 22, 1966

GR. 1% ; SA. 62%
SI. 32% ; CL. 5%

GR. 7% ; SA. 30%
SI. 24% ; CL. 19%

VERTICAL SCALE 1 IN. TO 5 FT

DOMINION SOIL INVESTIGATION LIMITED

MADE D.A.M. CHD *Roches*

OUR REFERENCE NO. 6-11-11
Your Ref. No. W.J. 66-F-102

GEOTECHNICAL DATA SHEET FOR BOREHOLE . 29 .

CLIENT D. H. O.

PROJECT HWYS. 401, 27 & RICHVIEW EXPWY. INTERCHANGE

METHOD OF BORING AUGERING

ENCLOSURE NO.

LOCATION 870, 110 N; 979, 312 E.

DATE DEC 22, 1966

DATUM ELEVATION G.S.C.

W.P. 201-62-1

ELEVATION ft	DEPTH ft	STRATIFICATION DESCRIPTION	STRATIFICATION SYMBOL	SAMPLES			PENETRATION RESISTANCE blows per foot				CONSISTENCY water content %		REMARKS
				NUMBER	TYPE	-32- 60 Advancement of Sampler	2.0	4.0	6.0	8.0	10.0	PI	
467.8	0	GROUND SURFACE											
		TOPSOIL											
465	5	SILTY SAND (FILL) loose		1	S.S.	9							W.L. Et 465.3' Dec. 22, 1966
460	8.0	CLAYEY SILT with sand (glacial till) hard		2	S.S.	60/3"							
455	14.1			3	S.S.	80/1"							
450	15	END OF BOREHOLE											
	20												

VERTICAL SCALE 1 IN TO 5 FT

DOMINION SOIL INVESTIGATION LIMITED

MADE: D. A. M. CHD *Rolls*

GEOTECHNICAL DATA SHEET FOR BOREHOLE 30.

OUR REFERENCE NO. 6-11-11
Your Ref. No. W.J. 66-F-102

CLIENT: D.H.O.

PROJECT: HWYS. 401, 27 & RICHVIEW EXPWY INTERCHANGE

LOCATION: 870, 402 N., 979, 422 E.

DATUM ELEVATION: G.S.C.

METHOD OF BORING: AUGERING

DIAMETER OF BOREHOLE: 3 1/2"

DATE: DEC 16, 1966

W.P. 201-62-1

ENCLOSURE NO.

ELEVATION ft.	DEPTH ft.	STRATIFICATION DESCRIPTION	STRATIFICATION SYMBOL	SAMPLES			PENETRATION RESISTANCE Blows per foot					CONSISTENCY Water content %			REMARKS
				NUMBER	TYPE	N ₆₀ or Adjustment of Sample	20	40	60	80	100	PL	W	LI	
							SHEAR STRENGTH lbf/sq ft					20 40 60 80			
472.4	0	GROUND SURFACE													
		TOPSOIL & FILL													
470	5	CLAYEY SILT with sand stiff, brown		1	SS	8									
465	8.0	SILTY SAND with a trace of gravel. compact		2	SS	29									
460	15			3	SS	52									
455	20	CLAYEY SILT with sand hard, grey		4	SS	110/6"									
450	24.8	(transition to shale)		5	SS	100/4"									
	25	END OF BOREHOLE													
445	30														

W.L. El. 465.0'
DEC. 17, 1966
11:15 PM

GR. 10%; SA. 63%
SI. 21%; CL. 6%

VERTICAL SCALE 1 IN TO 5 FT

DOMINION SOIL INVESTIGATION LIMITED

MADE D.A.M. OND *Rees*

GEOTECHNICAL DATA SHEET FOR BOREHOLE . . 31 . .

OUR REFERENCE NO. G-11-11
Your Ref. No. WJ. 66-F-102

CLIENT D. H. O.

PROJECT HWYS. 401, 27 & RICHVIEW EXPWY INTERCHANGE

LOCATION 869, 816 N; 979, 417 E

DATUM ELEVATION G. S. C.

METHOD OF BORING AUGERING

DIAMETER OF BOREHOLE 3 1/2"

DATE DEC. 22, 1966

W. P. 201-62-1

ENCLOSURE NO.

ELEVATION ft	DEPTH ft	STRATIFICATION DESCRIPTION	STRATIFICATION SYMBOL	SAMPLES			PENETRATION RESISTANCE				CONSISTENCY				REMARKS	
				NUMBER	TYPE	N - Adj. or Actual of Sample	Blows per foot				water content %					
							20	40	60	80	100	PL	W	LI		
							SHEAR STRENGTH				lb/sq ft					
461.3	0	GROUND SURFACE														
460		TOPSOIL														W. L. AT GROUND SURFACE Dec. 22, 1966
455	15	SANDY SILT brown grey with a trace of clay.		1	S.S.	12										GR. 8 % ; SA. 32% SI. 46 % ; CL. 14%
450	10	CLAYEY SILT		2	S.S.	129/11"										
445	15	(glacial till) with shale hard fragments		3	S.S.	63/6"										
440	20	END OF BOREHOLE		4	S.S.	100/2"										
	25															

VERTICAL SCALE 1 IN TO 5 FT

DOMINION SOIL INVESTIGATION LIMITED

MADE D. A. M. CHO *Roller*

