



September 16, 2016

FOUNDATION INVESTIGATION REPORT

HIGHWAY 17 - VEUVE RIVER BRIDGE, SITE NO. 46-067
DISTRICT OF SUDBURY
TOWNSHIP OF HAGAR
MINISTRY OF TRANSPORTATION, ONTARIO
G.W.P. 5374-11-00

Submitted to:

Ministry of Transportation
447 McKeown Ave.
North Bay, Ontario
P1B 9S9



GEOCRES No.: 41I-347

Report Number: 1648295 - 05

Distribution:

1 Copy: Ministry of Transportation, Ontario, North Bay, ON (Northeastern Region)
1 Copy: Ministry of Transportation, Ontario, Foundations Section, Downsview, ON
1 PDF Copy: Golder Associates Ltd., Sudbury, ON

REPORT





Table of Contents

PART A – FOUNDATION INVESTIGATION REPORT

1.0 INTRODUCTION.....	1
2.0 SITE DESCRIPTION.....	1
4.0 SITE GEOLOGY AND SUBSURFACE CONDITIONS	2
4.1 Regional Geology	2
4.2 Subsurface Conditions.....	2
Groundwater Conditions.....	4
5.0 CLOSURE.....	4

DRAWING

Drawing 1 Borehole Locations and Soil Strata

PHOTOGRAPHS

Photographs 1 to 3

APPENDIX A RECORD OF BOREHOLES

Lists of Abbreviations and Symbols
Record of Boreholes V-1 and V-2

APPENDIX B LABORATORY TEST RESULTS

Figure B1 Sand (FILL)
Figure B2 Silt
Figure B3 Silt and Sand



FOUNDATION REPORT
HIGHWAY 17 - VEUVE RIVER BRIDGE, SITE NO. 46-067

PART A

FOUNDATION INVESTIGATION REPORT
VEUVE RIVER BRIDGE - SITE NO. 46-067
HIGHWAY 17, DISTRICT OF SUDBURY
TOWNSHIP OF HAGAR
MINISTRY OF TRANSPORTATION, ONTARIO
G.W.P. 5374-11-00



1.0 INTRODUCTION

Golder Associates Ltd. (Golder) has been retained by the Ministry of Transportation, Ontario (MTO) to provide foundation engineering services for temporary protection systems in support of the rehabilitation of the Veuve River Bridge (Site No. 46-067). The Veuve River Bridge is located on Highway 17 in the Township of Hagar, approximately 1.4 km west of Markstay Road. The key plan showing the general location of this section of Highway 17 and the location of the investigated area are shown on Drawing 1.

The Terms of Reference and the Scope of Work for the foundation investigation and design input for the temporary protection systems at the Veuve River Bridge are outlined in MTO's Assignment #2 (Agreement Number 5015-E-0014) dated May 16, 2016. The Scope of Work for the temporary protection systems was subsequently clarified by MTO by email dated May 26, 2016 and detailed in Golder's Revised Work Order Response letter dated May 31, 2016.

2.0 SITE DESCRIPTION

The orientation (i.e., north, south, east, west) stated in the text of the report is typically referenced to project north and therefore may differ from magnetic north shown on the drawing. For the purpose of this report, Highway 17 is oriented in a west-east direction with Veuve River flowing perpendicular to the highway in a south-north direction at the bridge crossing.

In general, the topography in this area is undulating with moderate to dense tree cover in the vicinity of the structure. The existing Veuve River Bridge is an approximately 32.5 m long by 13.6 m wide, three-span structure supported on piles (deep foundations). Based on the General Arrangement (GA) drawing (dated June 6, 2014) provided by MTO, the bridge deck is at Elevation 212.2 m and 211.5 m at the west and east abutments, respectively. The west and east approach embankments are about 5.2 m and 4.0 m high and the embankment side slopes are inclined at about 2 horizontal to 1 vertical (2H:1V).

3.0 INVESTIGATION PROCEDURES

The field work for this subsurface investigation was carried out on June 16, 2016, during which time two boreholes (Boreholes V-1 and V-2) were advanced at the bridge approaches. The boreholes were advanced using a truck-mounted CME-55 drill rig, supplied and operated by Landcore Drilling Ltd of Chelmsford Ontario.

The boreholes were advanced from the highway platform through the existing bridge approach slabs using NW casing and wash boring techniques. An NQ core barrel was used to advance the Borehole V-1 through a large (about 1.35 m diameter) boulder. Soil samples were obtained in the boreholes at 0.75 m and 1.5 m intervals of depth using 50 mm outer diameter split-spoon samplers driven by an automatic hammer, in accordance with the Standard Penetration Test (SPT) procedures (ASTM D1586). The groundwater levels in the open boreholes were observed during the drilling operations as described on the Record of Borehole sheets in Appendix A. The boreholes were backfilled upon completion in accordance with Ontario Regulation 903 Wells (as amended).

The field work was supervised on a full-time basis by a members of Golder's technical staff who: located the boreholes in the field; arranged for the clearance of underground services; supervised the drilling and sampling operations; logged the boreholes; and examined and cared for the soil samples. The soil samples were identified



FOUNDATION REPORT HIGHWAY 17 - VEUVE RIVER BRIDGE, SITE NO. 46-067

in the field, placed in labelled containers and transported to Golder's geotechnical laboratory in Sudbury for further examination and laboratory testing. Index and classification testing consisting of water content determinations, grain size distributions, an Atterberg limits test and an organic content were carried out on selected soil samples.

The as-drilled borehole locations and ground surface elevations were measured and surveyed by member of our technical staff, referenced to the highway centerline at the existing abutments and converted into northing/easting coordinates on the plan drawing. The ground surface elevation of the highway centerline was obtained from the general arrangement drawing [(46-67) Hwy 17 – Veuve River Bridge Rehabilitation.dwg] provided by MTO. The MTM NAD83 (Zone 12) northing and easting coordinates and geographical coordinates, ground surface elevations referenced to Geodetic datum and borehole depths at each borehole locations are presented on the Record of Borehole sheets in Appendix A and summarized below.

Borehole Number	MTM NAD83 Northing (Latitude)	MTM NAD83 Easting (Longitude)	Ground Surface Elevation	Borehole Depth
V-1	5150302.4 m (46.4915219°)	338901.4 m (-80.55577936)	212.2 m	7.3 m
V-2	5150272.8 m (46.49125449°)	338923.3 m (-80.55549626°)	211.5 m	6.7 m

4.0 SITE GEOLOGY AND SUBSURFACE CONDITIONS

4.1 Regional Geology

Based on Northern Ontario Engineering Geology Terrain (NOEGTS) mapping by the Ministry of Natural Resources (MNR) ¹, the subsoils in the vicinity of the Veuve River Bridge site generally consist of undulating/rolling bedrock knobs closely bordered to the east by glaciolacustrine deposits comprised primarily of silt.

Based on geological mapping by the Ministry of Northern Development and Mines (MNDM)² the site is underlain by migmatitic rocks and gneisses of undetermined protolith comprised of commonly layered biotite gneisses and migmatites; and locally includes quartzofeldspathic gneisses, orthogneisses and paragneisses.

4.2 Subsurface Conditions

The detailed subsurface soil and groundwater conditions encountered in the boreholes and the results of in situ and laboratory testing are given on the Record of Borehole sheets contained in Appendix A. The results of geotechnical laboratory testing are contained in Appendix B. The results of the in situ field tests (i.e., SPT 'N' values as presented on the Record of Borehole sheets and in Section 4 are uncorrected. The stratigraphic boundaries shown on the Record of Borehole sheets and on the interpreted stratigraphic profile on Drawing 1 are inferred from non-continuous sampling and, therefore, represent transitions between soil types rather than exact planes of geological change. The subsoil conditions will vary between and beyond the borehole locations.

¹ Ministry of Natural Resources. Northern Ontario Engineering Geology Terrain Study. Ontario Geological Society Electronic Mapping. Map 41ISE.

² Ministry of Northern Development of Mines. Bedrock Geology of Ontario – East-Central Sheet, Ontario Geological Survey – Map 2543.



FOUNDATION REPORT HIGHWAY 17 - VEUVE RIVER BRIDGE, SITE NO. 46-067

Subsoil Conditions

In summary, the subsoil conditions encountered at the site consist of an asphalt, concrete and granular fill roadway structure underlain by deposits of organic silt, silt and silt and sand. A more detailed description of the subsurface soils and groundwater conditions encountered in the boreholes is provided below.

Deposit/Layer Description	Boreholes		Thickness (m)		Elevation (m)		N Values (blows)	Laboratory Testing
	West Abut.	East Abut.	West Abut.	East Abut.	West Abut.	East Abut.	Relative Density	
Asphalt	V-1	V-2	0.090	0.115	212.2	211.5	n/a	n/a
Concrete	V-1	V-2	0.260	0.150	212.1	211.4	n/a	n/a
(FILL) Sand , trace to some silt, some gravel; brown, moist	V-1	V-2	2.7	2.7	211.9	211.2	N = 7 to 34	w = 10% 1 – M (Fig. B1)
							Loose to Dense	
Silt * , some clay, trace to some sand; brown to grey, wet	V-1	V-2	> 4.3 (borehole terminated in this deposit)	3.4	209.2	208.5	N = 1 - 15	w = 22% 2 – MH (Fig. B2) 1 – AL (NP)
							Very Loose to Compact	
Organic Silt	n/a	V-2	n/a	0.6	n/a	206.6	N = 1 Very Soft	w = 40% 1 – MH (Fig. B2) 1 – AL (NP) Org = 5.3%
Silt and Sand , some clay, trace gravel; grey, wet	n/a	V-2	n/a	>0.3 m (borehole terminated in this deposit)	n/a	205.1	N = 2	w = 40% 1 – MH (Fig. B3)
							Very Loose	

Where:

N = SPT 'N'-value; number of blows for 0.3 m of penetration

w = Natural moisture content (%)

M = Sieve analysis

MH = Combined sieve analysis and hydrometer

AL = Atterberg limits test

NP = Non-plastic Atterberg limits test result

Org = Organic content (%)

* A 1.4 m diameter boulder was encountered within the Silt deposit in Borehole V-1 at approximately 5.5 m depth as noted in the Record of Borehole sheet.

** A 0.6 m pocket of organic silt was encountered within the silt deposit in Borehole V-2 at approximately 4.9 m depth as noted in the Record of Borehole sheet.



Groundwater Conditions

Unstabilized groundwater levels measured in the open boreholes upon completion of drilling are summarized below. The river water level was surveyed by Golder at Elevation 205.6 m on June 16, 2016. Groundwater and river water levels in the area are subject to seasonal fluctuations and variations due to precipitation events.

Borehole No.	Depth to Groundwater Level * (m)	Groundwater Elevation (m)
V-1	3.7 **	208.5
V-2	3.4	208.1

* The boreholes were advanced using NW casing and wash boring techniques and as such, the measured groundwater levels may not be representative of the in-situ groundwater conditions.

** Borehole V-1 was noted to be dry to the caved depth of 3.7 m below the existing ground surface after removing the casing from the borehole upon completion of drilling. The groundwater level is inferred to be at 3.7 m below ground surface.

5.0 CLOSURE


The field drilling program was carried out under the supervision of Mr. Adam Core, P.Eng., under the overall direction of Mr. David Muldowney, P.Eng. This Foundation Investigation Report was prepared by Mr. David Muldowney, P.Eng., and Mr. Jorge M. A. Costa, P.Eng., a Senior Consultant with and Designated MTO Foundations Contact for Golder, conducted an independent quality control review audit of this report.



FOUNDATION REPORT
HIGHWAY 17 - VEUVE RIVER BRIDGE, SITE NO. 46-067

Report Signature Page

GOLDER ASSOCIATES LTD.

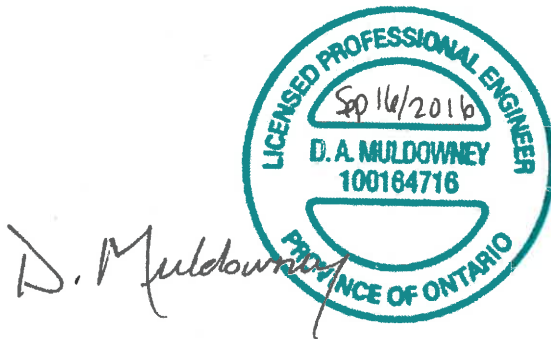

David Muldowney, P.Eng.
Geotechnical Engineer





Jorge M. A. Costa, P.Eng.
Designated MTO Foundations Contact, Senior Consultant

DAM/JMAC/kp


Golder, Golder Associates and the GA globe design are trademarks of Golder Associates Corporation.

\\golder.gds\gal\whitby\active\2016\3 proj\1648295 mto_5015-e-0014-retainer ne\assignment #2\reporting\05 - veuve river bridge\final\1648295 rpt-03 16sep16 veuve river bridge fir.docx

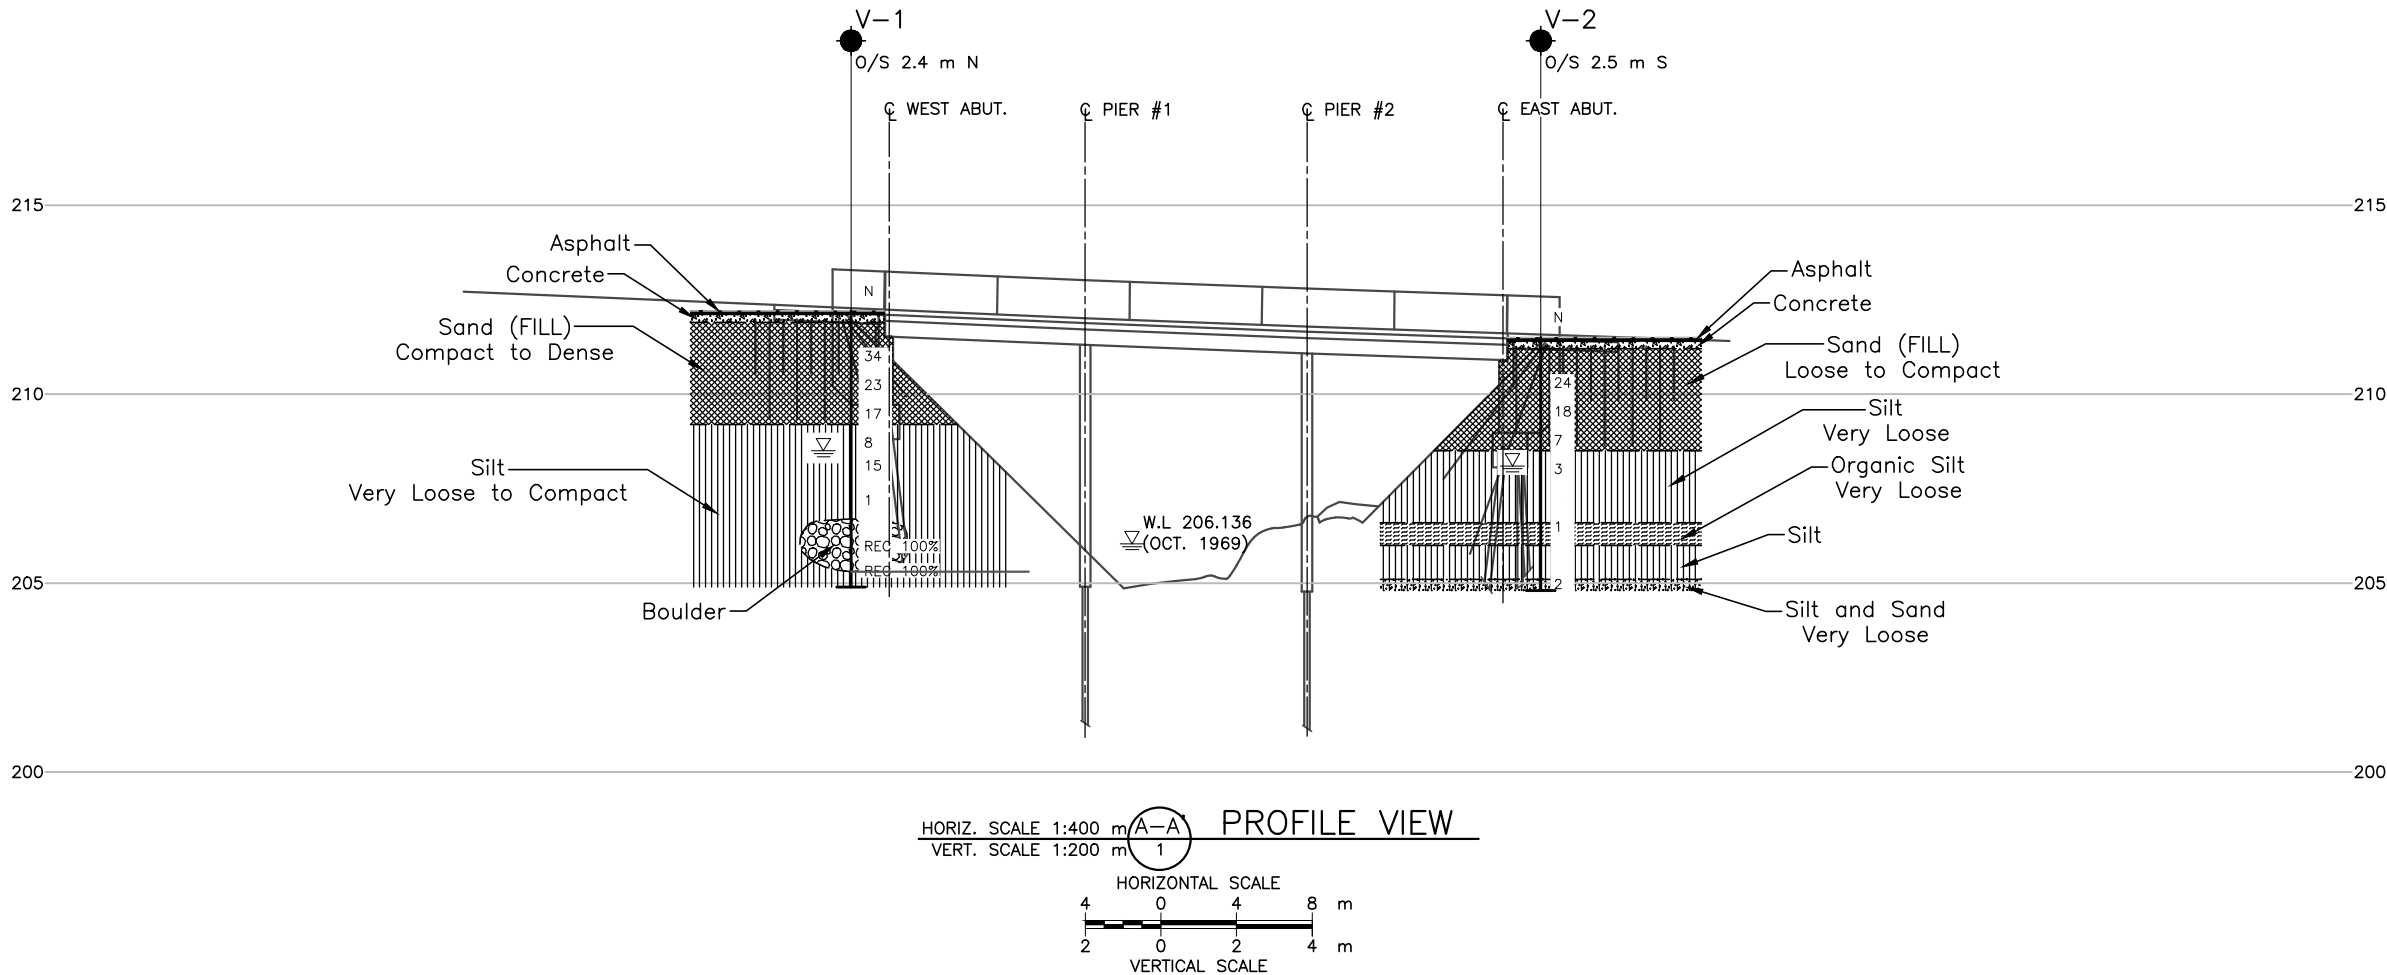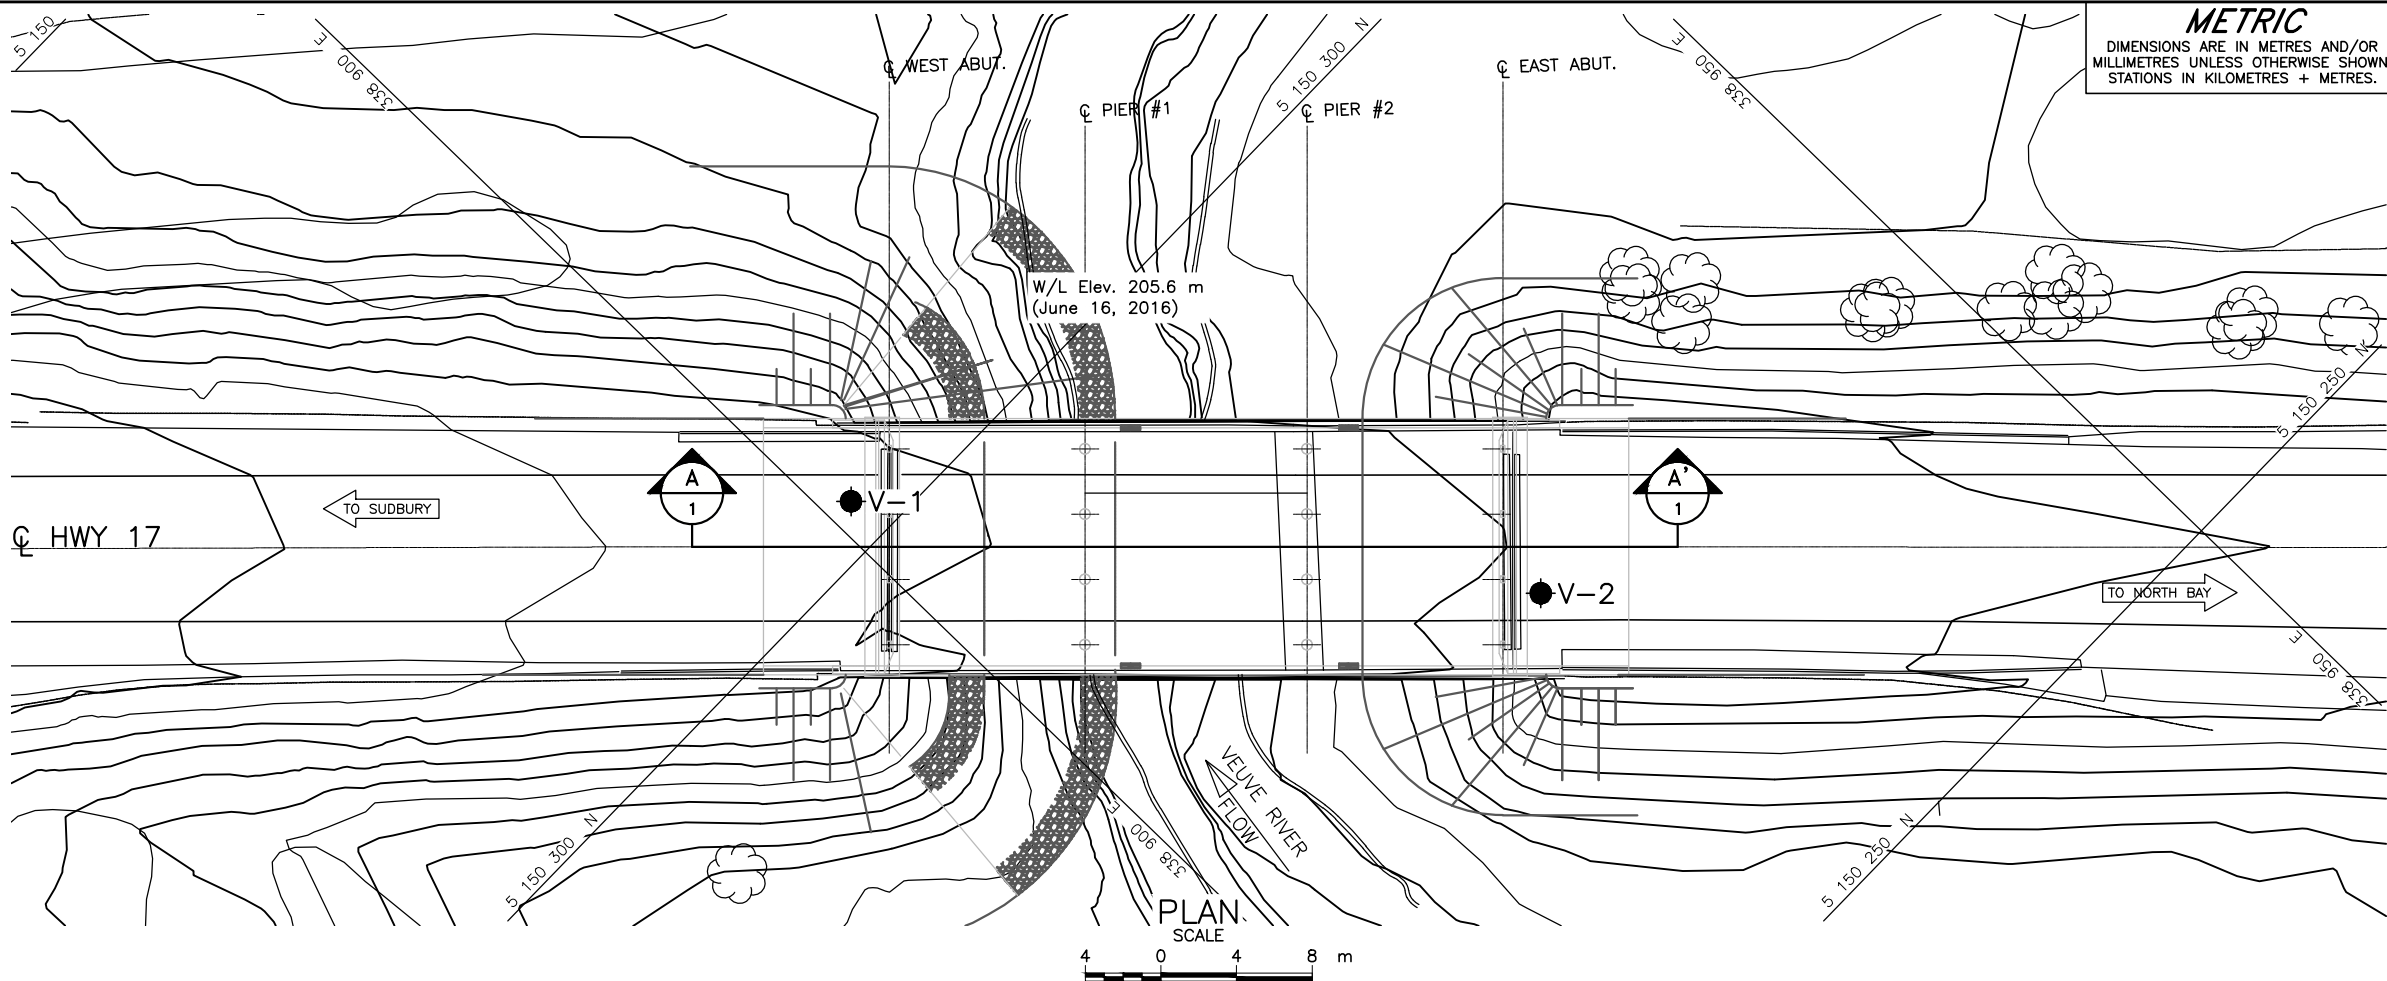

CONT No. GWP No. 5347-11-00

VEUVE RIVER BRIDGE
HIGHWAY 17
BOREHOLE LOCATIONS AND SOIL STRATA

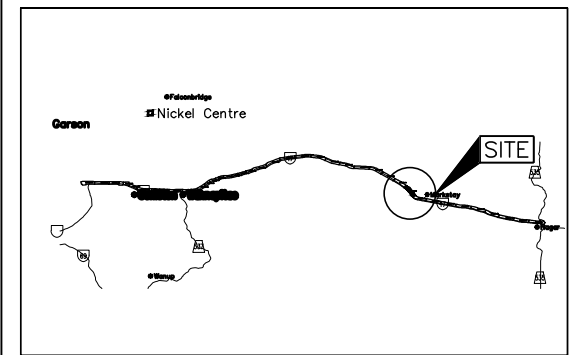

KEY PLAN
N.T.S.

LEGEND

- Borehole - Current Investigation
- N Standard Penetration Test Value
- 16 Blows/0.3m unless otherwise stated (Std. Pen. Test, 475 j/blow)
- W/L upon completion of drilling
- REC Recovery %

BOREHOLE CO-ORDINATES			
No.	ELEVATION	NORTHING	EASTING
V-1	212.2	5150302.4	338901.4
V-2	211.5	5150272.8	338923.3

NOTES

This drawing is for subsurface information only. The proposed structure details/works are shown for illustration purposes only and may not be consistent with the final design configuration as shown elsewhere in the Contracts Documents.

The boundaries between soil strata have been established only at borehole locations. Between boreholes the boundaries are assumed from geological evidence.

The complete Foundation Investigation and Design Report for this project and other related documents may be examined at the Materials Engineering and Research Office, Downsview. Information contained in this report and related documents is specifically excluded in accordance with Section GC 2.01 of OPS General Conditions.

REFERENCE

Base plans provided in digital format by MTQ, drawing file nos. ('~ MASTER'~(46-066) HWY 17-CPR OVERHEAD REHABILITATION.dwg, received July 12, 2016; Drawing file nos. 141331.dwg and 141332.dwg, recieved July 27, 2016.



NO.	DATE	BY	REVISION
1	09/07/2016	JJL	1
Geocres No. 411-347			
HWY. 17	PROJECT NO. 1648295	DIST. SUDBURY	
SUBM'D. AC	CHKD. .	DATE: 09/07/2016	SITE: 46-067
DRAWN: JJL	CHKD. DAM	APPD. JMAC	DWG. 1



PHOTOGRAPHS

**Photograph 1: Veuve River Bridge
Looking East at West Abutment (August 2016)**



**Photograph 2: Veuve River Bridge
Looking West at East Abutment (August 2016)**





PHOTOGRAPHS

**Photograph 3: Veuve River Bridge
Looking Northwest at South Side of Bridge (August 2016)**





APPENDIX A

Record of Boreholes



LIST OF SYMBOLS

Unless otherwise stated, the symbols employed in the report are as follows:

I. GENERAL

π	3.1416
$\ln x$,	natural logarithm of x
\log_{10}	x or log x, logarithm of x to base 10
g	acceleration due to gravity
t	time
FoS	factor of safety

II. STRESS AND STRAIN

γ	shear strain
Δ	change in, e.g. in stress: $\Delta \sigma$
ε	linear strain
ε_v	volumetric strain
η	coefficient of viscosity
ν	Poisson's ratio
σ	total stress
σ'	effective stress ($\sigma' = \sigma - u$)
σ'_{vo}	initial effective overburden stress
$\sigma_1, \sigma_2, \sigma_3$	principal stress (major, intermediate, minor)
σ_{oct}	mean stress or octahedral stress $= (\sigma_1 + \sigma_2 + \sigma_3)/3$
τ	shear stress
u	porewater pressure
E	modulus of deformation
G	shear modulus of deformation
K	bulk modulus of compressibility

III. SOIL PROPERTIES

(a)	Index Properties
$\rho(\gamma)$	bulk density (bulk unit weight)*
$\rho_d(\gamma_d)$	dry density (dry unit weight)
$\rho_w(\gamma_w)$	density (unit weight) of water
$\rho_s(\gamma_s)$	density (unit weight) of solid particles
γ'	unit weight of submerged soil ($\gamma' = \gamma - \gamma_w$)
D_R	relative density (specific gravity) of solid particles ($D_R = \rho_s / \rho_w$) (formerly G_s)
e	void ratio
n	porosity
S	degree of saturation

(a) Index Properties (continued)

w	water content
w_l or LL	liquid limit
w_p or PL	plastic limit
I_p or PI	plasticity index $= (w_l - w_p)$
w_s	shrinkage limit
I_L	liquidity index $= (w - w_p) / I_p$
I_C	consistency index $= (w_l - w) / I_p$
e_{max}	void ratio in loosest state
e_{min}	void ratio in densest state
I_D	density index $= (e_{max} - e) / (e_{max} - e_{min})$ (formerly relative density)

(b) Hydraulic Properties

h	hydraulic head or potential
q	rate of flow
v	velocity of flow
i	hydraulic gradient
k	hydraulic conductivity (coefficient of permeability)
j	seepage force per unit volume

(c) Consolidation (one-dimensional)

C_c	compression index (normally consolidated range)
C_r	recompression index (over-consolidated range)
C_s	swelling index
C_α	secondary compression index
m_v	coefficient of volume change
C_v	coefficient of consolidation (vertical direction)
C_h	coefficient of consolidation (horizontal direction)
T_v	time factor (vertical direction)
U	degree of consolidation
σ'_p	pre-consolidation stress
OCR	over-consolidation ratio $= \sigma'_p / \sigma'_{vo}$

(d) Shear Strength

τ_p, τ_r	peak and residual shear strength
ϕ'	effective angle of internal friction
δ	angle of interface friction
μ	coefficient of friction $= \tan \delta$
c'	effective cohesion
c_u, s_u	undrained shear strength ($\phi = 0$ analysis)
p	mean total stress $(\sigma_1 + \sigma_3)/2$
p'	mean effective stress $(\sigma'_1 + \sigma'_3)/2$
q	$(\sigma_1 - \sigma_3)/2$ or $(\sigma'_1 - \sigma'_3)/2$
q_u	compressive strength $(\sigma_1 - \sigma_3)$
S_t	sensitivity

* Density symbol is ρ . Unit weight symbol is γ where $\gamma = \rho g$ (i.e. mass density multiplied by acceleration due to gravity)

Notes: 1
2

$$\tau = c' + \sigma' \tan \phi'$$

$$\text{shear strength} = (\text{compressive strength})/2$$



LIST OF ABBREVIATIONS

The abbreviations commonly employed on Records of Boreholes, on figures and in the text of the report are as follows:

I. SAMPLE TYPE

AS	Auger sample
BS	Block sample
CS	Chunk sample
DS	Denison type sample
FS	Foil sample
RC	Rock core
SC	Soil core
SS	Split-spoon
ST	Slotted tube
TO	Thin-walled, open
TP	Thin-walled, piston
WS	Wash sample

II. PENETRATION RESISTANCE

Standard Penetration Resistance (SPT), N:

The number of blows by a 63.5 kg. (140 lb.) hammer dropped 760 mm (30 in.) required to drive a 50 mm (2 in.) drive open sampler for a distance of 300 mm (12 in.)

Dynamic Cone Penetration Resistance; N_d :

The number of blows by a 63.5 kg (140 lb.) hammer dropped 760 mm (30 in.) to drive uncased a 50 mm (2 in.) diameter, 60° cone attached to "A" size drill rods for a distance of 300 mm (12 in.).

PH: Sampler advanced by hydraulic pressure

PM: Sampler advanced by manual pressure

WH: Sampler advanced by static weight of hammer

WR: Sampler advanced by weight of sampler and rod

Piezo-Cone Penetration Test (CPT)

A electronic cone penetrometer with a 60° conical tip and a project end area of 10 cm² pushed through ground at a penetration rate of 2 cm/s. Measurements of tip resistance (Q_t), porewater pressure (PWP) and friction along a sleeve are recorded electronically at 25 mm penetration intervals.

III. SOIL DESCRIPTION

(a) Non-Cohesive (Cohesionless) Soils

Density Index	N
Relative Density	Blows/300 mm or Blows/ft
Very loose	0 to 4
Loose	4 to 10
Compact	10 to 30
Dense	30 to 50
Very dense	over 50

(b) Cohesive Soils Consistency

	c_u, s_u	
	kPa	psf
Very soft	0 to 12	0 to 250
Soft	12 to 25	250 to 500
Firm	25 to 50	500 to 1,000
Stiff	50 to 100	1,000 to 2,000
Very stiff	100 to 200	2,000 to 4,000
Hard	over 200	over 4,000

IV. SOIL TESTS

w	water content
w_p	plastic limit
w_l	liquid limit
C	consolidation (oedometer) test
CHEM	chemical analysis (refer to text)
CID	consolidated isotropically drained triaxial test ¹
CIU	consolidated isotropically undrained triaxial test with porewater pressure measurement ¹
D_R	relative density (specific gravity, G_s)
DS	direct shear test
M	sieve analysis for particle size
MH	combined sieve and hydrometer (H) analysis
MPC	Modified Proctor compaction test
SPC	Standard Proctor compaction test
OC	organic content test
SO_4	concentration of water-soluble sulphates
UC	unconfined compression test
UU	unconsolidated undrained triaxial test
V	field vane (LV-laboratory vane test)
γ	unit weight

Note: 1 Tests which are anisotropically consolidated prior to shear are shown as CAD, CAU.

V. MINOR SOIL CONSTITUENTS

Per cent by Weight	Modifier	Example
0 to 5	Trace	Trace sand
5 to 12	Trace to Some (or Little)	Trace to some sand
12 to 20	Some	Some sand
20 to 30	(ey) or (y)	Sandy
over 30	And (non-cohesive (cohesionless)) or With (cohesive)	Sand and Gravel Silty Clay with sand / Clayey Silt with sand

PROJECT 1648295		RECORD OF BOREHOLE No V-1				1 OF 1 METRIC											
G.W.P. 5374-11-00		LOCATION N 5150302.4; E 338901.4 MTM ZONE 12 (LAT. 46.4915219; LONG. -80.55577936)				ORIGINATED BY AC											
DIST SUDBURY HWY 17		BOREHOLE TYPE NW Casing and Wash Boring with NQ Coring				COMPILED BY TB											
DATUM GEODETIC		DATE June 16, 2016				CHECKED BY DAM											
SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC NATURAL LIQUID LIMIT MOISTURE LIMIT CONTENT			UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa					WATER CONTENT (%)				
								20 40 60 80 100	20 40 60 80 100	20 40 60	20 40 60	20 40 60					
212.2	GROUND SURFACE																
0.0	ASPHALT (90 mm)																
	CONCRETE (260 mm)																
0.3	Sand, trace to some silt, some gravel (FILL) Compact to dense Brown Moist		1	SS	34												
			2	SS	23												
			3	SS	17												
209.2	SILT, some clay, trace to some sand Very loose to compact Brown to grey Wet		4	SS	8												
3.0			5	SS	15												
			6	SS	1												
206.7	Approximately 1.4 m diameter boulder encountered from 5.5 m to 6.9 m depth.		R1	RC	REC 100%												
5.5			R2	RC	REC 100%												
205.3																	
6.9																	
204.9	END OF BOREHOLE																
7.3	Notes: 1. Water level at ground surface upon completion of coring. 2. Borehole dry to caved depth of 3.7 m below ground surface (Elev. 208.5 m) after removing casing upon completion of drilling. Groundwater level inferred at Elevation 208.5 m.																


PROJECT 1648295				RECORD OF BOREHOLE No V-2				1 OF 1 METRIC									
G.W.P. 5374-11-00				LOCATION N 5150272.8; E 338923.3 MTM ZONE 12 (LAT. 46.49125449; LONG. -80.55549626)				ORIGINATED BY AC									
DIST SUDBURY HWY 17				BOREHOLE TYPE NW Casing and Wash Boring				COMPILED BY TB									
DATUM GEODETIC				DATE June 16, 2016				CHECKED BY DAM									
SOIL PROFILE			SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ kN/m ³	REMARKS & GRAIN SIZE DISTRIBUTION (%) GR SA SI CL
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE	"N" VALUES			SHEAR STRENGTH kPa									
211.5	GROUND SURFACE							20	40	60	80	100					
0.0	ASPHALT (115 mm)																
	CONCRETE (150 mm)																
0.3	Sand, trace to some silt, some gravel (FILL) Loose to compact Brown Moist		1	SS	24		211										
			2	SS	18		210										
			3	SS	7		209										
208.5																	
3.0	SILT, some clay, trace to some sand, trace organics Very loose Grey Wet		4	SS	3		208										
							207										
206.6			5A	SS	1												
4.9	ORGANIC SILT, some clay, trace to some sand Very loose Dark brown Wet		5B				206										
206.0																	
5.5	SILT, some clay, trace to some sand Grey Wet																
205.1			6A	SS	2												
204.8	SILT and SAND, trace to some clay, trace gravel Very loose Grey Wet		6B				205										
6.7	END OF BOREHOLE																
Note: 1. Water level at a depth of 3.4 m below ground surface (Elev. 208.1 m) upon completion of drilling.																	

SUD-MTO 001 MTM ZN 12 INC LAT/LONG 1648295_RET2.GPJ GAL-MISS.GDT 07/09/16 DATA INPUT:



APPENDIX B

Laboratory Test Results

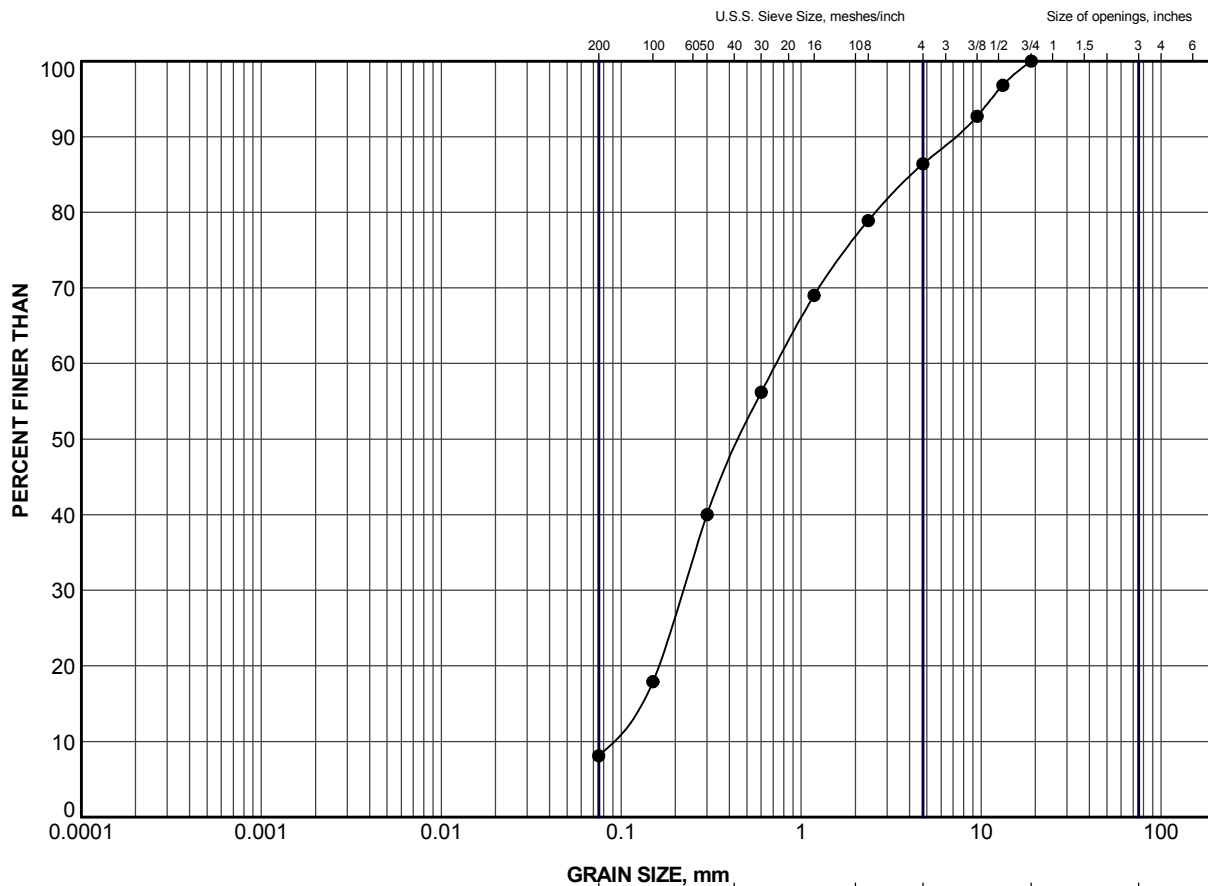


CLAY AND SILT	GRAVEL SIZE, mm					Cobble Size
	fine	medium	coarse	fine	coarse	
	SAND SIZE			GRAVEL SIZE		

LEGEND

SYMBOL	BOREHOLE	SAMPLE	ELEV (m)
●	V-1	2	210.4

PROJECT					
HIGHWAY 17 VEUVE RIVER BRIDGE					
TITLE					
GRAIN SIZE DISTRIBUTION SAND (FILL)					
PROJECT No.		1648295		FILE No. 1648295_RET2.GPJ	
DRAWN	JJL	Aug 2016	SCALE	N/A	REV.
CHECK	DAM	Aug 2016	FIGURE B1		
APPR	JMAC	Aug 2016			

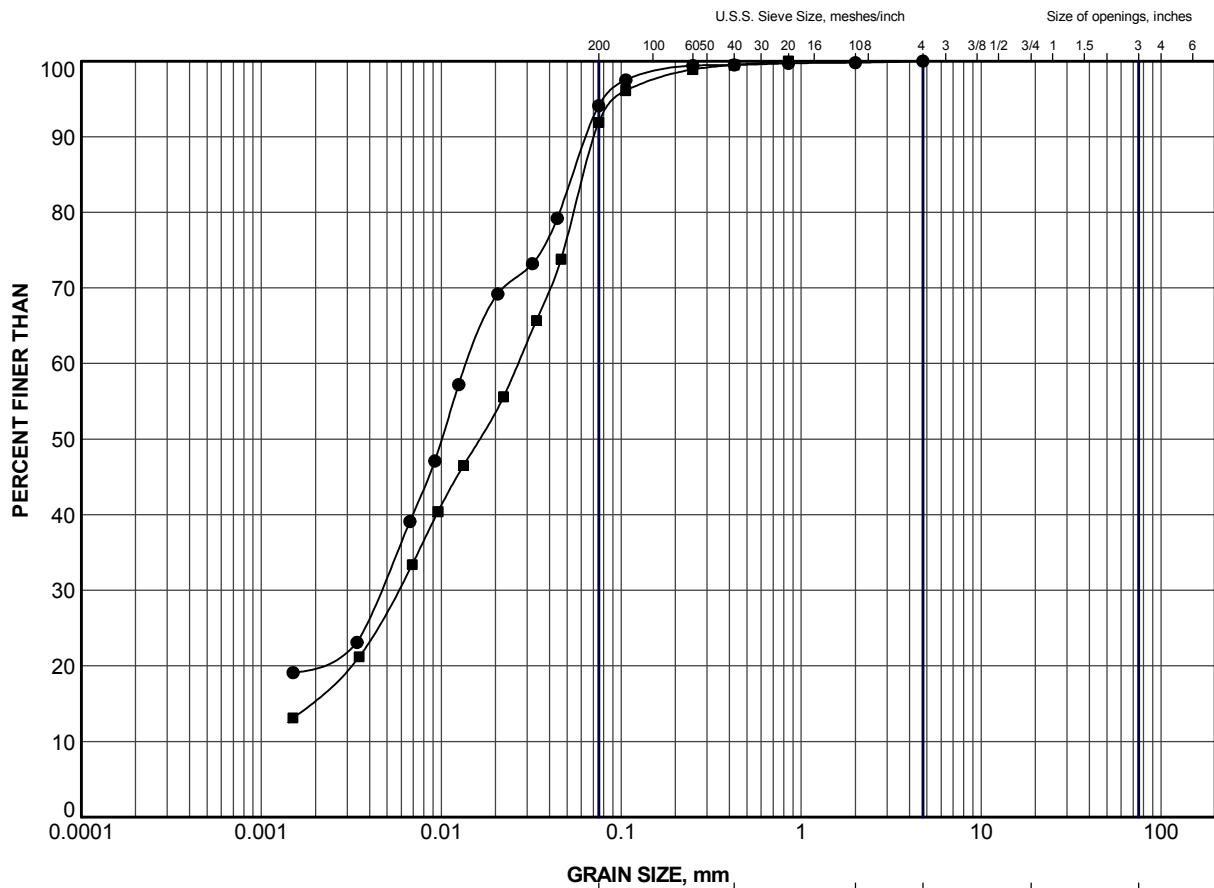


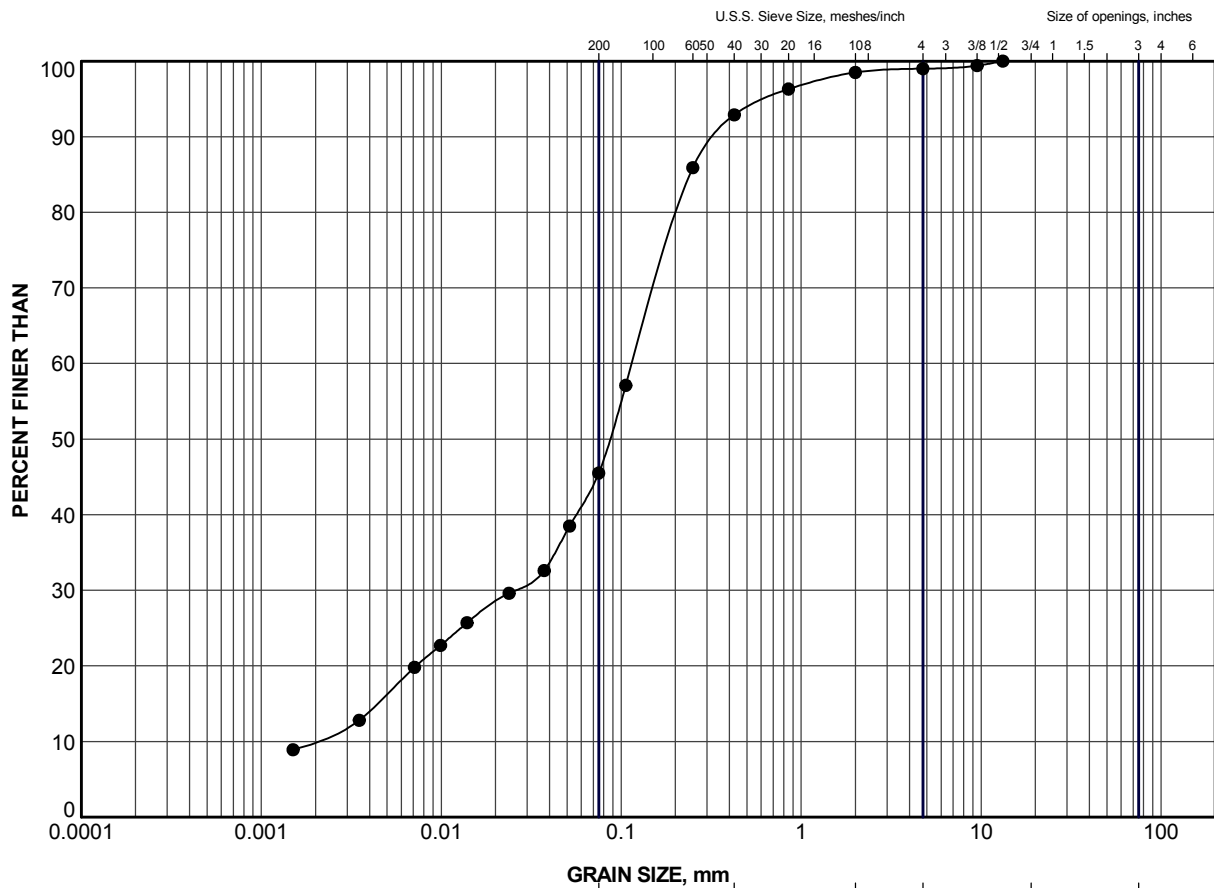


GRAIN SIZE, mm						
CLAY AND SILT	fine	medium	coarse	fine	coarse	Cobble Size
	SAND SIZE			GRAVEL SIZE		

LEGEND

SYMBOL	BOREHOLE	SAMPLE	ELEV (m)
●	V-1	4	208.8
■	V-2	5B	206.5


PROJECT						HIGHWAY 17 VEUVE RIVER BRIDGE					
TITLE						GRAIN SIZE DISTRIBUTION SILT					
PROJECT No.				1648295		FILE No.				1648295_RET2.GPJ	
DRAWN		JJL		Aug 2016		SCALE		N/A		REV.	
CHECK		DAM		Aug 2016							
APPR		JMAC		Aug 2016							
 Golder Associates SUDBURY, ONTARIO						FIGURE B2					



GRAIN SIZE, mm						
CLAY AND SILT	fine	medium	coarse	fine	coarse	Cobble Size
	SAND SIZE			GRAVEL SIZE		

LEGEND

SYMBOL	BOREHOLE	SAMPLE	ELEV (m)
●	V-2	6B	204.9

PROJECT						HIGHWAY 17 VEUVE RIVER BRIDGE					
TITLE						GRAIN SIZE DISTRIBUTION SILT and SAND					
PROJECT No.				1648295		FILE No.				1648295_RET2.GPJ	
DRAWN		J.J.L.		Aug 2016		SCALE		N/A		REV.	
CHECK		DAM		Aug 2016							
APPR		JMAC		Aug 2016							
 Golder Associates SUDBURY, ONTARIO						FIGURE B3					

As a global, employee-owned organisation with over 50 years of experience, Golder Associates is driven by our purpose to engineer earth's development while preserving earth's integrity. We deliver solutions that help our clients achieve their sustainable development goals by providing a wide range of independent consulting, design and construction services in our specialist areas of earth, environment and energy.

For more information, visit golder.com

Africa	+ 27 11 254 4800
Asia	+ 86 21 6258 5522
Australasia	+ 61 3 8862 3500
Europe	+ 44 1628 851851
North America	+ 1 800 275 3281
South America	+ 56 2 2616 2000

solutions@golder.com
www.golder.com

Golder Associates Ltd.
33 Mackenzie Street, Suite 100
Sudbury, Ontario, P3C 4Y1
Canada
T: +1 (705) 524 6861

