

Final Foundation Investigation Report

Highway 24 Resurfacing and
Replacement of Culvert at
Station 16+453 (Site No. 17)
Township of South Dumfries, ON

G.W.P. 3065-11-00

Geocres No. 40P08-239



Prepared for:
Ministry of Transportation Ontario

Prepared by:
Stantec Consulting Ltd.
400 – 1331 Clyde Avenue
Ottawa, ON K2C 3G4

Project No. 165000903

January 2017

Table of Contents

1.0	INTRODUCTION	1
2.0	SITE DESCRIPTION AND GEOLOGY	1
3.0	INVESTIGATION PROCEDURES	2
3.1	REVIEW OF PREVIOUS INVESTIGATION.....	2
3.2	FIELD INVESTIGATION – CULVERT SITE.....	2
3.3	LOCATION AND ELEVATION SURVEY	3
3.4	LABORATORY TESTING	3
4.0	SUBSURFACE CONDITIONS	4
4.1	SUBSURFACE PROFILE	4
4.1.1	PAVEMENT	4
4.1.2	Fill.....	4
4.1.3	Clayey SILT.....	5
4.1.4	PEAT	5
4.1.5	Sandy SILT to Silty SAND	5
4.1.6	Groundwater.....	6
5.0	CHEMICAL ANALYSIS.....	7
6.0	MISCELLANEOUS	7
7.0	CLOSURE.....	8

LIST OF TABLES

Table 1.1: Coordinates of Culverts on Highway 24, Township of South Dumfries, ON (MTM Zone 10).....	1
Table 3.1: Borehole Summary	3
Table 3.2: Laboratory Testing for Culvert Site.....	3
Table 4.1: Inferred and Measured Groundwater levels	6
Table 5.1: Results of Chemical Analysis	7

LIST OF APPENDICES

APPENDIX A	Drawing No. 1 – Borehole Location Plan and Soil Strata Plot Site Photos
APPENDIX B	Symbols and Terms Used on Borehole Records Borehole Records
APPENDIX C	Laboratory Test Results

FINAL FOUNDATION INVESTIGATION REPORT

January 2017

FOUNDATION INVESTIGATION REPORT

For

G.W.P 3065-11-00

Highway 24 – Replacement of Culvert at Station 16+453

Site No. 17

Township of South Dumfries

1.0 INTRODUCTION

Stantec Consulting Ltd. (Stantec) was retained by the Ministry of Transportation Ontario (MTO) to undertake the detailed design for resurfacing of Highway 24, Township of South Dumfries, Ontario. The geotechnical investigations are required to support the design of the replacement of six non-structural culverts located on Highway 24 between Highway 5 and Glen Morris Road East. The culvert numbers along with their approximate easting and northing coordinates given in Table 1.1 below.

Table 1.1: Coordinates of Culverts on Highway 24, Township of South Dumfries, ON (MTM Zone 10)

Culvert Station (Site No.)	Easting	Northing	Culvert Station (Site No.)	Easting	Northing
15+138 (10)	240328.968	4790308.382	16+453 (17)	239955.403	4791538.822
15+738 (12)	240146.455	4790857.376	17+001 (23)	239823.628	4792085.529
16+167 (16)	240028.947	4791272.063	17+845 (29)	239596.513	4792892.253

This Foundation Investigation Report has been prepared specifically and solely for the replacement of Culvert No. 17 which is located at Station 16+453.

Project Number: G.W.P. 3065-11-00

Project Location: Highway 24, 572 m south of McLean School Road

The work was carried out under MTO Agreement Number 3013-E-0019 with Stantec Consulting Ltd., the Detailed Design Consultant for this project.

2.0 SITE DESCRIPTION AND GEOLOGY

Site Location

The site location is shown on the Key Plan inset to Drawing No. 1, provided in Appendix A. The existing Culvert crosses beneath Highway 24 near Station 16+453, approximately 572 m south of the intersection of Highway 24 and McLean School Road.

FINAL FOUNDATION INVESTIGATION REPORT

January 2017

General Site Description

It is noted that Highway 24 runs approximately north to south at the project location with chainage increasing from south to north. In the vicinity of the culvert, Highway 24 has a two lane rural cross-section with approximately 1 m wide paved shoulder with wood guide rails on both sides.

The culvert allows the water of the watercourses on the east and west sides of the highway to follow under the road. The road embankment has side slopes of approximately 1.5H:1V to 2.5H:1V. The paved surface of the highway is approximately 3.2 to 4.1 m higher than the ditches surface on both sides of the road. The area beyond the water course is covered with brush and trees. Site photos are shown in Appendix A.

Existing Culvert

The terms of reference indicate the existing culvert type is a Corrugated Steel Pipe (CSP). The culvert has a diameter of 950 mm and a length of 36.71 m. The culvert is covered with approximately 3 m of fill. The approximate alignment of the existing culvert is shown on Drawing No. 1 in Appendix A.

3.0 INVESTIGATION PROCEDURES

3.1 REVIEW OF PREVIOUS INVESTIGATION

A review of the Geocres report for the Alder Creek Culvert Replacement located 5.6 km north of the study area suggests that the surficial geology of the site consists of silty sand with gravel to silty gravel with sand till deposits. Depth of bedrock is anticipated greater than 10 m.

3.2 FIELD INVESTIGATION – CULVERT SITE

A field investigation consisting of three boreholes was carried out at the culvert site. The boreholes were designated BH15-10, BH15-11, and BH15-12 and their locations are shown on the Borehole Location Plan, Drawing No.1 in Appendix A.

Prior to carrying out the investigation, Stantec contacted the public utility authorities to clear the borehole locations of public utilities.

The field drilling program was carried out on June 9 and 24, 2015. One borehole (BH15-11) was advanced with hollow-stem augers using a truck mounted drill rig equipped for soil and bedrock sampling owned and operated by Downing Drilling of Hawkesbury, ON. Two boreholes (BH15-10 and BH15-12) were advanced using portable drilling equipment owned and operated by Sonic Soil Sampling of Concord, ON.

The subsurface stratigraphy encountered in each borehole was recorded in the field by experienced Stantec personnel. In BH15-11, split spoon samples were collected at regularly

FINAL FOUNDATION INVESTIGATION REPORT

January 2017

spaced intervals (typically every 760 mm) during the course of Standard Penetration Testing (ASTM D1586). In BH15-10 and BH15-12, Dynamic Cone Penetration Testing (DCPT) was performed using a 70 lb weight; a 50% correction factor has been applied to the DCPT results presented on the borehole records. Samples were collected using a split spoon sample advanced using a Pionjar jackhammer within approximately 1 m of the DCPT location. All samples recovered were returned to Stantec's Ottawa laboratory for detailed classification and testing.

Groundwater readings were carried out in open holes immediately upon completion of drilling. Boreholes were backfilled with auger cuttings mixed with bentonite.

3.3 LOCATION AND ELEVATION SURVEY

The borehole locations and geodetic elevations were surveyed in the field by Stantec personnel using a Trimble Geo XH GPS. The elevations are accurate to 0.1 m. Table 3.1 summarizes the borehole information.

Table 3.1: Borehole Summary

	Boreholes		
	BH15-10	BH15-11	BH15-12
MTM Zone 10 Coordinates			
Northing	4791545	4791539	4791557
Easting	239972	239955	239931
Ground Surface Elevation, m	291.6	295.7	292.5
Total Depth Drilled, m	6.1	9.8	6.1
End of Borehole Elevation, m	285.5	286.0	286.4
Depth Augered, m	NA	9.8	NA
Depth of DCPT from ground surface	6.1	NA	6.1
Depth of Sampling	6.1	9.8	6.1
Number of Soil Samples	8	13	8

3.4 LABORATORY TESTING

All samples were taken to our Ottawa laboratory where they were subjected to a detailed visual examination by a Geotechnical Engineer. Selected soil samples underwent gradation analysis, Atterberg limits testing and moisture content testing. Two samples were submitted to Parcel Laboratories of Ottawa for analysis of pH, soluble sulphate content, chloride content and resistivity. Laboratory testing summary is shown in the Table below.

Table 3.2: Laboratory Testing for Culvert Site

Laboratory Testing	Moisture Content	Gradation Analysis	Atterberg Limits	Chemical Analysis
Number of Tests	36	10	8	2

FINAL FOUNDATION INVESTIGATION REPORT

January 2017

Samples remaining after testing will be placed in storage for a period of one year after issuance of the final report. After the storage period, the samples will be discarded unless we are directed otherwise by MTO.

4.0 SUBSURFACE CONDITIONS

4.1 SUBSURFACE PROFILE

The subsurface conditions observed in the boreholes are presented in detail on the Borehole Records provided in Appendix B. An explanation of the symbols and terms used to describe the Borehole Records is also provided.

In general, the subsurface stratigraphy consisted of a pavement structure over fill underlain by clayey silt over peat underlain by sandy silt to silty sand.

Borehole location plans and stratigraphic section of the soils encountered within the boreholes are provided on Drawing No. 1 in Appendix A.

4.1.1 PAVEMENT

70 mm of asphalt pavement was encountered in BH15-11.

4.1.2 Fill

Fill material was encountered beneath the asphalt pavement in BH15-11 and at the ground surface in BH15-10 and BH15-12. The fill consisted of brown to grey silty sand with/without gravel. Organic material was observed within the fill in borehole BH15-12. Fill material was described as moist to wet. The fill was approximately 1.6 m, 3.8 m, and 1.8 m thick and extended to the elevations of 290.0 m, 291.9 m, and 290.7 m in BH15-10, BH15-11, and BH15-12, respectively.

In this layer, the SPT N-values ranged from 6 to 16 blows per 0.3 m and the DCPT results ranged from 1 to 13. The results suggest a loose to compact state.

Moisture content and grain size distribution tests carried out on representative samples of the fill yielded the following results:

Gravel:	11 and 35%
Sand:	29 and 50%
Silt:	15 to 41%
Clay:	7 to 8%
Moisture Content:	4 to 19%

FINAL FOUNDATION INVESTIGATION REPORT

January 2017

Moisture content of the organic fill in BH15-12 ranged from 48 to 97%. The grain size distribution curve for the fill material is provided in Figure No. 1 of Appendix C.

Two Atterberg Limit tests were also performed on the fill samples. The Atterberg Limit tests yielded that the samples are non-plastic. The results are shown in Figure No. 4 of Appendix C.

4.1.3 Clayey SILT

Clayey silt layer was encountered beneath the fill in BH15-12. The clayey silt was approximately 1.1 m thick and extended to elevation of 289.6 m in BH15-12. Clayey silt was also encountered interlayered within the sandy silt to silty sand layer between elevations of 288.6 m and 283.1 m in BH15-10.

In this layer, the DCPT results ranged from 5 to 19. The results suggest a firm to very stiff consistency. The clayey silt was described as wet.

Moisture content, Atterberg limits, and grain size distribution tests carried out on a representative sample of the clayey silt yielded the following results:

Gravel:	0%
Sand:	4 to 7%
Silt:	75 to 79%
Clay:	17 to 18%
Moisture Content:	22 to 42%

The grain size distribution curve for the clayey silt is provided in Figure No. 2 of Appendix C.

Two Atterberg Limit tests were also performed on the clayey silt samples. The Atterberg Limit test yielded plasticity index of 8 and 13 and liquid limit of 22 and 32. The results suggest a low to medium plasticity. The results are shown in Figure No. 4 of Appendix C.

4.1.4 PEAT

A peat layer was encountered beneath the fill in BH15-10 and beneath the clayey silt in BH15-12. The peat layer was approximately 1.4 m and 1.7 m thick and extended to the elevations of 288.6 m and 287.9 m in BH15-10 and BH15-12 respectively.

The moisture content of the peat layer was 95 % to 360 %. The organic content results tested were 76 and 31% for sample SS3 in BH15-10 and sample SS5 in BH15-12 respectively.

4.1.5 Sandy SILT to Silty SAND

Sandy silt to silty sand layer was encountered beneath the peat in BH15-10 and BH15-12 and beneath the fill in BH15-11. The deposit extended to the termination depths of these boreholes. Clayey silt was also encountered interlayered within the layer between elevations of 288.6 m and 283.1 m in BH15-10.

FINAL FOUNDATION INVESTIGATION REPORT

January 2017

In this layer, the SPT N-values ranged from 7 to 21 blows per 0.3 m and the DCPT results ranged from 22 to 42. The results suggest a loose to dense state.

Moisture content, Atterberg limits, and grain size distribution tests carried out on representative samples of the sandy silt to silty sand yielded the following results:

Gravel:	4 to 13%
Sand:	37 to 63%
Silt:	29 to 79%
Clay:	2 to 17%
Moisture Content:	9 to 37%

The grain size distribution curves for the sandy silt to silty sand material are provided in Figure No. 3 of Appendix C.

Four Atterberg Limit tests were also performed on the sandy silt to silty sand samples. The Atterberg Limit tests yielded that three samples were non-plastic and one sample from BH15-10 indicated a plasticity index of 8 and a liquid limit of 22. The results are shown in Figure No. 4 of Appendix C.

4.1.6 Groundwater

No water was observed in the culvert at the time of the drilling.

The groundwater levels were inferred in open holes and inferred from the wetness of the sample at the time of drilling. Groundwater levels are provided in the Table below.

Table 4.1: Inferred and Measured Groundwater levels

Borehole No.	Observation/Measurement Date	Groundwater Depth (m)	Ground Surface Elevation(m)	Groundwater Elevation (m)
BH15-10	June 24, 2015	0.0 (inferred)	291.6	291.6
BH15-11	June 9, 2015	2.3 (inferred)	295.7	293.4
BH15-12	June 24, 2015	0.7 (inferred)	292.5	291.8

The groundwater level of 293.4 m inferred in BH15-11 is 1.6 m to 1.8 m higher than the water level inferred in BH15-10 and BH15-12. The water level in BH15-11 is likely not representative of the groundwater level, the groundwater level is likely lower.

Fluctuations in the groundwater due to seasonal variations or in response to a particular precipitation event should be anticipated.

5.0 CHEMICAL ANALYSIS

Two soil samples were submitted to Paracel Laboratories in Ottawa, Ontario, for analysis of pH, water soluble sulphate and chloride concentration, and resistivity. The analysis results are provided in Table 5.1.

Table 5.1: Results of Chemical Analysis

Borehole No	Sample No.	Depth (m)	pH	Chloride (µg/g)	Sulphate (µg/g)	Resistivity (Ohm-m)
BH15-10	SS2	0.76 to 1.51	7.12	12	<5	63.0
BH15-11	SS5	3.05 to 3.66	7.45	369	73	11.2

6.0 MISCELLANEOUS

The field work was carried out under the supervision of Athir Nader, E.I.T., under the direction of Christopher McGrath, P.Eng.

USL-1 Underground Service Locators Inc. of Ottawa, Ontario, carried out the private and public utility locates for the boreholes.

The CME 75 drilling equipment drilling equipment was supplied and operated by Downing Drilling of Hawkesbury, Ontario on June 9, 2015. Portable drilling equipment was supplied and operated by Sonic Soil Sampling of Concord, Ontario on June 24, 2015.

Elevation and location survey of the borehole locations was carried out by Stantec personnel.

Geotechnical laboratory testing was carried out at Stantec's Ottawa laboratory.

This report was prepared by Athir Nader, and reviewed by Christopher McGrath and Raymond Haché, MTO Designated Principal Contact.

7.0 CLOSURE

A subsurface investigation is a limited sampling of a site. The subsurface conditions given herein are based on information gathered at the specific borehole locations. Should any conditions at the site be encountered which differ from those at the borehole locations, we request that we be notified immediately in order to assess the additional information.

Respectfully Submitted;

STANTEC CONSULTING LTD.



Christopher McGrath, P.Eng.
Associate- Senior Geotechnical Engineer

Raymond Haché, M.Sc., P.Eng.
Designated Principal MTO Foundation Contact




\\cd\218-f02\work_group2\01224\active\other_pc_projects\165000903\reports\culvert 17\rpt_fir_final_culvert_17_201701.docx

APPENDIX A

Drawing No. 1 – Borehole Location Plan and Soil Strata Plot

Site Photos

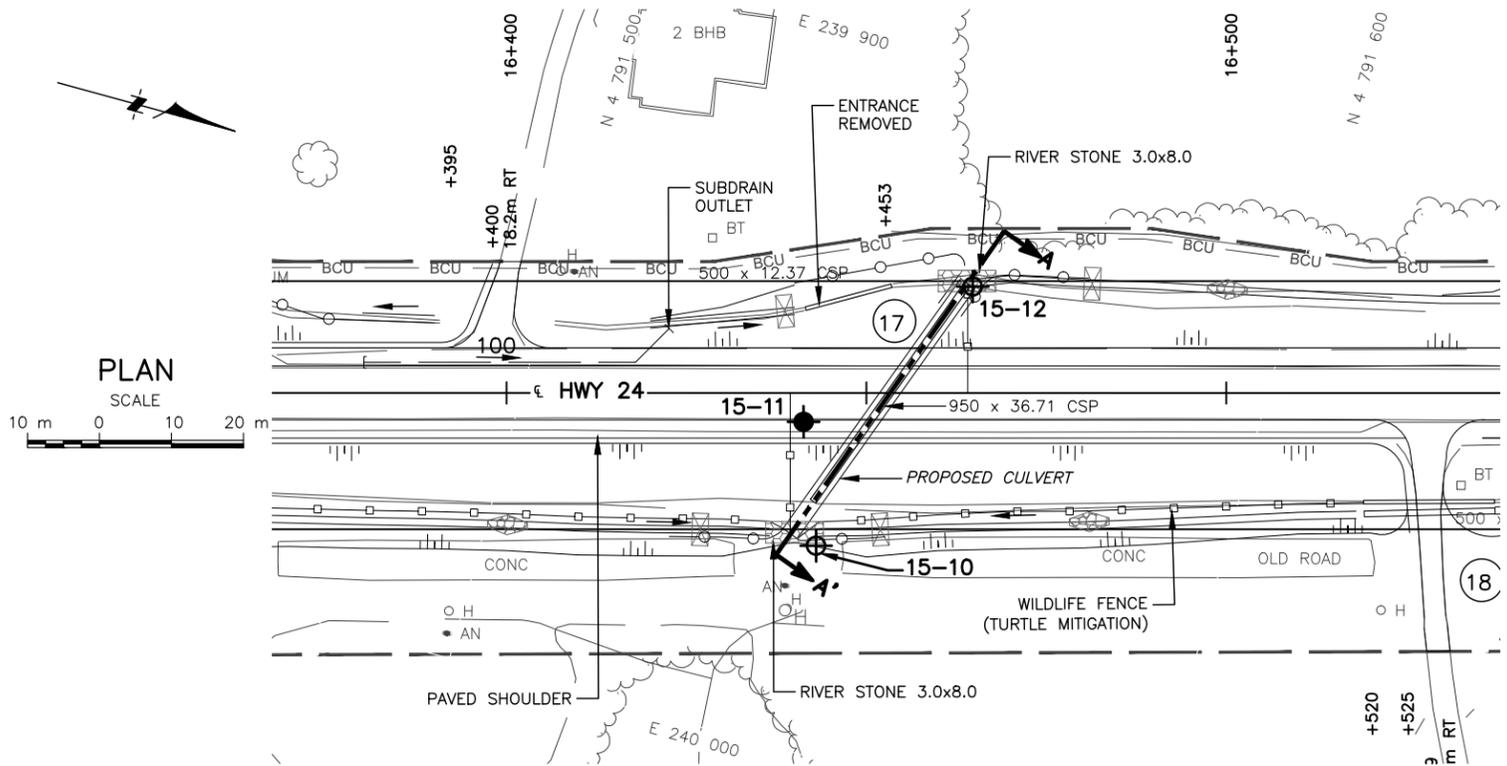


METRIC
DIMENSIONS ARE IN METRES
AND/OR MILLIMETRES
UNLESS OTHERWISE SHOWN

PLATE No
CONT
WP 3065-11-00



HWY 24, TWP OF S DUMFRIES, ON
CULVERT AT STA 16+453 (SITE 17)
BOREHOLE LOCATIONS & SOIL STRATA

SHEET

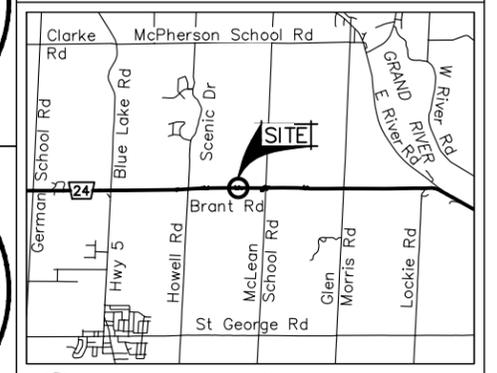

LEGEND

- Borehole
- Dynamic Cone Penetration Test (Cone)
- (x.x m) Offset from Cross Section Line in meters
- N Blows/0.3m (Std Pen Test, 475 J/blow)
- CONE Blows/0.3m (60° Cone, 475 J/blow)
- Inferred WL at time of investigation, June 2015

No	ELEVATION	MTM_ZONE 10 NORTH	COORDINATES EAST
15-10	291.6	4 791 545.0	239 971.5
15-11	295.7	4 791 538.8	239 955.4
15-12	292.5	4 971 556.6	239 931.1

NOTES


The boundaries between soil strata have been established only at borehole locations. Between boreholes the boundaries are assumed from geological evidence.

This drawing is for subsurface information only. Surface details and features are for conceptual illustration.

NOTE: The complete foundation investigation and design report for this project and other related documents may be examined at the Engineering Materials Office, Downsview. Information contained in this report and related documents is specifically excluded in accordance with the conditions of Section 102-2 of Form 100.

REVISIONS	DATE	BY	DESCRIPTION
2017-01-09	CM	ADDED	GEOGRES NUMBER

GEOGRES No	40P08-239
HWY No	HWY 24
SUBM'D AN	CHECKED
DATE	2015-12-11
SITE	C17
DRAWN	GBB
CHECKED	APPROVED
DWG	1

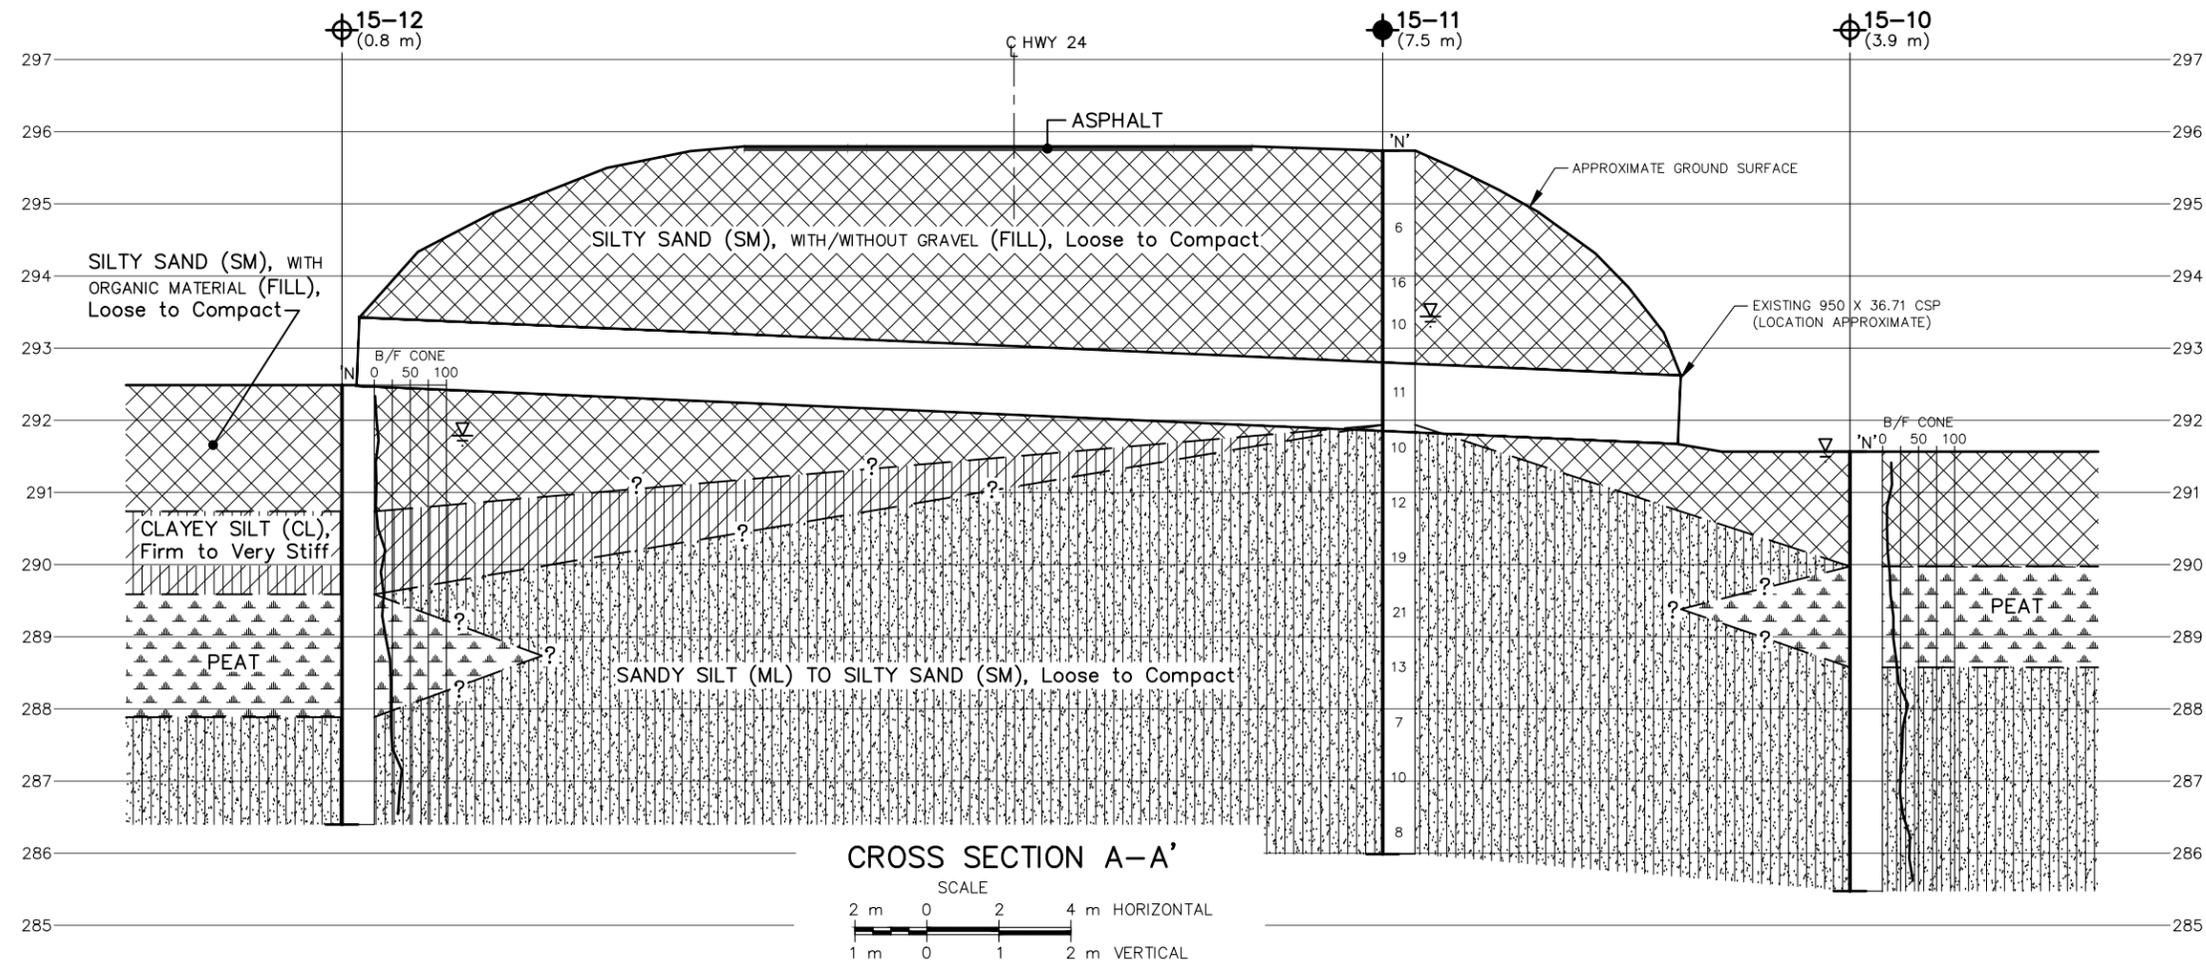



Project No.: 165000903

GWP: 3065-11-00

Site Photographs

Project Name: Culvert at Station 16+453, Highway
24 Pavement Rehabilitation,
Township of South Dumfries, ON

Date: June 9, 2015



Site Photo No.: 1

Looking north on BH15-11



Site Photo No.: 2

Looking south on BH15-11



Project No.: 165000903

GWP: 3065-11-00

Site Photographs

Project Name: Culvert at Station 16+453, Highway
24 Pavement Rehabilitation,
Township of South Dumfries, ON

Date: June 9, 2015



Site Photo No.: 3

Looking southeast toward BH15-10 on BH15-11



Site Photo No.: 4

Looking northwest toward BH15-12 on BH15-11



Project No.: 165000903

GWP: 3065-11-00

Site Photographs

Project Name: Culvert at Station 16+453, Highway
24 Pavement Rehabilitation,
Township of South Dumfries, ON

Date: June 24, 2015



Site Photo No.: 5

Looking northwest near BH15-10



Site Photo No.: 6

Looking northeast on BH15-12

APPENDIX B

Symbols and Terms Used on Borehole Records

Borehole Records

SYMBOLS AND TERMS USED ON BOREHOLE AND TEST PIT RECORDS

SOIL DESCRIPTION

Terminology describing common soil genesis:

<i>Rootmat</i>	- vegetation, roots and moss with organic matter and topsoil typically forming a mattress at the ground surface
<i>Topsoil</i>	- mixture of soil and humus capable of supporting vegetative growth
<i>Peat</i>	- mixture of visible and invisible fragments of decayed organic matter
<i>Till</i>	- unstratified glacial deposit which may range from clay to boulders
<i>Fill</i>	- material below the surface identified as placed by humans (excluding buried services)

Terminology describing soil structure:

<i>Desiccated</i>	- having visible signs of weathering by oxidization of clay minerals, shrinkage cracks, etc.
<i>Fissured</i>	- having cracks, and hence a blocky structure
<i>Varved</i>	- composed of regular alternating layers of silt and clay
<i>Stratified</i>	- composed of alternating successions of different soil types, e.g. silt and sand
<i>Layer</i>	- > 75 mm in thickness
<i>Seam</i>	- 2 mm to 75 mm in thickness
<i>Parting</i>	- < 2 mm in thickness

Terminology describing soil types:

The classification of soil types are made on the basis of grain size and plasticity in accordance with the Unified Soil Classification System (USCS) (ASTM D 2487 or D 2488) which excludes particles larger than 75 mm. For particles larger than 75 mm, and for defining percent clay fraction in hydrometer results, definitions proposed by Canadian Foundation Engineering Manual, 4th Edition are used. The USCS provides a group symbol (e.g. SM) and group name (e.g. silty sand) for identification.

Terminology describing cobbles, boulders, and non-matrix materials (organic matter or debris):

Terminology describing materials outside the USCS, (e.g. particles larger than 75 mm, visible organic matter, and construction debris) is based upon the proportion of these materials present:

<i>Trace, or occasional</i>	Less than 10%
<i>Some</i>	10-20%
<i>Frequent</i>	> 20%

Terminology describing compactness of cohesionless soils:

The standard terminology to describe cohesionless soils includes compactness (formerly "relative density"), as determined by the Standard Penetration Test (SPT) N-Value - also known as N-Index. The SPT N-Value is described further on page 3. A relationship between compactness condition and N-Value is shown in the following table.

Compactness Condition	SPT N-Value
<i>Very Loose</i>	<4
<i>Loose</i>	4-10
<i>Compact</i>	10-30
<i>Dense</i>	30-50
<i>Very Dense</i>	>50

Terminology describing consistency of cohesive soils:

The standard terminology to describe cohesive soils includes the consistency, which is based on undrained shear strength as measured by *in situ* vane tests, penetrometer tests, or unconfined compression tests. Consistency may be crudely estimated from SPT N-Value based on the correlation shown in the following table (Terzaghi and Peck, 1967). The correlation to SPT N-Value is used with caution as it is only very approximate.

Consistency	Undrained Shear Strength		Approximate SPT N-Value
	kips/sq.ft.	kPa	
<i>Very Soft</i>	<0.25	<12.5	<2
<i>Soft</i>	0.25 - 0.5	12.5 - 25	2-4
<i>Firm</i>	0.5 - 1.0	25 - 50	4-8
<i>Stiff</i>	1.0 - 2.0	50 - 100	8-15
<i>Very Stiff</i>	2.0 - 4.0	100 - 200	15-30
<i>Hard</i>	>4.0	>200	>30

ROCK DESCRIPTION

Except where specified below, terminology for describing rock is as defined by the International Society for Rock Mechanics (ISRM) 2007 publication "The Complete ISRM Suggested Methods for Rock Characterization, Testing and Monitoring: 1974-2006"

Terminology describing rock quality:

RQD	Rock Mass Quality
0-25	<i>Very Poor Quality</i>
25-50	<i>Poor Quality</i>
50-75	<i>Fair Quality</i>
75-90	<i>Good Quality</i>
90-100	<i>Excellent Quality</i>

Alternate (Colloquial) Rock Mass Quality	
<i>Very Severely Fractured</i>	<i>Crushed</i>
<i>Severely Fractured</i>	<i>Shattered or Very Blocky</i>
<i>Fractured</i>	<i>Blocky</i>
<i>Moderately Jointed</i>	<i>Sound</i>
<i>Intact</i>	<i>Very Sound</i>

RQD (Rock Quality Designation) denotes the percentage of intact and sound rock retrieved from a borehole of any orientation. All pieces of intact and sound rock core equal to or greater than 100 mm (4 in.) long are summed and divided by the total length of the core run. RQD is determined in accordance with ASTM D6032.

SCR (Solid Core Recovery) denotes the percentage of solid core (cylindrical) retrieved from a borehole of any orientation. All pieces of solid (cylindrical) core are summed and divided by the total length of the core run (It excludes all portions of core pieces that are not fully cylindrical as well as crushed or rubble zones).

Fracture Index (FI) is defined as the number of naturally occurring fractures within a given length of core. The Fracture Index is reported as a simple count of natural occurring fractures.

Terminology describing rock with respect to discontinuity and bedding spacing:

Spacing (mm)	Discontinuities	Bedding
>6000	<i>Extremely Wide</i>	-
2000-6000	<i>Very Wide</i>	<i>Very Thick</i>
600-2000	<i>Wide</i>	<i>Thick</i>
200-600	<i>Moderate</i>	<i>Medium</i>
60-200	<i>Close</i>	<i>Thin</i>
20-60	<i>Very Close</i>	<i>Very Thin</i>
<20	<i>Extremely Close</i>	<i>Laminated</i>
<6	-	<i>Thinly Laminated</i>

Terminology describing rock strength:

Strength Classification	Grade	Unconfined Compressive Strength (MPa)
<i>Extremely Weak</i>	R0	<1
<i>Very Weak</i>	R1	1 – 5
<i>Weak</i>	R2	5 – 25
<i>Medium Strong</i>	R3	25 – 50
<i>Strong</i>	R4	50 – 100
<i>Very Strong</i>	R5	100 – 250
<i>Extremely Strong</i>	R6	>250

Terminology describing rock weathering:

Term	Symbol	Description
<i>Fresh</i>	W1	No visible signs of rock weathering. Slight discoloration along major discontinuities
<i>Slightly</i>	W2	Discoloration indicates weathering of rock on discontinuity surfaces. All the rock material may be discolored.
<i>Moderately</i>	W3	Less than half the rock is decomposed and/or disintegrated into soil.
<i>Highly</i>	W4	More than half the rock is decomposed and/or disintegrated into soil.
<i>Completely</i>	W5	All the rock material is decomposed and/or disintegrated into soil. The original mass structure is still largely intact.
<i>Residual Soil</i>	W6	All the rock converted to soil. Structure and fabric destroyed.

STRATA PLOT

Strata plots symbolize the soil or bedrock description. They are combinations of the following basic symbols. The dimensions within the strata symbols are not indicative of the particle size, layer thickness, etc.



SAMPLE TYPE

SS	Split spoon sample (obtained by performing the Standard Penetration Test)
ST	Shelby tube or thin wall tube
DP	Direct-Push sample (small diameter tube sampler hydraulically advanced)
PS	Piston sample
BS	Bulk sample
HQ, NQ, BQ, etc.	Rock core samples obtained with the use of standard size diamond coring bits.

WATER LEVEL MEASUREMENT



measured in standpipe, piezometer, or well



inferred

RECOVERY

For soil samples, the recovery is recorded as the length of the soil sample recovered. For rock core, recovery is defined as the total cumulative length of all core recovered in the core barrel divided by the length drilled and is recorded as a percentage on a per run basis.

N-VALUE

Numbers in this column are the field results of the Standard Penetration Test: the number of blows of a 140 pound (63.5 kg) hammer falling 30 inches (760 mm), required to drive a 2 inch (50.8 mm) O.D. split spoon sampler one foot (300 mm) into the soil. In accordance with ASTM D1586, the N-Value equals the sum of the number of blows (N) required to drive the sampler over the interval of 6 to 18 in. (150 to 450 mm). However, when a 24 in. (610 mm) sampler is used, the number of blows (N) required to drive the sampler over the interval of 12 to 24 in. (300 to 610 mm) may be reported if this value is lower. For split spoon samples where insufficient penetration was achieved and N-Values cannot be presented, the number of blows are reported over sampler penetration in millimetres (e.g. 50/75). Some design methods make use of N-values corrected for various factors such as overburden pressure, energy ratio, borehole diameter, etc. No corrections have been applied to the N-values presented on the log.

DYNAMIC CONE PENETRATION TEST (DCPT)

Dynamic cone penetration tests are performed using a standard 60 degree apex cone connected to 'A' size drill rods with the same standard fall height and weight as the Standard Penetration Test. The DCPT value is the number of blows of the hammer required to drive the cone one foot (300 mm) into the soil. The DCPT is used as a probe to assess soil variability.

OTHER TESTS

S	Sieve analysis
H	Hydrometer analysis
k	Laboratory permeability
γ	Unit weight
G_s	Specific gravity of soil particles
CD	Consolidated drained triaxial
CU	Consolidated undrained triaxial with pore pressure measurements
UU	Unconsolidated undrained triaxial
DS	Direct Shear
C	Consolidation
Q_u	Unconfined compression
I_p	Point Load Index (I_p on Borehole Record equals $I_p(50)$ in which the index is corrected to a reference diameter of 50 mm)

	Single packer permeability test; test interval from depth shown to bottom of borehole
	Double packer permeability test; test interval as indicated
	Falling head permeability test using casing
	Falling head permeability test using well point or piezometer



RECORD OF BOREHOLE No BH15-10

1 OF 1

METRIC

W.P. 3065-11-00 LOCATION Hwy 24, Township of South Dumfries, ON N: 4 791 545 E: 239 972 ORIGINATED BY AN
 DIST South Dumfries HWY 24 BOREHOLE TYPE Portable Equipment, DCPT - Pionjar Split spoon Sampler COMPILED BY AN
 DATUM Geodetic DATE 2015 06 24 - 2015 06 24 CHECKED BY CM

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)				
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE			"N" VALUES	SHEAR STRENGTH kPa						WATER CONTENT (%)			
						20	40	60	80	100	10	20	30	GR	SA	SI	CL
291.6 0.0	FILL: silty SAND (SM) with/without gravel Loose to compact Brown to grey, moist to wet -Groundwater observed at ground surface	[Cross-hatch pattern]	1	SS	-									11	41	41	7
			2	SS	-												
290.0 1.6	PEAT Black, wet	[Wavy lines]	3	SS	-												
			4	SS	-												
288.6 3.0	Sandy SILT (ML) to silty SAND (SM) Compact to dense Grey to brown, wet -Clayey SILT interlayered from 3.0 m to 5.5 m	[Dotted pattern]	5	SS	-												
			6	SS	-									0	4	79	17
			7	SS	-												
			8	SS	-									4	43	46	7
285.5 6.1	End of Borehole -Split spoon sampler was advanced using a Pionjar jackhammer -DCPT was carried out using a 70 lb weight hammer and 30 in. drop -DCPT values corrected for 50% of the field values																

STN13-ONTARIO MTO STANTEC 165000903 - PAVEMENT REHAB HWY 24 - MTO.GPJ ONTARIO MTO.GDT 9/11/15

✕³, ✕₃: Numbers refer to Sensitivity ○³% STRAIN AT FAILURE



RECORD OF BOREHOLE No BH15-11

1 OF 1

METRIC

W.P. 3065-11-00 LOCATION Hwy 24, Township of South Dumfries, ON N: 4 791 539 E: 239 955 ORIGINATED BY AN
 DIST South Dumfries HWY 24 BOREHOLE TYPE Hollow Stem Augers - Split spoon Sampler COMPILED BY AN
 DATUM Geodetic DATE 2015 06 09 - 2015 06 09 CHECKED BY CM

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT					PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)
ELEV. DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE			"N" VALUES	SHEAR STRENGTH kPa								
						20	40	60	80	100						
295.7 290.1	70 mm ASPHALT Fill: silty SAND (SM) with/without gravel Loose to compact Brown to grey, moist to wet -Groundwater observed at a depth of 2.3 m		1	GS	-											35 50 (15)
			2	SS	6											
			3	SS	16											12 43 37 non-plastic 8
			4	SS	10											
			5	SS	11											
291.9 3.8	Sandy SILT (ML) to silty SAND (SM) Loose to compact Brown to grey, wet -Cobbles and boulders encountered between 8.3 m and 9.0 m		6	SS	10											10 37 43 non-plastic 10
			7	SS	12											
			8	SS	19											
			9	SS	21											
			10	SS	13											13 43 37 non-plastic 7
			11	SS	7											
			12	SS	10											
			13	SS	8											
286.0 9.8	End of Borehole															

STN13-ONTARIO MTO STANTEC 165000903 - PAVEMENT REHAB HWY 24 - MTO.GPJ ONTARIO.MOT.GDT 9/11/15

×³, ×₃: Numbers refer to Sensitivity ○³% STRAIN AT FAILURE



RECORD OF BOREHOLE No BH15-12

1 OF 1

METRIC

W.P. 3065-11-00 LOCATION Hwy 24, Township of South Dumfries, ON N: 4 791 557 E: 239 931 ORIGINATED BY AN
 DIST South Dumfries HWY 24 BOREHOLE TYPE Portable Equipment, DCPT - Pionjar Split spoon Sampler COMPILED BY AN
 DATUM Geodetic DATE 2015 06 24 - 2015 06 24 CHECKED BY CM

SOIL PROFILE		SAMPLES			GROUND WATER CONDITIONS	ELEVATION SCALE	DYNAMIC CONE PENETRATION RESISTANCE PLOT		PLASTIC LIMIT W _p	NATURAL MOISTURE CONTENT W	LIQUID LIMIT W _L	UNIT WEIGHT γ	REMARKS & GRAIN SIZE DISTRIBUTION (%)	
ELEV DEPTH	DESCRIPTION	STRAT PLOT	NUMBER	TYPE			"N" VALUES	SHEAR STRENGTH kPa						WATER CONTENT (%)
292.5	FILL: silty SAND (SM) with organic material Loose to compact Black, moist to wet, organic material -Groundwater observed at a depth of 0.7 m	[Cross-hatched pattern]	1	SS	-	[DCPT Plot Line]	20	40	60	80	100	89	25 29 38 8 non-plastic	
0.0			2	SS	-		20	40	60	80	100	97		
290.7	Clayey SILT (CL) Firm to very stiff Grey, wet	[Diagonal lines]	3	SS	-		291	20	40	60	80	100	48	0 7 75 18
1.8			4	SS	-		290	20	40	60	80	100	42	
289.6	PEAT Black, wet	[Wavy pattern]	5	SS	-		289	20	40	60	80	100	140	
2.9			6	SS	-		289	20	40	60	80	100	148	
287.9			7	SS	-		288	20	40	60	80	100	95	
286.4	Sandy SILT (ML) to silty SAND (SM) Loose to compact Grey to brown, wet	[Dotted pattern]	8	SS	-		287	20	40	60	80	100	95	6 63 29 2 non-plastic
4.6			8	SS	-	287	20	40	60	80	100	95		
286.4	6.1	End of Borehole												
-Split spoon sampler was advanced using a Pionjar jackhammer -DCPT was carried out using a 70 lb weight hammer and 30 in. drop -DCPT values corrected for 50% of the field values														

STN13-ONTARIO MTO STANTEC 165000903 - PAVEMENT REHAB HWY 24 - MTO.GPJ ONTARIO.MOT.GDT 9/11/15

✕³, ✕₃: Numbers refer to Sensitivity ○³% STRAIN AT FAILURE


APPENDIX C

Laboratory Test Results

Unified Soil Classification System

		SAND			Gravel	
CLAY & SILT		Fine	Medium	Coarse	Fine	Coarse

U.S. Std. Sieve No. 200 100 50 30 16 8 4

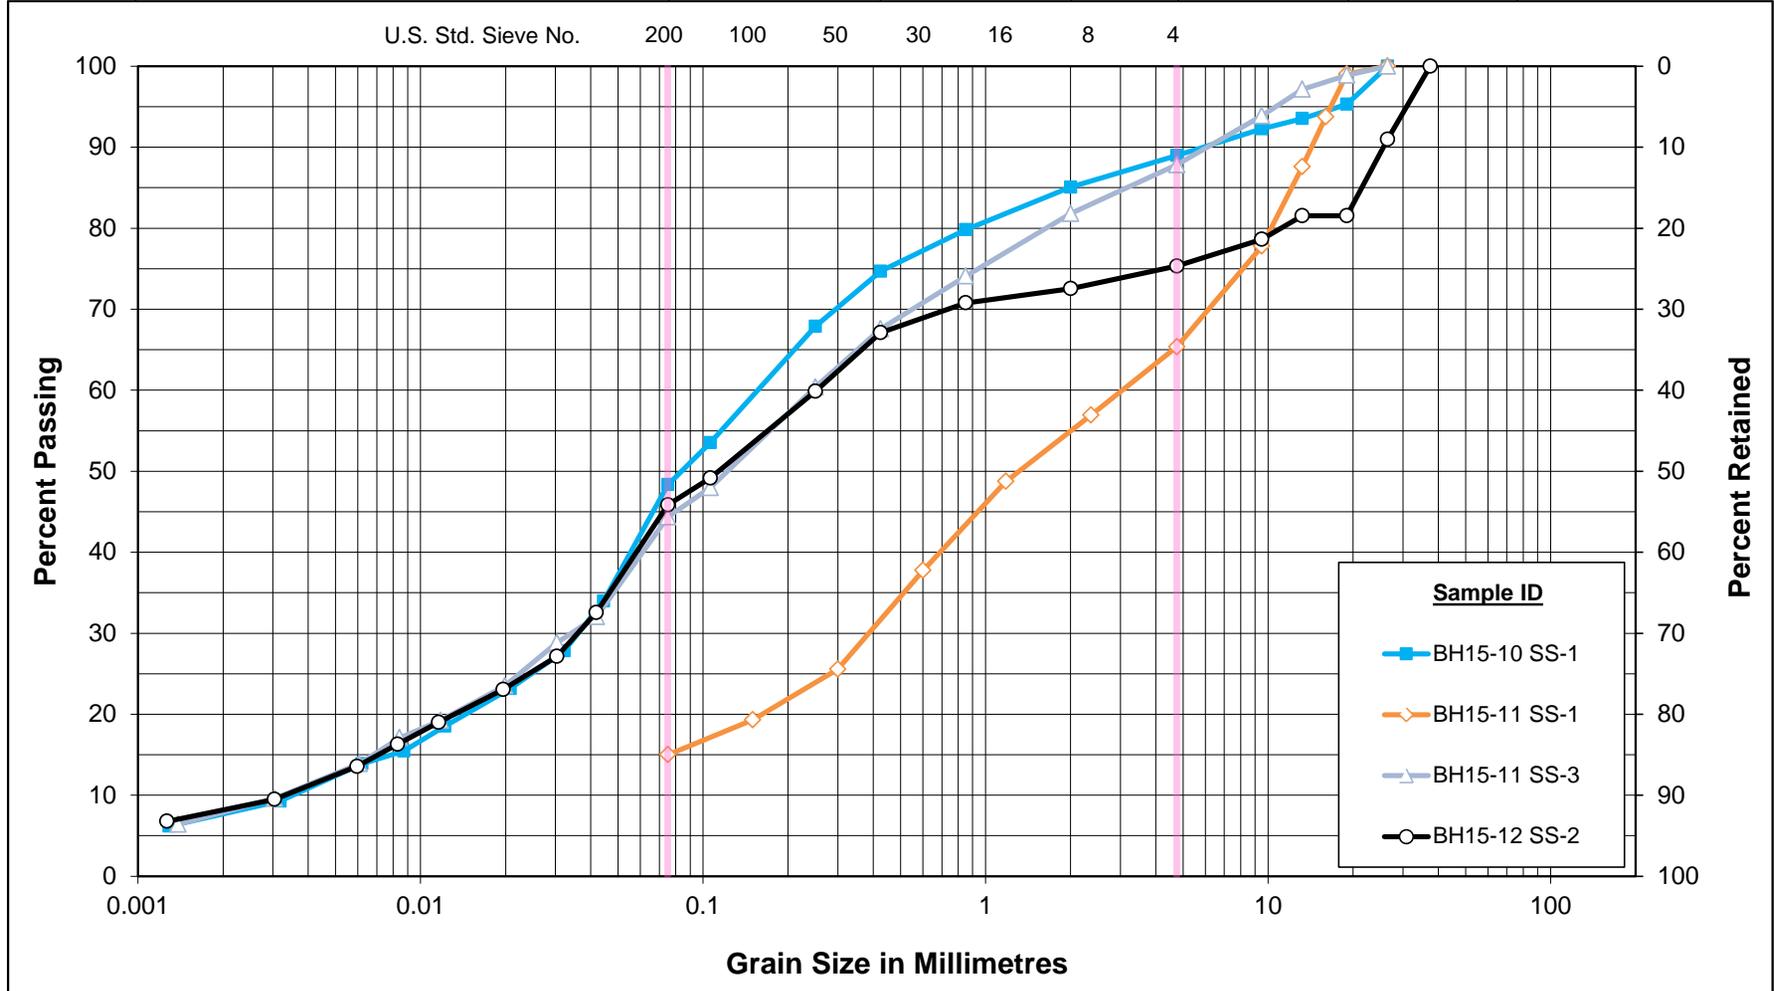


GRAIN SIZE DISTRIBUTION
FILL: Silty SAND (SM)
with/without Gravel

Figure No. 1

Project No. 165000903

Unified Soil Classification System

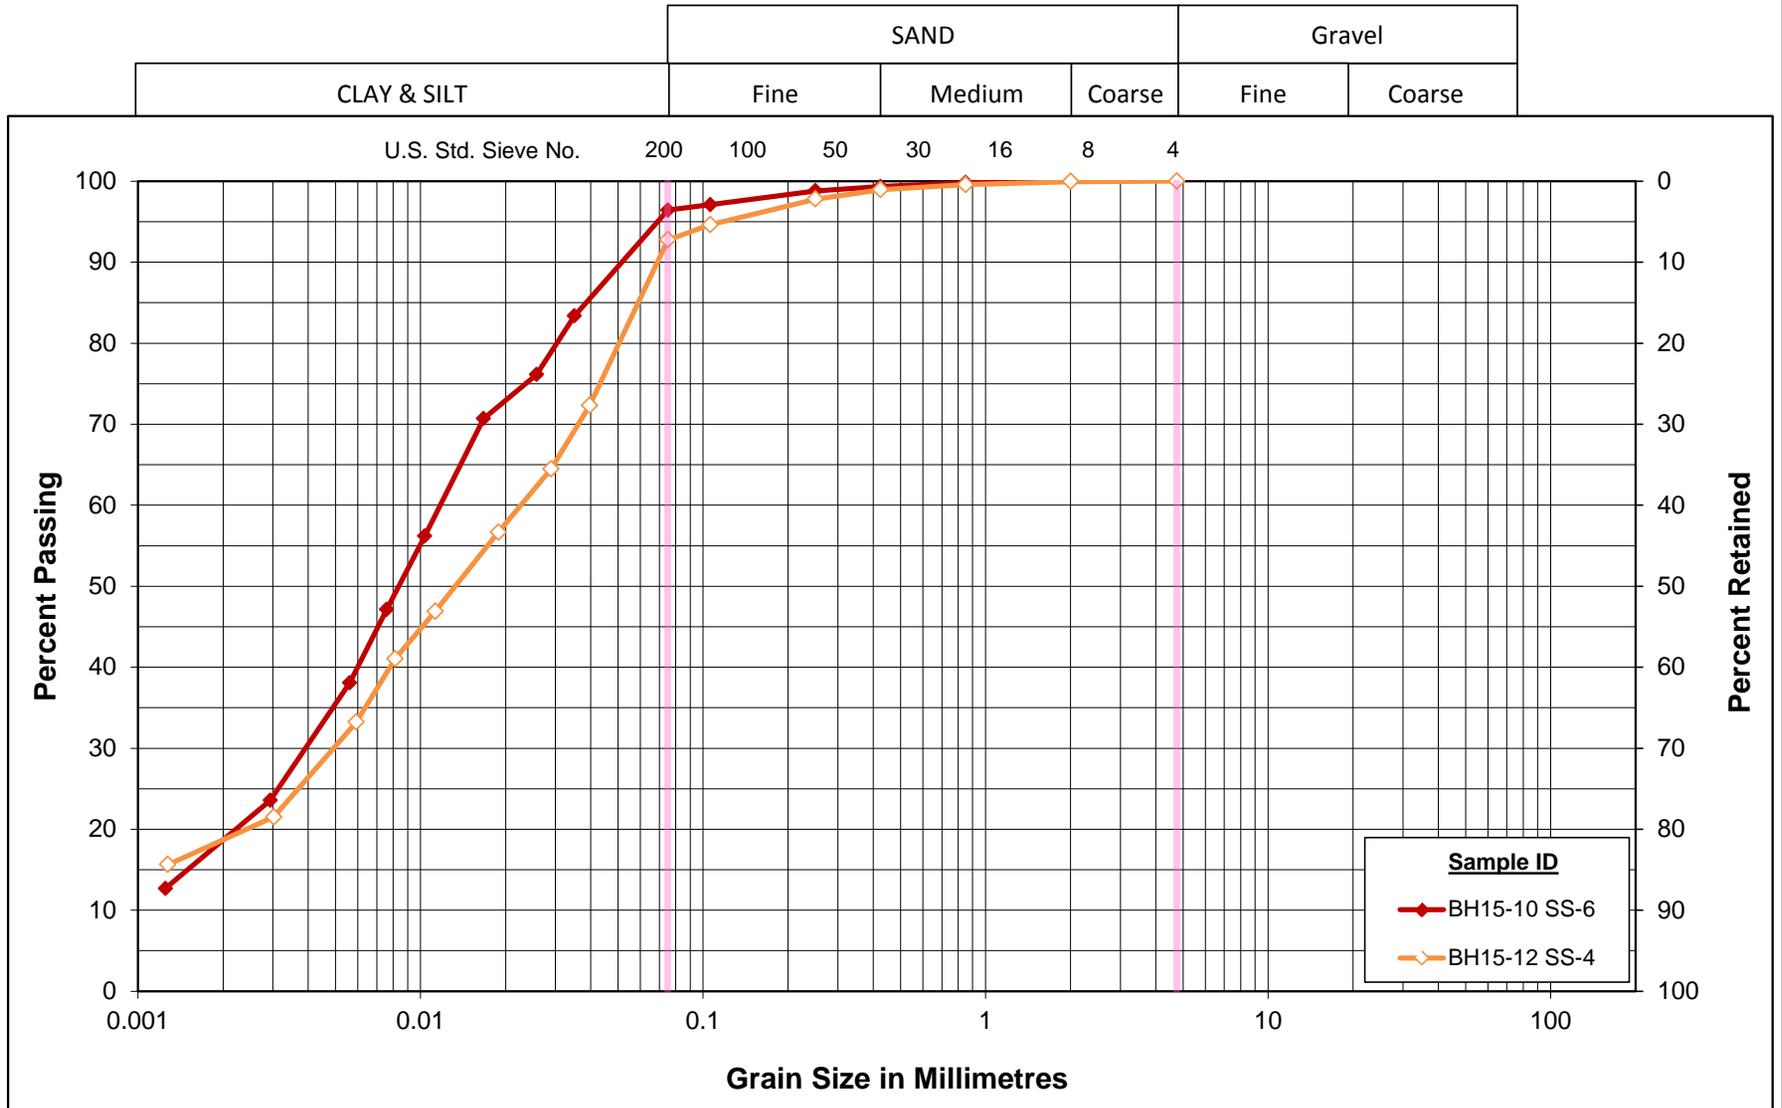


GRAIN SIZE DISTRIBUTION Clayey SILT (CL)

Figure No. 2

Project No. 165000903


Unified Soil Classification System

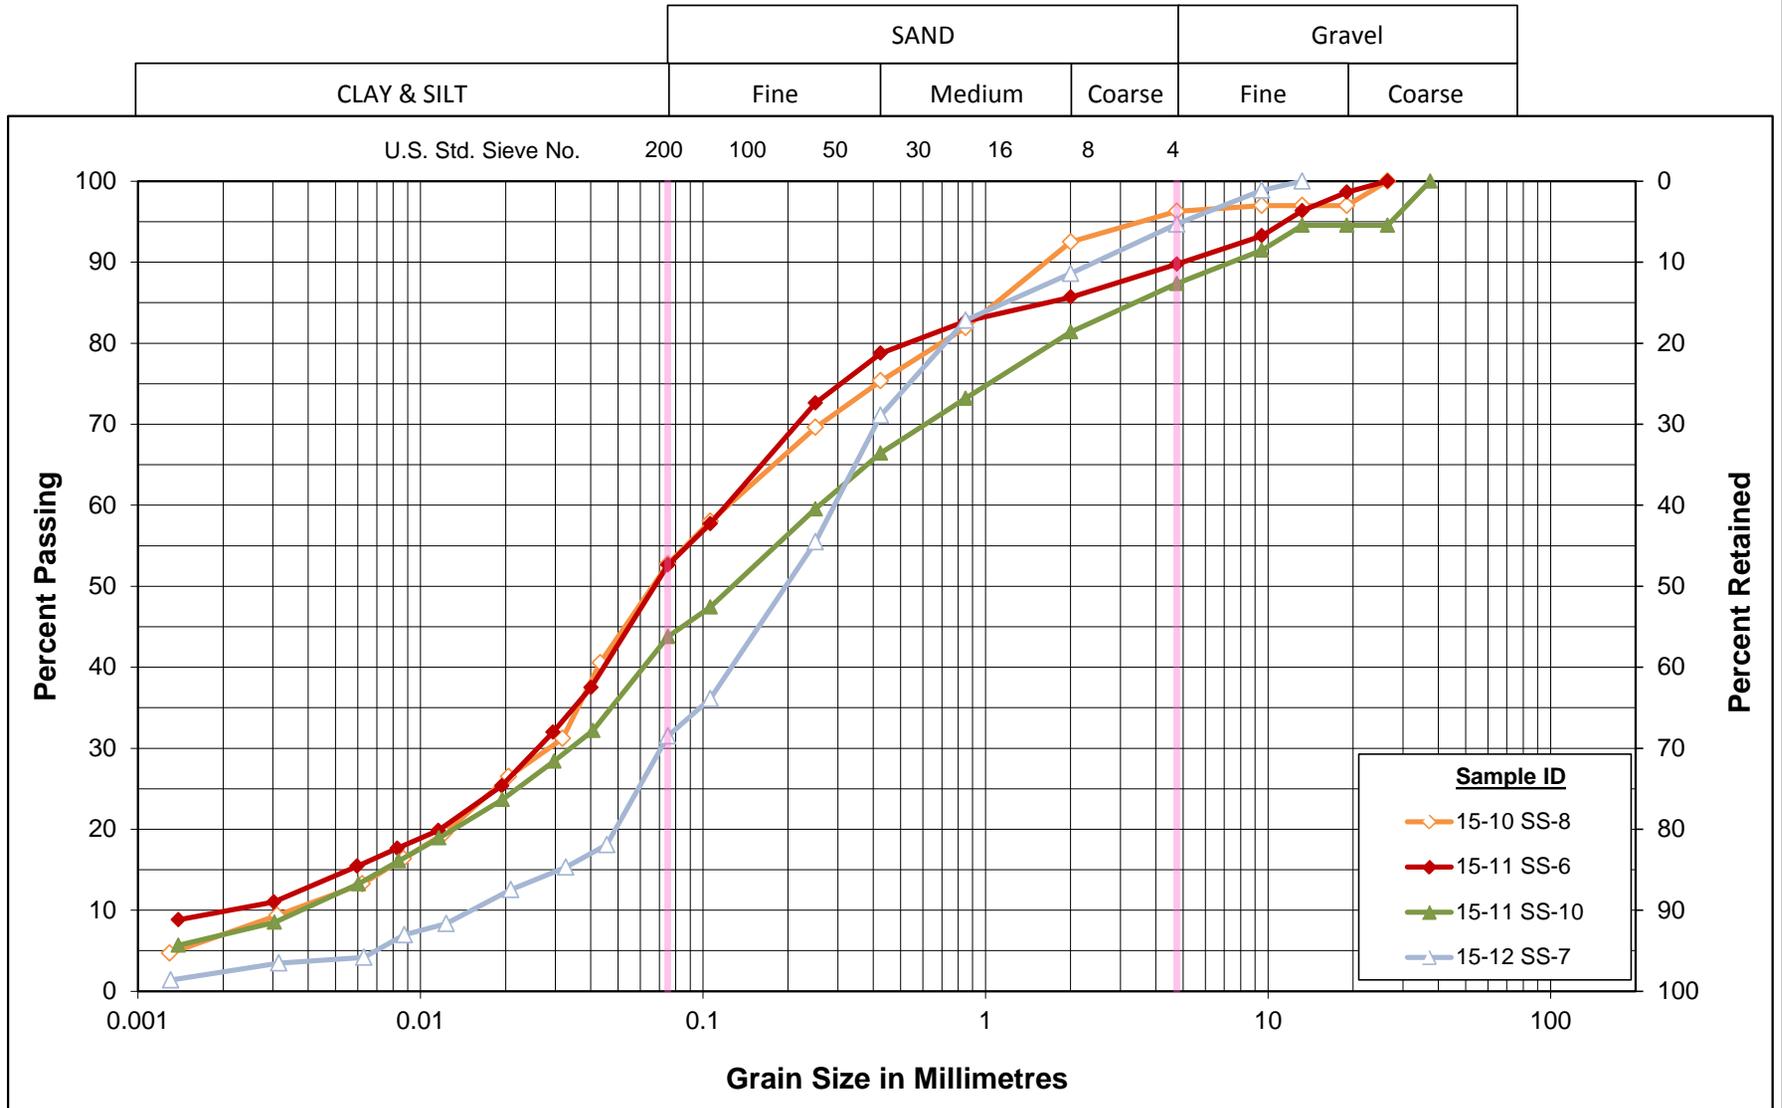

GRAIN SIZE DISTRIBUTION
Sandy SILT (ML) to Silty SAND (SM)

Figure No. 3

Project No. 165000903

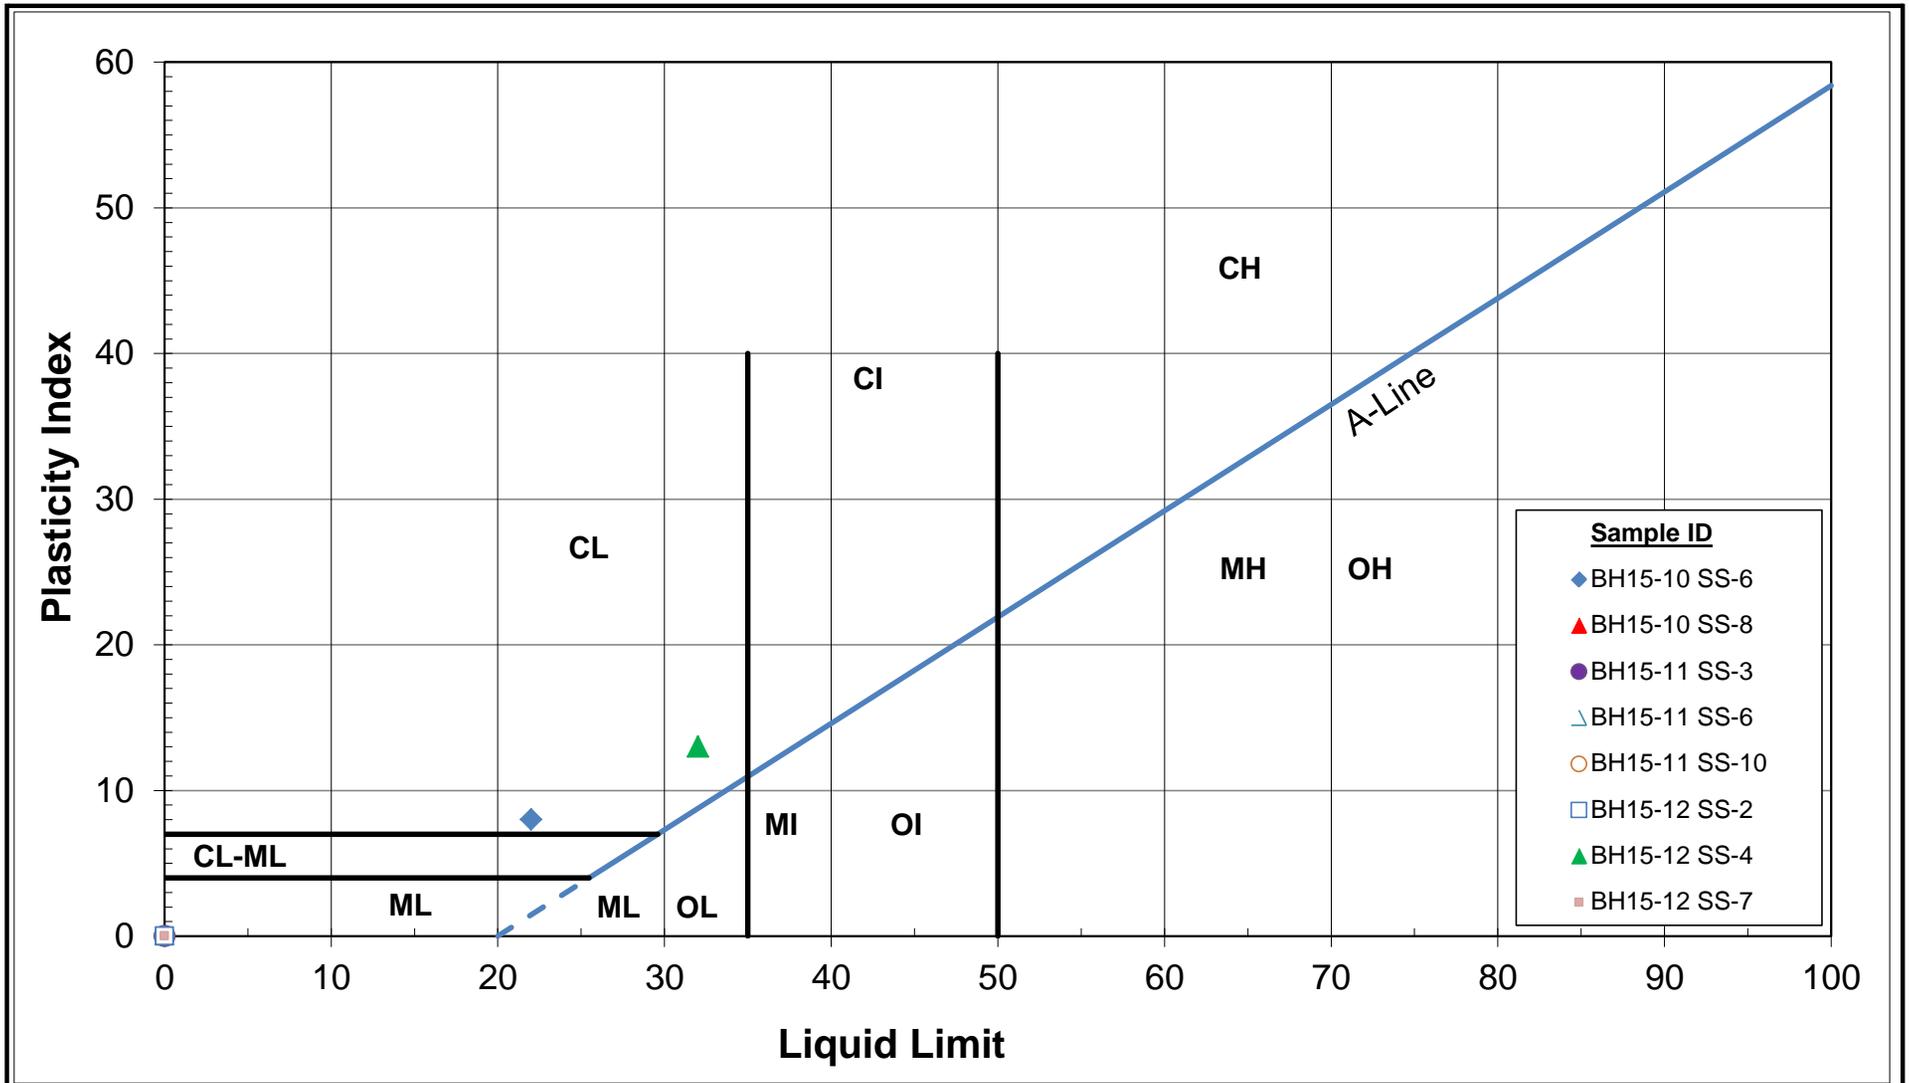

PLASTICITY CHART

Figure No. 4

Project No. 165000903